Team Asph · Software Design · Cebu Institute of Technology – University

SEIskolar

Software Design Deliverable Package

The design of a system for DOST-SEI undergraduate scholars: 10 swimlanes with 107 numbered steps, 29 screens in 42 states as low-fidelity wireframes and high-fidelity screens, each on a phone, a tablet and a desktop, the copy of the design in Figma, the requirements each part traces to, and the project plan: risk matrix, work breakdown structure and Gantt chart.

Team Asph

Adrian Seth Tabotabo
Project Manager: reviews and merges every change · @dreeyanzz · 2 swimlanes, 6 screens

Genril Theo Soroño
Member · @gnthril · 2 swimlanes, 6 screens

Althea Maeve Kinaadman
Member · @Tiamporado · 2 swimlanes, 5 screens

Zedric Camilotes
Member · @zedric-git · 2 swimlanes, 6 screens

Dorothy Biatriz Capao
Member · @dbeenutsz · 2 swimlanes, 6 screens

About this package

Course	Software Design
Institution	Cebu Institute of Technology – University (CIT-U)
Date	26 October 2026
Schedule	17 August to 10 December 2026, the final presentation
Requirements	Software Requirements Specification, version 2.2
Figma	SEIskolar – current design (Asph)
Repository	github.com/dreeyanzz/seiskolar (the source)

Built from the repository dreeyanzz/seiskolar at commit 8f5d06b (branch repo/even-screen-owners, 2026-10-26). Every picture is the repository's own drawing, unchanged. Design only: nothing here is implemented, and every person and number in the drawings is invented.

Contents

Front matter 4

About this deliverable 4
Team Asph and who owns what 6
Adrian Seth Tabotabo: what Adrian owns 8
Genril Theo Soroño: what Genril owns 9
Althea Maeve Kinaadman: what Althea owns 10
Zedric Camilotes: what Zedric owns 11
Dorothy Biatriz Capao: what Dorothy owns 12
How the design was made 13
Who uses SEIskolar, and the words it uses 15
Requirements traceability 16

Part A · Swimlanes 18

01 Sign in, and reach only your own screens 19
02 Set up a term: calendar, requirement names, checklist, deadline 21
03 File a Periodic Report 23
04 Check a filing: claim, verify or return, then resubmit 25
05 Release a batch, from cleared to released 27
06 Settle a school's tuition 29
07 Change a benefit, or propose a change 31
08 Set up a school and its people, and record a transfer 33
09 Set up the school portal: branding, grading, thresholds 35
10 Look up who did what to a record 37

Part B · Low-fidelity wireframes 39

Sign in 41
Account not ready 44
Nothing to show 45
Scholar: dashboard 46
Scholar: a requirement 47
Scholar: stipend and tuition 50
Coordinator: home 51
Coordinator: academic calendar 52
Coordinator: requirement names 53
Coordinator: tuition remittances 54
Coordinator: portal settings 56
Regional Office: home 57
Regional Office: checklist and deadline 58
Regional Office: queue 59
Regional Office: check a filing 60
Regional Office: release batches 63
Regional Office: tuition remittances 65
Regional Office: benefit proposals 67
Regional Office: schools 68
Regional Office: accounts 69
Regional Office: transfers 71
A record's history 72
Central Office: release batches 73
Central Office: a release batch 74
Central Office: benefits 76
Central Office: proposals 79
Central Office: thresholds 80
Administrator: DOST staff accounts 81
Administrator: regions 82

Part C · High-fidelity screens 83

Sign in 85
Account not ready 88
Nothing to show 89
Scholar: dashboard 90
Scholar: a requirement 91
Scholar: stipend and tuition 94
Coordinator: home 95
Coordinator: academic calendar 96
Coordinator: requirement names 97
Coordinator: tuition remittances 98
Coordinator: portal settings 100
Regional Office: home 101
Regional Office: checklist and deadline 102
Regional Office: queue 103
Regional Office: check a filing 104
Regional Office: release batches 107
Regional Office: tuition remittances 109
Regional Office: benefit proposals 111
Regional Office: schools 112
Regional Office: accounts 113
Regional Office: transfers 115
A record's history 116
Central Office: release batches 117
Central Office: a release batch 118
Central Office: benefits 120
Central Office: proposals 123
Central Office: thresholds 124
Administrator: DOST staff accounts 125
Administrator: regions 126

Part D · The design in Figma 127

The file, its pages and its owner labels 127
A section in Figma, and keeping it the same 128

Part E · Project plan: risk matrix, WBS and Gantt chart 129

Preliminary research and artifacts 131
Risks: identified and rated 134
The 5 × 5 risk matrix and the top three 136
Mitigation plans for the top three 138
Work breakdown structure 139
Gantt chart 142
Task dependency network 143
Still open 143

How this document was made 144

About this deliverable

SEIskolar is the software design of a system for DOST-SEI undergraduate scholars. Scholars file their per-term Periodic Report, the DOST Regional Office checks it, and everyone can see what is still outstanding, where a scholar's stipend is in the release process, and whether their tuition has been settled with their school. Nothing is implemented: the design is the deliverable. Each part is built only from the one before it, so every screen traces back to the steps it serves and the requirements behind them.

SRS 2.2
The baseline: 24 functional requirements, FR-IAM to FR-ADM, and the NFRs

→

Part A · Swimlanes
10 workflows. Each names the requirements it covers and numbers every step, S01.1 to S10.8

→

Part B · Wireframes
29 screens in grey boxes and real words. Each names the steps it serves

→

Part C · Screens
The same 29 screens finished, with the wireframe's name: a clickable prototype

→

Part D · Figma
A copy of A to C as editable layers, drawn from the repository by tools

What is in this document

Part	What it holds	How many
Front	The team and who owns what, how the design was made, its people and words, and the traceability from every requirement to its swimlane and screens	5 members
A	Swimlanes: who does what, in order, from the start of a workflow to its end, with a table of every step and the screens that serve it	10 workflows, 107 steps
B	Low-fidelity wireframes: every screen in every state, on a phone, a tablet and a desktop	29 screens, 42 states, 126 pictures
C	High-fidelity screens: the same, finished, in the school's colours inside its portal and SEIskolar's in the DOST console	29 screens, 42 states, 126 pictures
D	The design in Figma: the same 262 pictures as editable frames, labelled by owner	263 frames
E	Project plan: the risk matrix, the work breakdown structure and the Gantt chart, as updated in the repository	9 risks, 37 WBS rows

Where the design lives

- **Repository**, the source: github.com/dreeyanzz/seiskolar. The SRS is `01-srs/SRS.md`; each drawing is an HTML file with its pictures beside it. A drawing is changed here first.
- **Figma**, a copy: SEIskolar – current design (Asph). Each frame has the name of the picture it copies.
- **The clickable prototype**: open `04-high-fidelity/sign-in.html` in a browser; every button leads to the screen its swimlane shows next.

How to read the pages

- **Owner.** A page about one swimlane or screen carries its owner's colour down its left edge and their tag at the top, as the sections in Figma do: Adrian Seth Tabotabo, Genril Theo Soroño, Althea Maeve Kinaadman, Zedric Camilotes, Dorothy Biatriz Capao.
- **Step numbers.** `S04.3` is step 3 of swimlane 04. A screen's "Serves" line names the steps it serves; FR-… and NFR-… are the SRS's requirement IDs. Both are links in this PDF.
- **States.** A screen that changes, such as a requirement before and after it is returned, has one page per state.
- **Devices.** Every screen is drawn for a phone 360 px wide, a tablet 768 px and a desktop 1440 px, left to right as in Figma, at one scale where the page allows. Nothing scrolls sideways on any of them.
- **Notes.** The dashed NOTE boxes in the wireframes are for reviewers, not part of the screen. Each page repeats them in text above the pictures.
- **Assumed.** What the SRS does not settle is labelled ASSUMED. There is one such gap: which Regional Office records a transfer between regions (SRS open question 26), step S08.13 and the Transfers screen.
- **Invented people.** Every person is invented, with `@example.test` addresses, and every school but CIT-U, the pilot school. Amounts and dates are sample values, not DOST's rates, and CIT-U's crest is a stand-in, not its seal (SRS §2.3).

Team Asph and who owns what

Every swimlane and every screen has one owner, who presents it and must be able to explain every part of it. The design is divided evenly: each member owns two swimlanes and five or six screens, and a wireframe and its high-fidelity screen keep one owner.

Member	Role	Colour	Swimlanes	Screens, as wireframe and finished screen	Pictures	Page
Adrian Seth Tabotabo @dreeyanzz	Project Manager; reviews and merges	purple	05 Release a batch, from cleared to released 07 Change a benefit, or propose a change	Regional Office: release batches Regional Office: benefit proposals Central Office: release batches Central Office: a release batch Central Office: benefits Central Office: proposals	62	p. 8
Genril Theo Soroño @gnthril	Member	blue	01 Sign in, and reach only your own screens 03 File a Periodic Report	Sign in Account not ready Nothing to show Scholar: dashboard Scholar: a requirement Administrator: DOST staff accounts	62	p. 9
Althea Maeve Kinaadman @Tiamporado	Member	pink	06 Settle a school's tuition 09 Set up the school portal: branding, grading, thresholds	Scholar: stipend and tuition Coordinator: tuition remittances Coordinator: portal settings Regional Office: tuition remittances Central Office: thresholds	44	p. 10
Zedric Camilotes @zedric-git	Member	orange	04 Check a filing: claim, verify or return, then resubmit 10 Look up who did what to a record	Coordinator: home Regional Office: home Regional Office: checklist and deadline Regional Office: queue Regional Office: check a filing A record's history	50	p. 11
Dorothy Biatriz Capao @dbeenutsz	Member	green	02 Set up a term: calendar, requirement names, checklist, deadline 08 Set up a school and its people, and record a transfer	Coordinator: academic calendar Coordinator: requirement names Regional Office: schools Regional Office: accounts Regional Office: transfers Administrator: regions	44	p. 12

How the work was divided

On 7 October 2026, when the ten workflows were listed, each member was given two swimlanes (pull request #1). Each screen's owner is the owner of the swimlane it mostly serves, with three exceptions. On 26 October 2026 Adrian divided the screens evenly, so that every member owns five or six, by moving three:

- **Scholar: stipend and tuition** to Althea Maeve Kinaadman: it serves S06.12, in swimlane 06, Settle a school's tuition, which Althea owns.
- **Regional Office: checklist and deadline** to Zedric Camilotes: the same Regional Office staff use the queue and filing-check screens Zedric owns.
- **Administrator: DOST staff accounts** to Genril Theo Soroño: accounts decide who can sign in, swimlane 01, which Genril owns.

Where owners are written down

The owner of each item is in its folder's index in the repository (`02-swimlanes/README.md`, `03-low-fidelity/README.md`, `04-high-fidelity/README.md`), and the Figma file is labelled from those indexes: every section is tinted in its owner's colour and tagged with their name (Part D).

The even division is on branch `repo/even-screen-owners`, commit 8f5d06b, which the Figma labels also follow. Counts on this page are counted from the indexes, not typed.

AT

Adrian Seth Tabotabo

@dreeyanzz · Project Manager; reviews and merges every change · purple in Figma · owns 2 swimlanes and 6 screens, 62 pictures in all

Item	What it covers	Size	Pages
Swimlane 05: Release a batch, from cleared to released	Covers FR-REL-001, FR-REL-002, FR-REL-003	13 steps	**p. 27** · steps **p. 28**
Swimlane 07: Change a benefit, or propose a change	Covers FR-BEN-001, FR-BEN-002, FR-BEN-003	9 steps	**p. 31** · steps **p. 32**
Regional Office: release batches regional-release-batch.html · 2 states: draft, returned	Serves S05.1 to S05.5, S05.8, S05.13 · FR-REL-001	12 pictures	wireframe **p. 63** · screen **p. 107**
Regional Office: benefit proposals regional-benefit-proposal.html	Serves S07.1, S07.2, S07.5 · FR-BEN-002	6 pictures	wireframe **p. 67** · screen **p. 111**
Central Office: release batches central-batches.html	Serves S05.6 · FR-REL-002	6 pictures	wireframe **p. 73** · screen **p. 117**
Central Office: a release batch central-batch.html · 2 states: review, approved	Serves S05.6 to S05.11 · FR-REL-002	12 pictures	wireframe **p. 74** · screen **p. 118**
Central Office: benefits central-benefits.html · 3 states: benefits, rules, scholar	Serves S07.7, S07.8 · FR-BEN-001, FR-BEN-002	18 pictures	wireframe **p. 76** · screen **p. 120**
Central Office: proposals central-proposals.html	Serves S07.3, S07.4, S07.6 · FR-BEN-002	6 pictures	wireframe **p. 79** · screen **p. 123**

Adrian's work at a glance

Each swimlane, and each screen as finished on a desktop in its first state. In this PDF, each picture opens its page.


Swimlane 05


Swimlane 07


Regional Office: release batches


Regional Office: benefit proposals


Central Office: release batches


Central Office: a release batch


Central Office: benefits


Central Office: proposals

Requirements Adrian's work covers

FR-REL-001 Release Batch Assembly · FR-REL-002 Central Office Decision · FR-REL-003 Scholar Release Status · FR-BEN-001 Benefit List and Rules · FR-BEN-002 Per-Scholar Changes and Proposals · FR-BEN-003 Ceilings on the Scholar's Screen

Genril Theo Soroño

@gnthril · Member · blue in Figma · owns 2 swimlanes and 6 screens, 62 pictures in all

Item	What it covers	Size	Pages
Swimlane 01: Sign in, and reach only your own screens	Covers FR-IAM-001, FR-IAM-002, FR-IAM-003	12 steps	**p. 19** · steps **p. 20**
Swimlane 03: File a Periodic Report	Covers FR-SCH-001, FR-SCH-002, FR-SCH-003, FR-SCH-004	10 steps	**p. 23** · steps **p. 24**
Sign in sign-in.html · 3 states: school, console, wrong password	Serves S01.1 to S01.4, S08.8 · FR-IAM-001, FR-IAM-002	18 pictures	wireframe **p. 41** · screen **p. 85**
Account not ready no-access.html	Serves S01.5, S01.6 · FR-IAM-001	6 pictures	wireframe **p. 44** · screen **p. 88**
Nothing to show nothing-found.html	Serves S01.9, S01.10, S01.12 · FR-IAM-003	6 pictures	wireframe **p. 45** · screen **p. 89**
Scholar: dashboard scholar-dashboard.html	Serves S01.8, S02.8 to S02.11, S03.1 to S03.3, S08.12 · FR-SCH-001	6 pictures	wireframe **p. 46** · screen **p. 90**
Scholar: a requirement scholar-requirement.html · 3 states: not started, returned, verified	Serves S01.11, S03.3 to S03.10, S04.10, S04.11, S09.6 · FR-SCH-002, FR-SCH-003, FR-SCH-004, FR-ADM-003	18 pictures	wireframe **p. 47** · screen **p. 91**
Administrator: DOST staff accounts admin-staff-accounts.html	Serves S08.2, S08.3 · FR-ADM-001	6 pictures	wireframe **p. 81** · screen **p. 125**

Genril's work at a glance

Each swimlane, and each screen as finished on a desktop in its first state. In this PDF, each picture opens its page.


Swimlane 01


Swimlane 03


Sign in


Account not ready


Nothing to show


Scholar: dashboard


Scholar: a requirement


Administrator: DOST staff accounts

Requirements Genril's work covers

FR-IAM-001 Cryptographic Session Token Scope Injection · FR-IAM-002 Multi-Tenant Interface Host Resolution · FR-IAM-003 Cross-Tenant Row Denial · FR-SCH-001 Requirement Slot Tracking & Deadline Display · FR-SCH-002 Direct-to-Storage Presigned Upload Dispatch · FR-SCH-003 Tabular Grade-Line Entry & Weighted Average Calculation · FR-SCH-004 Atomic Submission Record Finalization · FR-ADM-003 School Portal Settings · FR-ADM-001 School and Account Provisioning

AK

Althea Maeve Kinaadman

@Tiamporado · Member · pink in Figma · owns 2 swimlanes and 5 screens, 44 pictures in all

Item	What it covers	Size	Pages
Swimlane 06: Settle a school's tuition	Covers FR-TUI-001, FR-TUI-002, FR-TUI-003	13 steps	**p. 29** · steps **p. 30**
Swimlane 09: Set up the school portal: branding, grading, thresholds	Covers FR-ADM-003	6 steps	**p. 35** · steps **p. 36**
Scholar: stipend and tuition scholar-status.html	Serves S05.12, S05.13, S06.12, S07.9 · FR-REL-003, FR-TUI-003, FR-BEN-003	6 pictures	wireframe **p. 50** · screen **p. 94**
Coordinator: tuition remittances coordinator-remittances.html · 2 states: check, crediting	Serves S06.3 to S06.11, S06.13 · FR-TUI-002	12 pictures	wireframe **p. 54** · screen **p. 98**
Coordinator: portal settings coordinator-portal-settings.html	Serves S09.1 to S09.3 · FR-ADM-003	6 pictures	wireframe **p. 56** · screen **p. 100**
Regional Office: tuition remittances regional-remittance.html · 2 states: record, disputed	Serves S06.1, S06.2, S06.5, S06.13 · FR-TUI-001	12 pictures	wireframe **p. 65** · screen **p. 109**
Central Office: thresholds central-thresholds.html	Serves S09.4, S09.5 · FR-ADM-003	6 pictures	wireframe **p. 80** · screen **p. 124**

Althea's work at a glance

Each swimlane, and each screen as finished on a desktop in its first state. In this PDF, each picture opens its page.



Swimlane 06

Swimlane 09



Scholar: stipend and tuition



Coordinator: tuition remittances



Coordinator: portal settings



Regional Office: tuition remittances



Central Office: thresholds

Requirements Althea's work covers

FR-TUI-001 Tuition Remittance · FR-TUI-002 Coordinator Confirmation and Crediting · FR-TUI-003 Scholar Tuition Card · FR-ADM-003 School Portal Settings · FR-REL-003 Scholar Release Status · FR-BEN-003 Ceilings on the Scholar's Screen

ZC

Zedric Camilotes

@zedric-git · Member · orange in Figma · owns 2 swimlanes and 6 screens, 50 pictures in all

Item	What it covers	Size	Pages
Swimlane 04: Check a filing: claim, verify or return, then resubmit	Covers FR-CHK-001, FR-CHK-002, FR-CHK-003, FR-CHK-004, FR-MON-001	12 steps	**p. 25** · steps **p. 26**
Swimlane 10: Look up who did what to a record	Covers NFR-SEC-003; §4.1 “Inspect Immutable Audit Logs”	8 steps	**p. 37** · steps **p. 38**
Coordinator: home coordinator-home.html	Serves S04.12 · FR-MON-001	6 pictures	wireframe **p. 51** · screen **p. 95**
Regional Office: home regional-home.html	Serves S04.1 · FR-MON-001	6 pictures	wireframe **p. 57** · screen **p. 101**
Regional Office: checklist and deadline regional-term-setup.html	Serves S02.5 to S02.7 · SRS §1.3; FR-SCH-001	6 pictures	wireframe **p. 58** · screen **p. 102**
Regional Office: queue regional-queue.html	Serves S04.2, S04.3 · FR-CHK-001, FR-CHK-002	6 pictures	wireframe **p. 59** · screen **p. 103**
Regional Office: check a filing regional-review.html · 3 states: unclaimed, claimed, returning	Serves S04.3 to S04.9 · FR-CHK-002, FR-CHK-003, FR-CHK-004	18 pictures	wireframe **p. 60** · screen **p. 104**
A record's history record-history.html	Serves S10.5 to S10.8 · NFR-SEC-003; SRS §4.1 “Inspect Immutable Audit Logs”	6 pictures	wireframe **p. 72** · screen **p. 116**

Zedric's work at a glance

Each swimlane, and each screen as finished on a desktop in its first state. In this PDF, each picture opens its page.



Swimlane 04



Swimlane 10



Coordinator: home



Regional Office: home



Regional Office: checklist and deadline



Regional Office: queue



Regional Office: check a filing



A record's history

Requirements Zedric's work covers

FR-CHK-001 Evaluator Work Queue & School Filter · FR-CHK-002 Concurrency Control & Submission Claiming · FR-CHK-003 Split-Screen Verification & Grade Comparison · FR-CHK-004 Standardized Return & Approval Dispatch · FR-MON-001 Campus Batch Progress Burn-Down Aggregation · NFR-SEC-003 Immutable, Record-Scoped Audit Logging (ADR-0012) · FR-SCH-001 Requirement Slot Tracking & Deadline Display

DC

Dorothy Biatriz Capao

@dbeenutsz · Member · green in Figma · owns 2 swimlanes and 6 screens, 44 pictures in all

Item	What it covers	Size	Pages
Swimlane 02: Set up a term: calendar, requirement names, checklist, deadline	Covers §1.3 (who sets what); §4.1 “Configure Campus Terms” and “Customize Requirement Labels”; the deadline FR-SCH-001 shows	11 steps	**p. 21** · steps **p. 22**
Swimlane 08: Set up a school and its people, and record a transfer	Covers FR-ADM-001, FR-ADM-002; §4.1 “Maintain Reference Data”	13 steps	**p. 33** · steps **p. 34**
Coordinator: academic calendar coordinator-terms.html	Serves S02.1, S02.2, S02.4 · SRS §1.3; §4.1 “Configure Campus Terms”	6 pictures	wireframe **p. 52** · screen **p. 96**
Coordinator: requirement names coordinator-requirement-names.html	Serves S02.3, S02.4 · SRS §4.1 “Customize Requirement Labels”	6 pictures	wireframe **p. 53** · screen **p. 97**
Regional Office: schools regional-schools.html	Serves S08.4 · FR-ADM-001	6 pictures	wireframe **p. 68** · screen **p. 112**
Regional Office: accounts regional-accounts.html · 2 states: scholars, coordinators	Serves S08.5 to S08.7 · FR-ADM-001	12 pictures	wireframe **p. 69** · screen **p. 113**
Regional Office: transfers regional-transfer.html	Serves S08.9 to S08.11, S08.13 · FR-ADM-002	6 pictures	wireframe **p. 71** · screen **p. 115**
Administrator: regions admin-regions.html	Serves S08.1 · SRS §4.1 “Maintain Reference Data”	6 pictures	wireframe **p. 82** · screen **p. 126**

Dorothy's work at a glance

Each swimlane, and each screen as finished on a desktop in its first state. In this PDF, each picture opens its page.


Swimlane 02


Swimlane 08


Coordinator: academic calendar


Coordinator: requirement names


Regional Office: schools


Regional Office: accounts


Regional Office: transfers


Administrator: regions

Requirements Dorothy's work covers

FR-SCH-001 Requirement Slot Tracking & Deadline Display · FR-ADM-001 School and Account Provisioning · FR-ADM-002 Transfers

How the design was made

From the dates in both repositories' history, the SRS's revision history, and the project plan (Part E). Dates are in Philippine time.

When	What happened	Where it is recorded
17 Aug 2026	The project starts, in the Software Design course at CIT-U.	WBS, plan
28 and 30 Aug	A live audit of the CIT-U DOST-VII Google Drive folder finds five weaknesses, W1 to W5: the link is the credential, inverted custody, no status, pull verification, no structure.	SRS §1.1; the concept paper, §2.5
29 Aug to 25 Sep	The concept paper (to revision 0.4), the architecture, the ADRs, the subsystem designs and the brand guidelines. A working prototype is built to test the design (29 Aug to 24 Sep), then removed on 25 Sep.	Archived repository; tag `prototype-final`
5, 14 and 25 Sep	SRS 1.0, reverse-engineered from the prototype; 2.0, scope realigned to the release pipeline and tuition settlement; 2.1, Central Office and administrator roles, release, tuition and benefits.	The SRS's revision history
11 Sep	The first risk matrix, WBS and Gantt chart are submitted to the course.	Archive (.docx); Part E
25 Sep to 5 Oct	The first swimlanes and wireframes are drawn in Figma, in the file “Asph – SEIskolar”; on 5 Oct a first high-fidelity prototype of the scholar portal. Both are later superseded.	Archive, `docs/FIGMA.md`
7 Oct	Rebuild: a new, design-only repository is started from the SRS (version 2.2). The ten workflows are listed with an owner each, and the swimlanes get their shared look.	Pull requests #1 and #2
12 Oct	The ten swimlanes (107 steps), the 29 wireframes and the 29 high-fidelity screens are merged; every file is written in full for the next reader; the risk matrix, WBS and Gantt chart are updated for the new repository.	Pull requests #3 to #9
26 Oct	The course needs the design in Figma as editable layers (Adrian's decision). The tools that copy it are merged, and every drawing is imported into the new file “SEIskolar – current design (Asph)”. Faults the first import showed are fixed and the frames redrawn. The screens are divided evenly between the five members, and the Figma file is labelled by owner.	Pull requests #10 and #11; branches awaiting review
2 to 14 Nov	Planned: the high-fidelity screens' repeated parts become Figma components.	WBS 4.10, proposed
15 to 27 Nov	Planned: the cross-tenant denial test matrix, the end-to-end journeys and the traceability check.	WBS 5.2 to 5.4
25 Nov to 10 Dec	Planned: review and polish, the prototype walkthrough, slides and rehearsals, and the final presentation and design defence on 10 December.	WBS 6.1 to 6.4

Pull requests in this repository

Every change to `main` is a pull request with one approval, squash-merged by Adrian (README, “How work moves”).

#	Merged	What it did	
1	12 Oct 00:55	List the ten workflows the SRS needs, with owners	Opened 7 Oct
2	12 Oct 00:55	Add the shared look of the swimlanes, and a starting template	Opened 7 Oct
3	12 Oct 01:00	Draw the ten workflows: 107 numbered steps	
4	12 Oct 01:05	Draw every screen as a wireframe for phone, tablet and desktop: 126 pictures	
5	12 Oct 01:11	Finish every screen as a clickable prototype: 126 pictures	

#	Merged	What it did	
6	12 Oct 01:42	Ask every agent to write everything in full	
7	12 Oct 01:48	Give every rule its reason and every screen its context	
8	12 Oct 01:49	Say that a pull request body may not even quote the comment marker	
9	12 Oct 02:10	Bring back the risk matrix and Gantt chart, updated for this repository	
10	26 Oct 10:50	Copy the design into Figma as editable layers	
11	Open	Label the Figma file by owner, from the indexes	Opened 26 Oct

Who uses SEIskolar, and the words it uses

The swimlanes' lanes are the people the SRS names (§1.3), plus a SEIskolar lane for what the system does by itself. Every label uses the SRS's words.

Who	Who they are	What they do in SEIskolar	Has a lane in swimlanes
Scholar	A DOST-SEI undergraduate scholar at a school.	Files the term's Periodic Report: the Study Load (Registration Form) and the Certified Report of Grades with its grade lines typed in. Follows each requirement's status, where their stipend is in the release process, their tuition and their benefits' ceilings. Sees only their own records.	01, 02, 03, 04, 05, 06, 07, 08, 09
School Coordinator	A university employee, not DOST staff. A "coordinator" is always the school's.	Sets up the school's portal (logo, colours, grading scale and passing grade), its academic calendar and its names for DOST's requirements; confirms DOST's tuition remittances and credits scholars, or disputes a remittance.	01, 02, 04, 06, 08, 09
DOST Regional Office	The supervising office, DOST-VII for CIT-U. The SRS also calls its staff the checker.	Creates schools and accounts and records transfers; sets each term's checklist and deadline; checks filings; builds and sends release batches; records tuition remittances; proposes benefit changes.	01, 02, 04, 05, 06, 07, 08, 10
DOST Central Office	DOST-SEI in Bicutan, Manila: several people, each signing in.	Approves or returns release batches, removes a scholar with a reason, and records the release; manages benefits and reviews proposals; sets each school's Agreement §VII.A threshold. Reads every region.	01, 05, 07, 09, 10
System administrator	The system's maintainer.	Keeps the reference data and the DOST staff accounts. Makes no program decision.	08

Words that are easy to mix up

- **Cleared** means every mandatory document for the term is verified. It is not **released**, which is Central Office releasing the money. SEIskolar records each step but never moves money, and cannot see it reach the account.
- A **release batch** is the Regional Office's list of cleared scholars, sent to Central Office. It is not the **award batch**, the year a scholar was awarded.
- A **remittance** is DOST's payment of tuition to a school, with its proof and its list of scholars; the coordinator **credits** each scholar.

A filing's states, and why one comes back

Every requirement a scholar files is in one of five states: `not_started`, `submitted`, `under_review` (claimed by one checker), `verified` (final: no one can change it) and `returned`.

A returned filing carries one of the eight reasons in FR-CHK-004: illegible, wrong document, incomplete, wrong term, not certified, details don't match, superseded, or other, which needs remarks of 10 characters or more.

Requirements traceability

Every one of the SRS's 24 functional requirements is covered by a swimlane (24 of 24), and 102 of the 107 steps are served by a screen. The other 5 need none: S01.7, S10.2, S10.3, S10.4 are done by SEIskolar alone, and S10.1, changing a record, happens on every screen that saves something.

Requirement	Its name in the SRS	Swimlane	Screens that show it
FR-IAM-001	Cryptographic Session Token Scope Injection	01 Sign in, and reach only your own screens	Sign in, Account not ready
FR-IAM-002	Multi-Tenant Interface Host Resolution	01 Sign in, and reach only your own screens	Sign in
FR-IAM-003	Cross-Tenant Row Denial	01 Sign in, and reach only your own screens	Nothing to show
FR-SCH-001	Requirement Slot Tracking & Deadline Display	02 Set up a term: calendar, requirement names, checklist, deadline 03 File a Periodic Report	Scholar: dashboard, Regional Office: checklist and deadline
FR-SCH-002	Direct-to-Storage Presigned Upload Dispatch	03 File a Periodic Report	Scholar: a requirement
FR-SCH-003	Tabular Grade-Line Entry & Weighted Average Calculation	03 File a Periodic Report	Scholar: a requirement
FR-SCH-004	Atomic Submission Record Finalization	03 File a Periodic Report	Scholar: a requirement
FR-CHK-001	Evaluator Work Queue & School Filter	04 Check a filing: claim, verify or return, then resubmit	Regional Office: queue
FR-CHK-002	Concurrency Control & Submission Claiming	04 Check a filing: claim, verify or return, then resubmit	Regional Office: queue, Regional Office: check a filing
FR-CHK-003	Split-Screen Verification & Grade Comparison	04 Check a filing: claim, verify or return, then resubmit	Regional Office: check a filing
FR-CHK-004	Standardized Return & Approval Dispatch	04 Check a filing: claim, verify or return, then resubmit	Regional Office: check a filing
FR-MON-001	Campus Batch Progress Burn-Down Aggregation	04 Check a filing: claim, verify or return, then resubmit	Coordinator: home, Regional Office: home
FR-REL-001	Release Batch Assembly	05 Release a batch, from cleared to released	Regional Office: release batches
FR-REL-002	Central Office Decision	05 Release a batch, from cleared to released	Central Office: release batches, Central Office: a release batch
FR-REL-003	Scholar Release Status	05 Release a batch, from cleared to released	Scholar: stipend and tuition

Requirement	Its name in the SRS	Swimlane	Screens that show it
FR-TUI-001	Tuition Remittance	06 Settle a school's tuition	Regional Office: tuition remittances
FR-TUI-002	Coordinator Confirmation and Crediting	06 Settle a school's tuition	Coordinator: tuition remittances
FR-TUI-003	Scholar Tuition Card	06 Settle a school's tuition	Scholar: stipend and tuition
FR-BEN-001	Benefit List and Rules	07 Change a benefit, or propose a change	Central Office: benefits
FR-BEN-002	Per-Scholar Changes and Proposals	07 Change a benefit, or propose a change	Regional Office: benefit proposals, Central Office: benefits, Central Office: proposals
FR-BEN-003	Ceilings on the Scholar's Screen	07 Change a benefit, or propose a change	Scholar: stipend and tuition
FR-ADM-001	School and Account Provisioning	08 Set up a school and its people, and record a transfer	Regional Office: schools, Regional Office: accounts, Administrator: DOST staff accounts
FR-ADM-002	Transfers	08 Set up a school and its people, and record a transfer	Regional Office: transfers
FR-ADM-003	School Portal Settings	09 Set up the school portal: branding, grading, thresholds	Scholar: a requirement, Coordinator: portal settings, Central Office: thresholds
NFR-SEC-003	Immutable, Record-Scoped Audit Logging (ADR-0012)	10 Look up who did what to a record	A record's history
NFR-ACC-001	Accessible, Mobile-First Interface	Every swimlane's screens	Every screen: drawn for a phone 360 px wide, with no sideways scrolling, and finished to WCAG 2.1 AA (Part C)
§4.1 "Configure Campus Terms"	SRS §4.1 use case	02 Set up a term: calendar, requirement names, checklist, deadline	Coordinator: academic calendar
§4.1 "Customize Requirement Labels"	SRS §4.1 use case	02 Set up a term: calendar, requirement names, checklist, deadline	Coordinator: requirement names
§4.1 "Maintain Reference Data"	SRS §4.1 use case	08 Set up a school and its people, and record a transfer	Administrator: regions
§4.1 "Inspect Immutable Audit Logs"	SRS §4.1 use case	10 Look up who did what to a record	A record's history
§1.3	Stakeholders: who sets each term's calendar, checklist and deadline	02 Set up a term: calendar, requirement names, checklist, deadline	Coordinator: academic calendar, Regional Office: checklist and deadline

A Swimlanes

One swimlane per workflow in the SRS: who does what, in order, from the moment the workflow starts until it ends. 10 workflows, 107 numbered steps.

Each swimlane names the SRS requirements it covers, and one line says where it starts and where it ends. Its lanes are the people the SRS names, plus a SEIskolar lane for what the system does or works out by itself. Every step and decision is numbered, `S04.3`, so a wireframe can name the steps it serves; every branch of a decision reaches an end or rejoins the flow. Each swimlane has two pages: the drawing, then a table of its steps with the screens that serve each one.

#	Workflow	Covers	Steps	Owner	Pages
01	Sign in, and reach only your own screens	FR-IAM-001, FR-IAM-002, FR-IAM-003	12	Genril Theo Soroño	**p. 19, 20**
02	Set up a term: calendar, requirement names, checklist, deadline	§1.3 (who sets what); §4.1 “Configure Campus Terms” and “Customize Requirement Labels”; the deadline FR-SCH-001 shows	11	Dorothy Biatriz Capao	**p. 21, 22**
03	File a Periodic Report	FR-SCH-001, FR-SCH-002, FR-SCH-003, FR-SCH-004	10	Genril Theo Soroño	**p. 23, 24**
04	Check a filing: claim, verify or return, then resubmit	FR-CHK-001, FR-CHK-002, FR-CHK-003, FR-CHK-004, FR-MON-001	12	Zedric Camilotes	**p. 25, 26**
05	Release a batch, from cleared to released	FR-REL-001, FR-REL-002, FR-REL-003	13	Adrian Seth Tabotabo	**p. 27, 28**
06	Settle a school's tuition	FR-TUI-001, FR-TUI-002, FR-TUI-003	13	Althea Maeve Kinaadman	**p. 29, 30**
07	Change a benefit, or propose a change	FR-BEN-001, FR-BEN-002, FR-BEN-003	9	Adrian Seth Tabotabo	**p. 31, 32**
08	Set up a school and its people, and record a transfer	FR-ADM-001, FR-ADM-002; §4.1 “Maintain Reference Data”	13	Dorothy Biatriz Capao	**p. 33, 34**
09	Set up the school portal: branding, grading, thresholds	FR-ADM-003	6	Althea Maeve Kinaadman	**p. 35, 36**
10	Look up who did what to a record	NFR-SEC-003; §4.1 “Inspect Immutable Audit Logs”	8	Zedric Camilotes	**p. 37, 38**

The legend at the foot of every drawing: a filled dot starts a path and a ringed dot ends one; a plain box is a step someone takes, a dashed box something SEIskolar does by itself, a diamond a decision, a grey box what SEIskolar saves, and a blue-edged box the status at the end; a dashed red arrow goes back to fix something.

SWIMLANE 01 OF 10

Owner: Genril Theo Soroño (@gnthril)

Sign in, and reach only your own screens

Covers FR-IAM-001, FR-IAM-002, FR-IAM-003 · 12 steps, S01.1 to S01.12 · Lanes: Anyone signing in: a scholar, a coordinator or DOST staff, SEIskolar

Starts when someone opens SEIskolar's address. Ends when they see their own records, or nothing.

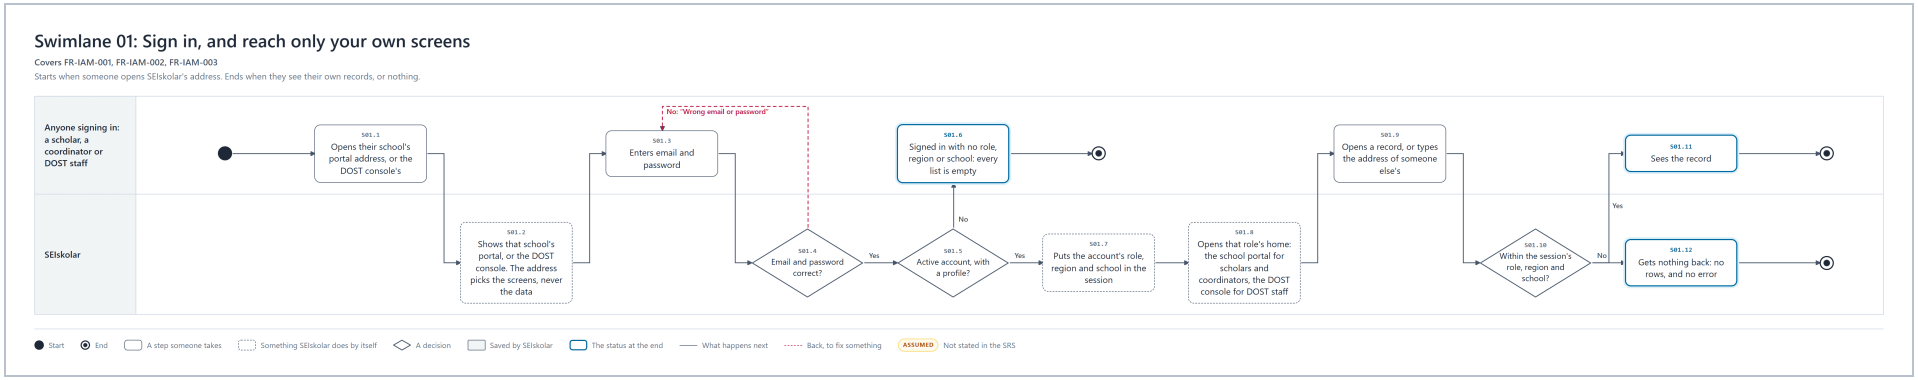

Repository: `02-swimlanes/01-sign-in.html` and its picture `01-sign-in.png` · Figma: page 02 Swimlanes, section 01-sign-in.html · Steps on page 20

SWIMLANE 01 · THE STEPS

Owner: Genril Theo Soroño (@gnthril)

Sign in, and reach only your own screens

Step	Who	Kind	What happens	Goes to	Served by (wireframe page)
S01.1	Anyone signing in: a scholar, a coordinator or DOST staff	Step	Opens their school's portal address, or the DOST console's	→ S01.2	Sign in **41**
S01.2	SEIskolar	By itself	Shows that school's portal, or the DOST console. The address picks the screens, never the data	→ S01.3	Sign in **41**
S01.3	Anyone signing in: a scholar, a coordinator or DOST staff	Step	Enters email and password	→ S01.4	Sign in **41**
S01.4	SEIskolar	Decision	Email and password correct?	No: "Wrong email or password" → S01.3 Yes → S01.5	Sign in **41**
S01.5	SEIskolar	Decision	Active account, with a profile?	No → S01.6 Yes → S01.7	Account not ready **44**
S01.6	Anyone signing in: a scholar, a coordinator or DOST staff	Status at the end	Signed in with no role, region or school: every list is empty	→ End	Account not ready **44**
S01.7	SEIskolar	By itself	Puts the account's role, region and school in the session	→ S01.8	None: SEIskolar does this by itself
S01.8	SEIskolar	By itself	Opens that role's home: the school portal for scholars and coordinators, the DOST console for DOST staff	→ S01.9	Scholar: dashboard **46**
S01.9	Anyone signing in: a scholar, a coordinator or DOST staff	Step	Opens a record, or types the address of someone else's	→ S01.10	Nothing to show **45**
S01.10	SEIskolar	Decision	Within the session's role, region and school?	Yes → S01.11 No → S01.12	Nothing to show **45**
S01.11	Anyone signing in: a scholar, a coordinator or DOST staff	Status at the end	Sees the record	→ End	Scholar: a requirement **47**
S01.12	SEIskolar	Status at the end	Gets nothing back: no rows, and no error	→ End	Nothing to show **45**

SWIMLANE 02 OF 10

Owner: Dorothy Biatriz Capao (@dbeenutsz)

Set up a term: calendar, requirement names, checklist, deadline

Covers §1.3 (who sets what); §4.1 “Configure Campus Terms” and “Customize Requirement Labels”; the deadline FR-SCH-001 shows · 11 steps, S02.1 to S02.11 · Lanes: School Coordinator, SEIskolar, DOST Regional Office, Scholar

Starts when a school's coordinator adds a term. Ends when the school's scholars see the term's checklist.

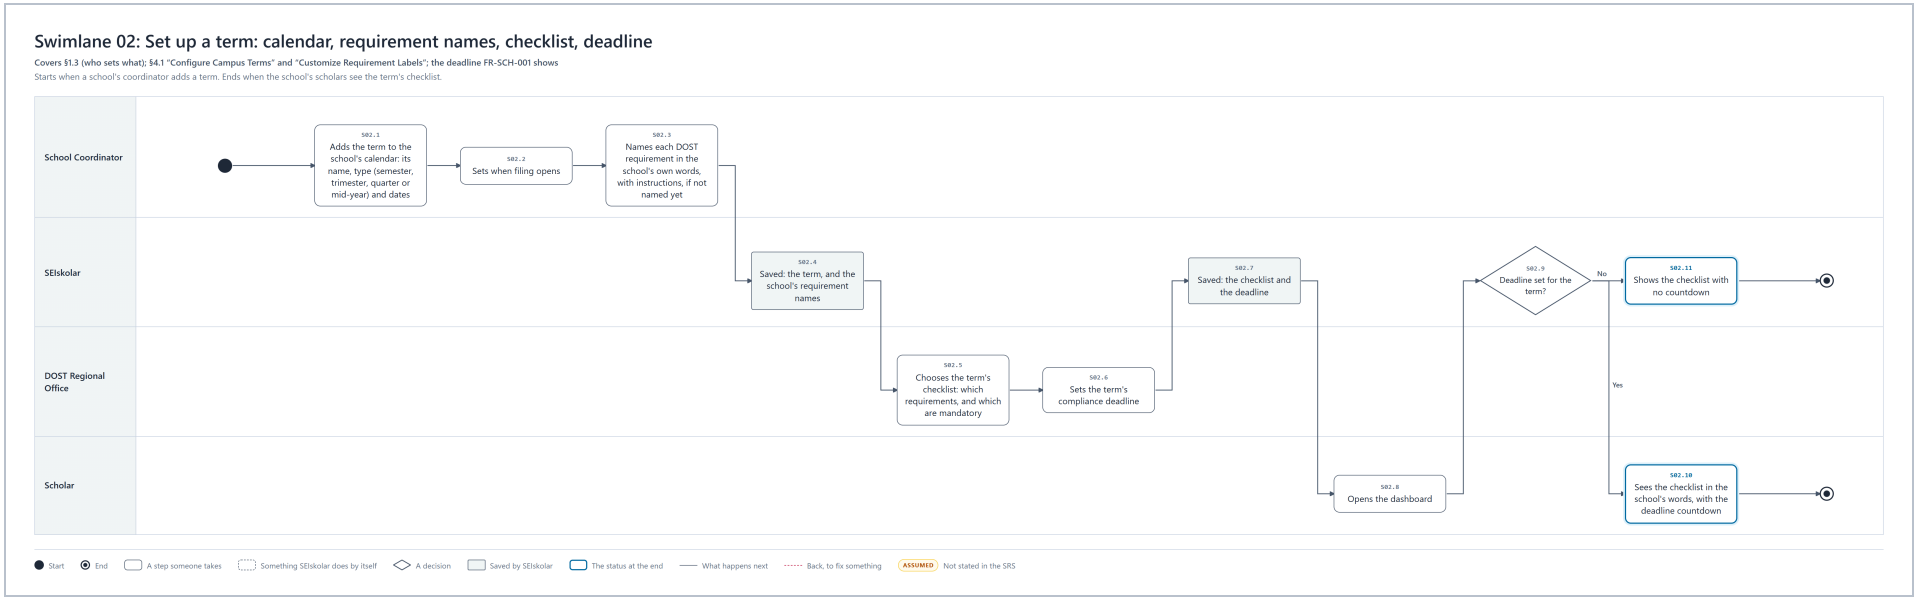

Repository: `02-swimlanes/02-set-up-a-term.html` and its picture `02-set-up-a-term.png` · Figma: page 02 Swimlanes, section 02-set-up-a-term.html · Steps on page 22

SWIMLANE 02 · THE STEPS

Owner: Dorothy Biatriz Capao (@dbeenutsz)

Set up a term: calendar, requirement names, checklist, deadline

Step	Who	Kind	What happens	Goes to	Served by (wireframe page)
S02.1	School Coordinator	Step	Adds the term to the school's calendar: its name, type (semester, trimester, quarter or mid-year) and dates	→ S02.2	Coordinator: academic calendar **52**
S02.2	School Coordinator	Step	Sets when filing opens	→ S02.3	Coordinator: academic calendar **52**
S02.3	School Coordinator	Step	Names each DOST requirement in the school's own words, with instructions, if not named yet	→ S02.4	Coordinator: requirement names **53**
S02.4	SEIskolar	Saved	Saved: the term, and the school's requirement names	→ S02.5	Coordinator: academic calendar **52** Coordinator: requirement names **53**
S02.5	DOST Regional Office	Step	Chooses the term's checklist: which requirements, and which are mandatory	→ S02.6	Regional Office: checklist and deadline **58**
S02.6	DOST Regional Office	Step	Sets the term's compliance deadline	→ S02.7	Regional Office: checklist and deadline **58**
S02.7	SEIskolar	Saved	Saved: the checklist and the deadline	→ S02.8	Regional Office: checklist and deadline **58**
S02.8	Scholar	Step	Opens the dashboard	→ S02.9	Scholar: dashboard **46**
S02.9	SEIskolar	Decision	Deadline set for the term?	Yes → S02.10 No → S02.11	Scholar: dashboard **46**
S02.10	Scholar	Status at the end	Sees the checklist in the school's words, with the deadline countdown	→ End	Scholar: dashboard **46**
S02.11	SEIskolar	Status at the end	Shows the checklist with no countdown	→ End	Scholar: dashboard **46**

SWIMLANE 03 OF 10

File a Periodic Report

Owner: Genril Theo Soroño (@gnthril)

Covers FR-SCH-001, FR-SCH-002, FR-SCH-003, FR-SCH-004 · 10 steps, S03.1 to S03.10 · Lanes: Scholar, SEIskolar

Starts when a scholar opens their dashboard. Ends when their filing is saved as submitted.

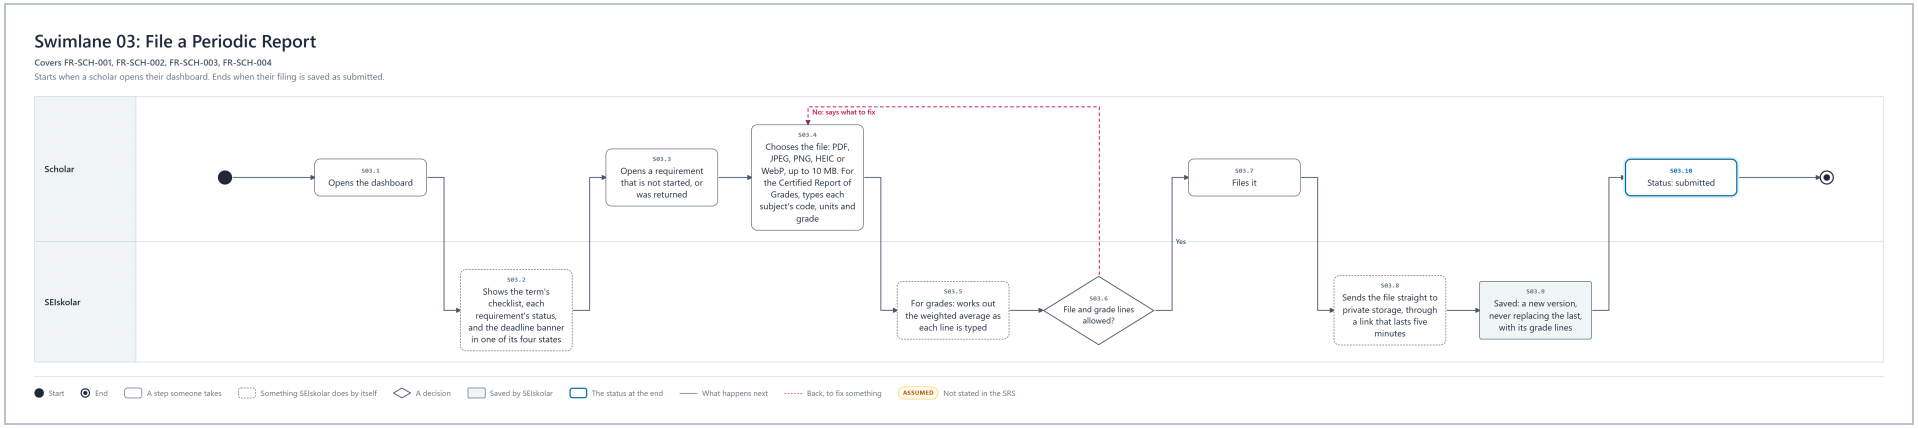

Repository: `02-swimlanes/03-file-a-periodic-report.html` and its picture `03-file-a-periodic-report.png` · Figma: page 02 Swimlanes, section 03-file-a-periodic-report.html · Steps on page **24**

SWIMLANE 03 · THE STEPS

File a Periodic Report

Owner: Genril Theo Soroño (@gnthril)

Step	Who	Kind	What happens	Goes to	Served by (wireframe page)
S03.1	Scholar	Step	Opens the dashboard	→ S03.2	Scholar: dashboard **46**
S03.2	SEIskolar	By itself	Shows the term's checklist, each requirement's status, and the deadline banner in one of its four states	→ S03.3	Scholar: dashboard **46**
S03.3	Scholar	Step	Opens a requirement that is not started, or was returned	→ S03.4	Scholar: dashboard **46** Scholar: a requirement **47**
S03.4	Scholar	Step	Chooses the file: PDF, JPEG, PNG, HEIC or WebP, up to 10 MB. For the Certified Report of Grades, types each subject's code, units and grade	→ S03.5	Scholar: a requirement **47**
S03.5	SEIskolar	By itself	For grades: works out the weighted average as each line is typed	→ S03.6	Scholar: a requirement **47**
S03.6	SEIskolar	Decision	File and grade lines allowed?	No: says what to fix → S03.4 Yes → S03.7	Scholar: a requirement **47**
S03.7	Scholar	Step	Files it	→ S03.8	Scholar: a requirement **47**
S03.8	SEIskolar	By itself	Sends the file straight to private storage, through a link that lasts five minutes	→ S03.9	Scholar: a requirement **47**
S03.9	SEIskolar	Saved	Saved: a new version, never replacing the last, with its grade lines	→ S03.10	Scholar: a requirement **47**
S03.10	Scholar	Status at the end	Status: submitted	→ End	Scholar: a requirement **47**

SWIMLANE 04 OF 10

Check a filing: claim, verify or return, then resubmit

Owner: Zedric Camilotes (@zedric-git)

Covers FR-CHK-001, FR-CHK-002, FR-CHK-003, FR-CHK-004, FR-MON-001 · 12 steps, S04.1 to S04.12 · Lanes: DOST Regional Office, SEIskolar, Scholar, School Coordinator

Starts when a Regional Office checker opens the console. Ends when a filing is verified, or returned and filed again.

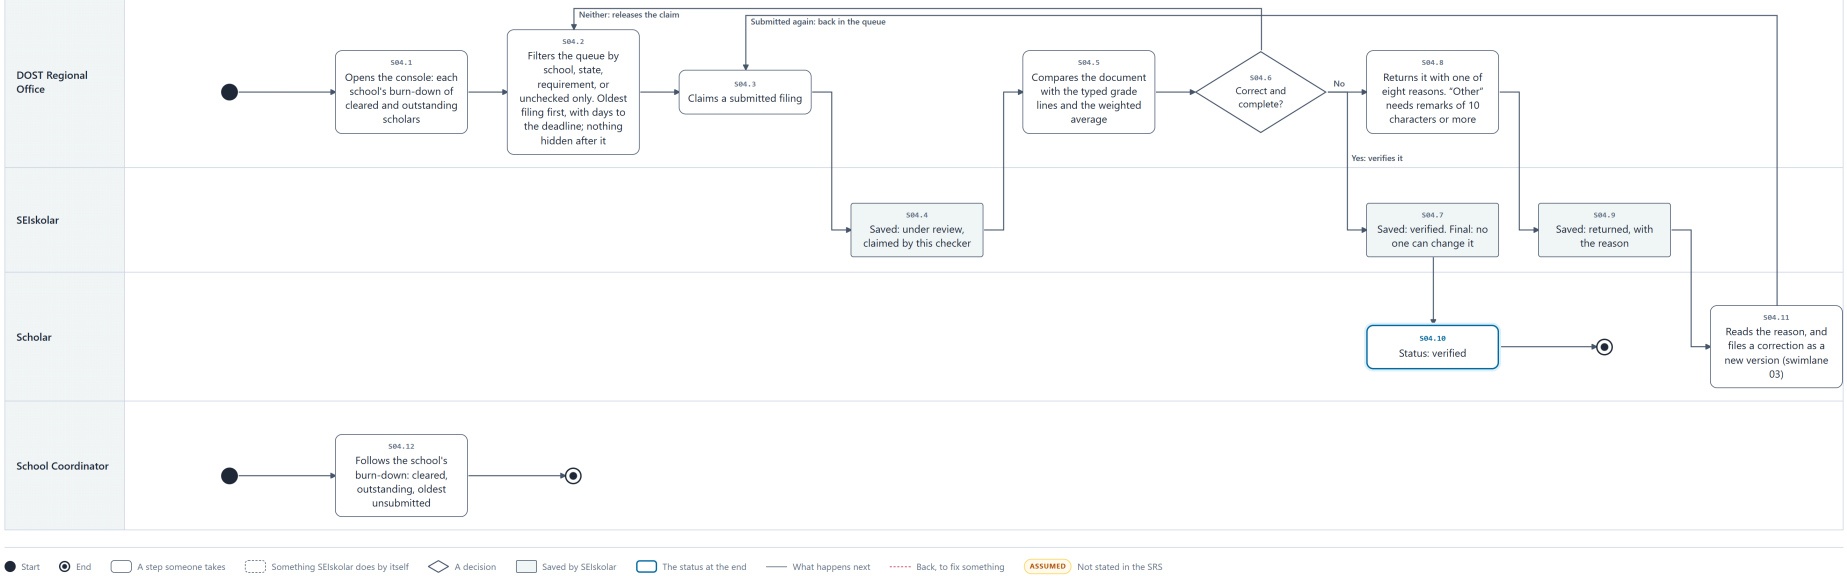

Repository: `02-swimlanes/04-check-a-filing.html` and its picture `04-check-a-filing.png` · Figma: page 02 Swimlanes, section 04-check-a-filing.html · Steps on page **26**

SWIMLANE 04 · THE STEPS

Owner: Zedric Camilotes (@zedric-git)

Check a filing: claim, verify or return, then resubmit

Step	Who	Kind	What happens	Goes to	Served by (wireframe page)
S04.1	DOST Regional Office	Step	Opens the console: each school's burn-down of cleared and outstanding scholars	→ S04.2	Regional Office: home **57**
S04.2	DOST Regional Office	Step	Filters the queue by school, state, requirement, or unchecked only. Oldest filing first, with days to the deadline; nothing hidden after it	→ S04.3	Regional Office: queue **59**
S04.3	DOST Regional Office	Step	Claims a submitted filing	→ S04.4	Regional Office: queue **59** Regional Office: check a filing **60**
S04.4	SEIskolar	Saved	Saved: under review, claimed by this checker	→ S04.5	Regional Office: check a filing **60**
S04.5	DOST Regional Office	Step	Compares the document with the typed grade lines and the weighted average	→ S04.6	Regional Office: check a filing **60**
S04.6	DOST Regional Office	Decision	Correct and complete?	Yes: verifies it → S04.7 No → S04.8 Neither: releases the claim → S04.2	Regional Office: check a filing **60**
S04.7	SEIskolar	Saved	Saved: verified. Final: no one can change it	→ S04.10	Regional Office: check a filing **60**
S04.8	DOST Regional Office	Step	Returns it with one of eight reasons. “Other” needs remarks of 10 characters or more	→ S04.9	Regional Office: check a filing **60**
S04.9	SEIskolar	Saved	Saved: returned, with the reason	→ S04.11	Regional Office: check a filing **60**
S04.10	Scholar	Status at the end	Status: verified	→ End	Scholar: a requirement **47**
S04.11	Scholar	Step	Reads the reason, and files a correction as a new version (swimlane 03)	Submitted again: back in the queue → S04.3	Scholar: a requirement **47**
S04.12	School Coordinator	Step	Follows the school's burn-down: cleared, outstanding, oldest unsubmitted	→ End	Coordinator: home **51**

SWIMLANE 05 OF 10

Release a batch, from cleared to released

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Covers FR-REL-001, FR-REL-002, FR-REL-003 · 13 steps, S05.1 to S05.13 · Lanes: DOST Regional Office, SEIskolar, DOST Central Office, Scholar

Starts when the Regional Office starts a release batch. Ends when the scholar sees it released, or is moved to a later batch.

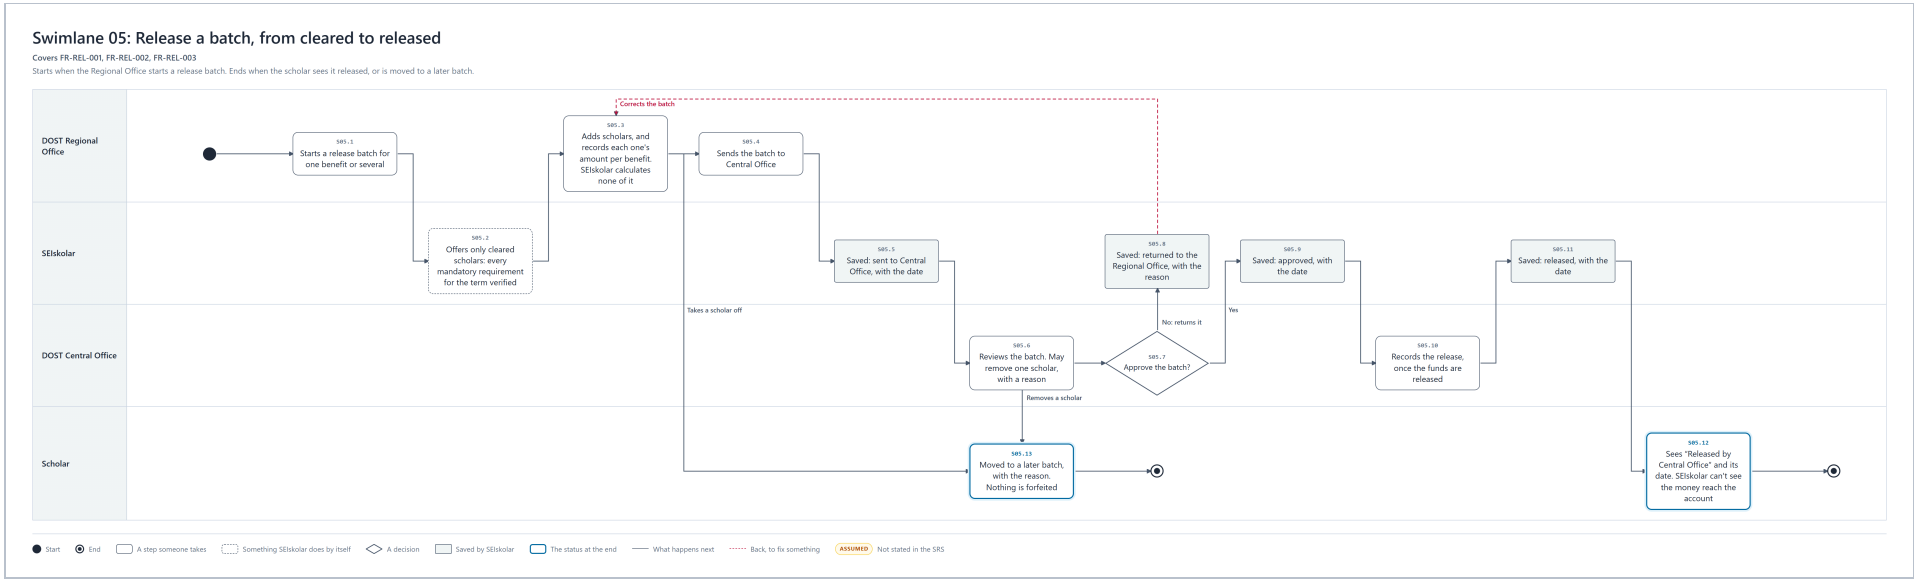

Repository: `02-swimlanes/05-release-a-batch.html` and its picture `05-release-a-batch.png` · Figma: page 02 Swimlanes, section 05-release-a-batch.html · Steps on page **28**

SWIMLANE 05 · THE STEPS

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Release a batch, from cleared to released

Step	Who	Kind	What happens	Goes to	Served by (wireframe page)
S05.1	DOST Regional Office	Step	Starts a release batch for one benefit or several	→ S05.2	Regional Office: release batches **63**
S05.2	SEIskolar	By itself	Offers only cleared scholars: every mandatory requirement for the term verified	→ S05.3	Regional Office: release batches **63**
S05.3	DOST Regional Office	Step	Adds scholars, and records each one's amount per benefit. SEIskolar calculates none of it	→ S05.4 Takes a scholar off → S05.13	Regional Office: release batches **63**
S05.4	DOST Regional Office	Step	Sends the batch to Central Office	→ S05.5	Regional Office: release batches **63**
S05.5	SEIskolar	Saved	Saved: sent to Central Office, with the date	→ S05.6	Regional Office: release batches **63**
S05.6	DOST Central Office	Step	Reviews the batch. May remove one scholar, with a reason	→ S05.7 Removes a scholar → S05.13	Central Office: release batches **73** Central Office: a release batch **74**
S05.7	DOST Central Office	Decision	Approve the batch?	No: returns it → S05.8 Yes → S05.9	Central Office: a release batch **74**
S05.8	SEIskolar	Saved	Saved: returned to the Regional Office, with the reason	Corrects the batch → S05.3	Regional Office: release batches **63** Central Office: a release batch **74**
S05.9	SEIskolar	Saved	Saved: approved, with the date	→ S05.10	Central Office: a release batch **74**
S05.10	DOST Central Office	Step	Records the release, once the funds are released	→ S05.11	Central Office: a release batch **74**
S05.11	SEIskolar	Saved	Saved: released, with the date	→ S05.12	Central Office: a release batch **74**
S05.12	Scholar	Status at the end	Sees “Released by Central Office” and its date. SEIskolar can't see the money reach the account	→ End	Scholar: stipend and tuition **50**
S05.13	Scholar	Status at the end	Moved to a later batch, with the reason. Nothing is forfeited	→ End	Scholar: stipend and tuition **50** Regional Office: release batches **63**

SWIMLANE 06 OF 10

Settle a school's tuition

Owner: Althea Maeve Kinaadman (@Tiamporado)

Covers FR-TUI-001, FR-TUI-002, FR-TUI-003 · 13 steps, S06.1 to S06.13 · Lanes: DOST Regional Office, SEIskolar, School Coordinator, Scholar

Starts when the Regional Office sends a school a tuition remittance. Ends when every scholar on it is credited.

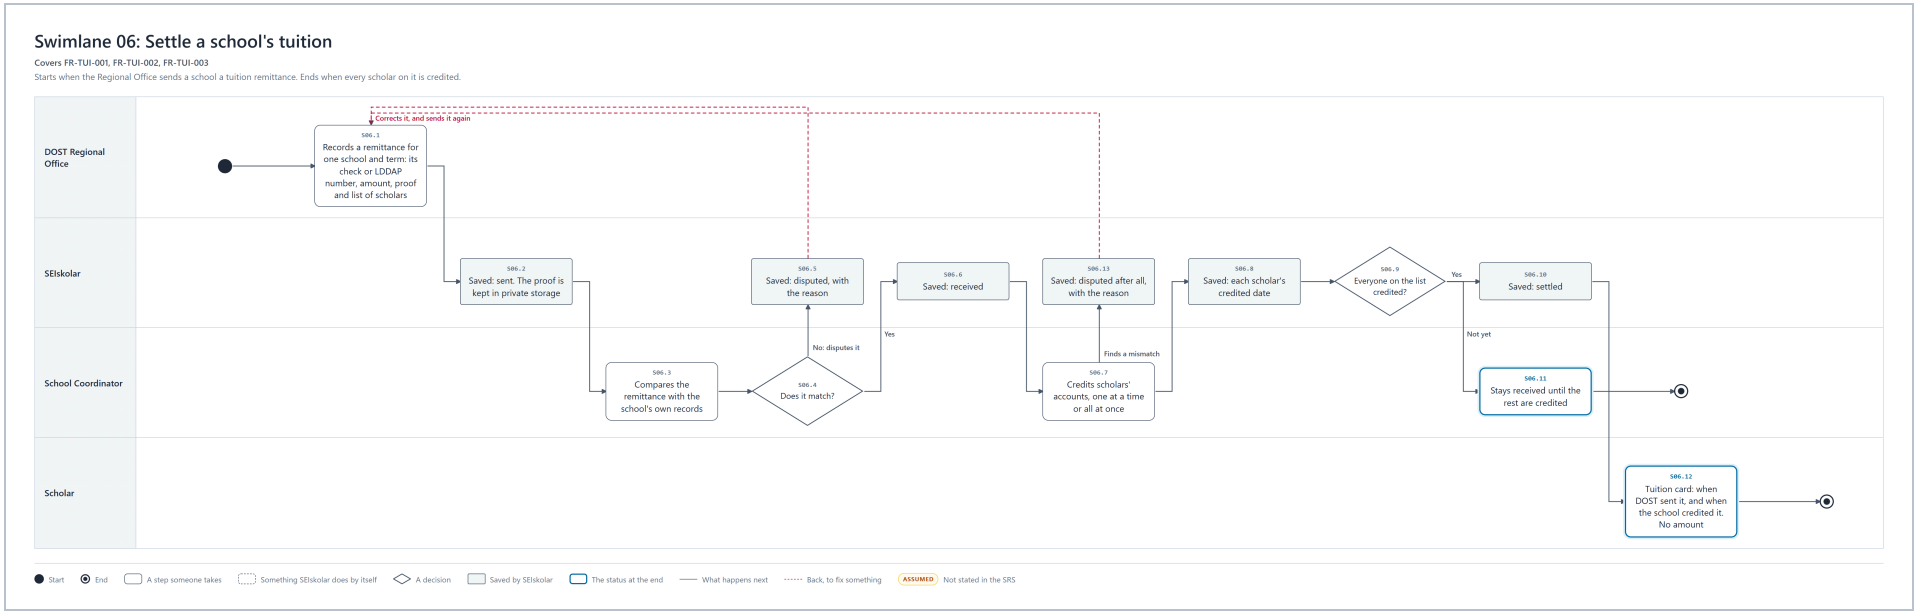

Repository: `02-swimlanes/06-settle-tuition.html` and its picture `06-settle-tuition.png` · Figma: page 02 Swimlanes, section 06-settle-tuition.html · Steps on page 30

SWIMLANE 06 · THE STEPS

Settle a school's tuition

Owner: Althea Maeve Kinaadman (@Tiamporado)

Step	Who	Kind	What happens	Goes to	Served by (wireframe page)
S06.1	DOST Regional Office	Step	Records a remittance for one school and term: its check or LDDAP number, amount, proof and list of scholars	→ S06.2	Regional Office: tuition remittances **65**
S06.2	SEIskolar	Saved	Saved: sent. The proof is kept in private storage	→ S06.3	Regional Office: tuition remittances **65**
S06.3	School Coordinator	Step	Compares the remittance with the school's own records	→ S06.4	Coordinator: tuition remittances **54**
S06.4	School Coordinator	Decision	Does it match?	No: disputes it → S06.5 Yes → S06.6	Coordinator: tuition remittances **54**
S06.5	SEIskolar	Saved	Saved: disputed, with the reason	→ S06.1	Coordinator: tuition remittances **54** Regional Office: tuition remittances **65**
S06.6	SEIskolar	Saved	Saved: received	→ S06.7	Coordinator: tuition remittances **54**
S06.7	School Coordinator	Step	Credits scholars' accounts, one at a time or all at once	Finds a mismatch → S06.13 → S06.8	Coordinator: tuition remittances **54**
S06.8	SEIskolar	Saved	Saved: each scholar's credited date	→ S06.9	Coordinator: tuition remittances **54**
S06.9	SEIskolar	Decision	Everyone on the list credited?	Yes → S06.10 Not yet → S06.11	Coordinator: tuition remittances **54**
S06.10	SEIskolar	Saved	Saved: settled	→ S06.12	Coordinator: tuition remittances **54**
S06.11	School Coordinator	Status at the end	Stays received until the rest are credited	→ End	Coordinator: tuition remittances **54**
S06.12	Scholar	Status at the end	Tuition card: when DOST sent it, and when the school credited it. No amount	→ End	Scholar: stipend and tuition **50**
S06.13	SEIskolar	Saved	Saved: disputed after all, with the reason	Corrects it, and sends it again → S06.1	Coordinator: tuition remittances **54** Regional Office: tuition remittances **65**

SWIMLANE 07 OF 10

Change a benefit, or propose a change

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Covers FR-BEN-001, FR-BEN-002, FR-BEN-003 · 9 steps, S07.1 to S07.9 · Lanes: DOST Regional Office, SEIskolar, DOST Central Office, Scholar

Starts when Central Office changes a benefit, or the Regional Office proposes a change. Ends when scholars see their benefits.

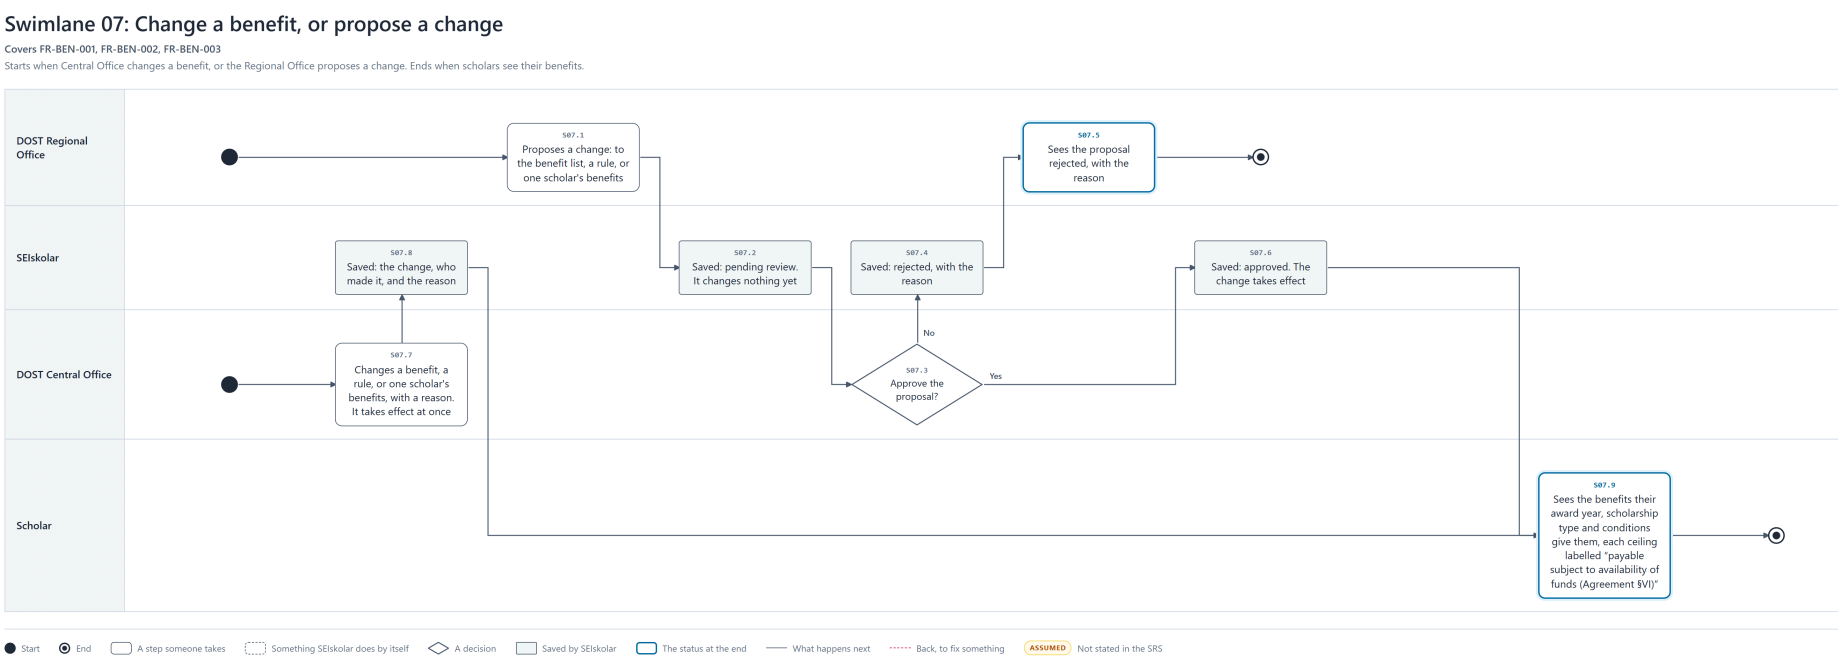

Repository: `02-swimlanes/07-change-a-benefit.html` and its picture `07-change-a-benefit.png` · Figma: page 02 Swimlanes, section 07-change-a-benefit.html · Steps on page 32

SWIMLANE 07 · THE STEPS

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Change a benefit, or propose a change

Step	Who	Kind	What happens	Goes to	Served by (wireframe page)
S07.1	DOST Regional Office	Step	Proposes a change: to the benefit list, a rule, or one scholar's benefits	→ S07.2	Regional Office: benefit proposals **67**
S07.2	SEIskolar	Saved	Saved: pending review. It changes nothing yet	→ S07.3	Regional Office: benefit proposals **67**
S07.3	DOST Central Office	Decision	Approve the proposal?	No → S07.4 Yes → S07.6	Central Office: proposals **79**
S07.4	SEIskolar	Saved	Saved: rejected, with the reason	→ S07.5	Central Office: proposals **79**
S07.5	DOST Regional Office	Status at the end	Sees the proposal rejected, with the reason	→ End	Regional Office: benefit proposals **67**
S07.6	SEIskolar	Saved	Saved: approved. The change takes effect	→ S07.9	Central Office: proposals **79**
S07.7	DOST Central Office	Step	Changes a benefit, a rule, or one scholar's benefits, with a reason. It takes effect at once	→ S07.8	Central Office: benefits **76**
S07.8	SEIskolar	Saved	Saved: the change, who made it, and the reason	→ S07.9	Central Office: benefits **76**
S07.9	Scholar	Status at the end	Sees the benefits their award year, scholarship type and conditions give them, each ceiling labelled “payable subject to availability of funds (Agreement §VI)”	→ End	Scholar: stipend and tuition **50**

SWIMLANE 08 OF 10

Owner: Dorothy Biatriz Capao (@dbeenutsz)

Set up a school and its people, and record a transfer

Covers FR-ADM-001, FR-ADM-002; §4.1 “Maintain Reference Data” · 13 steps, S08.1 to S08.13 · Lanes: System administrator, SEIskolar, DOST Regional Office, New coordinator or scholar, Scholar

Part A starts with the system administrator and ends when a new account signs in. Part B starts when a scholar changes school. · In 2 parts: A. Setting up a school and its people; B. Recording a transfer

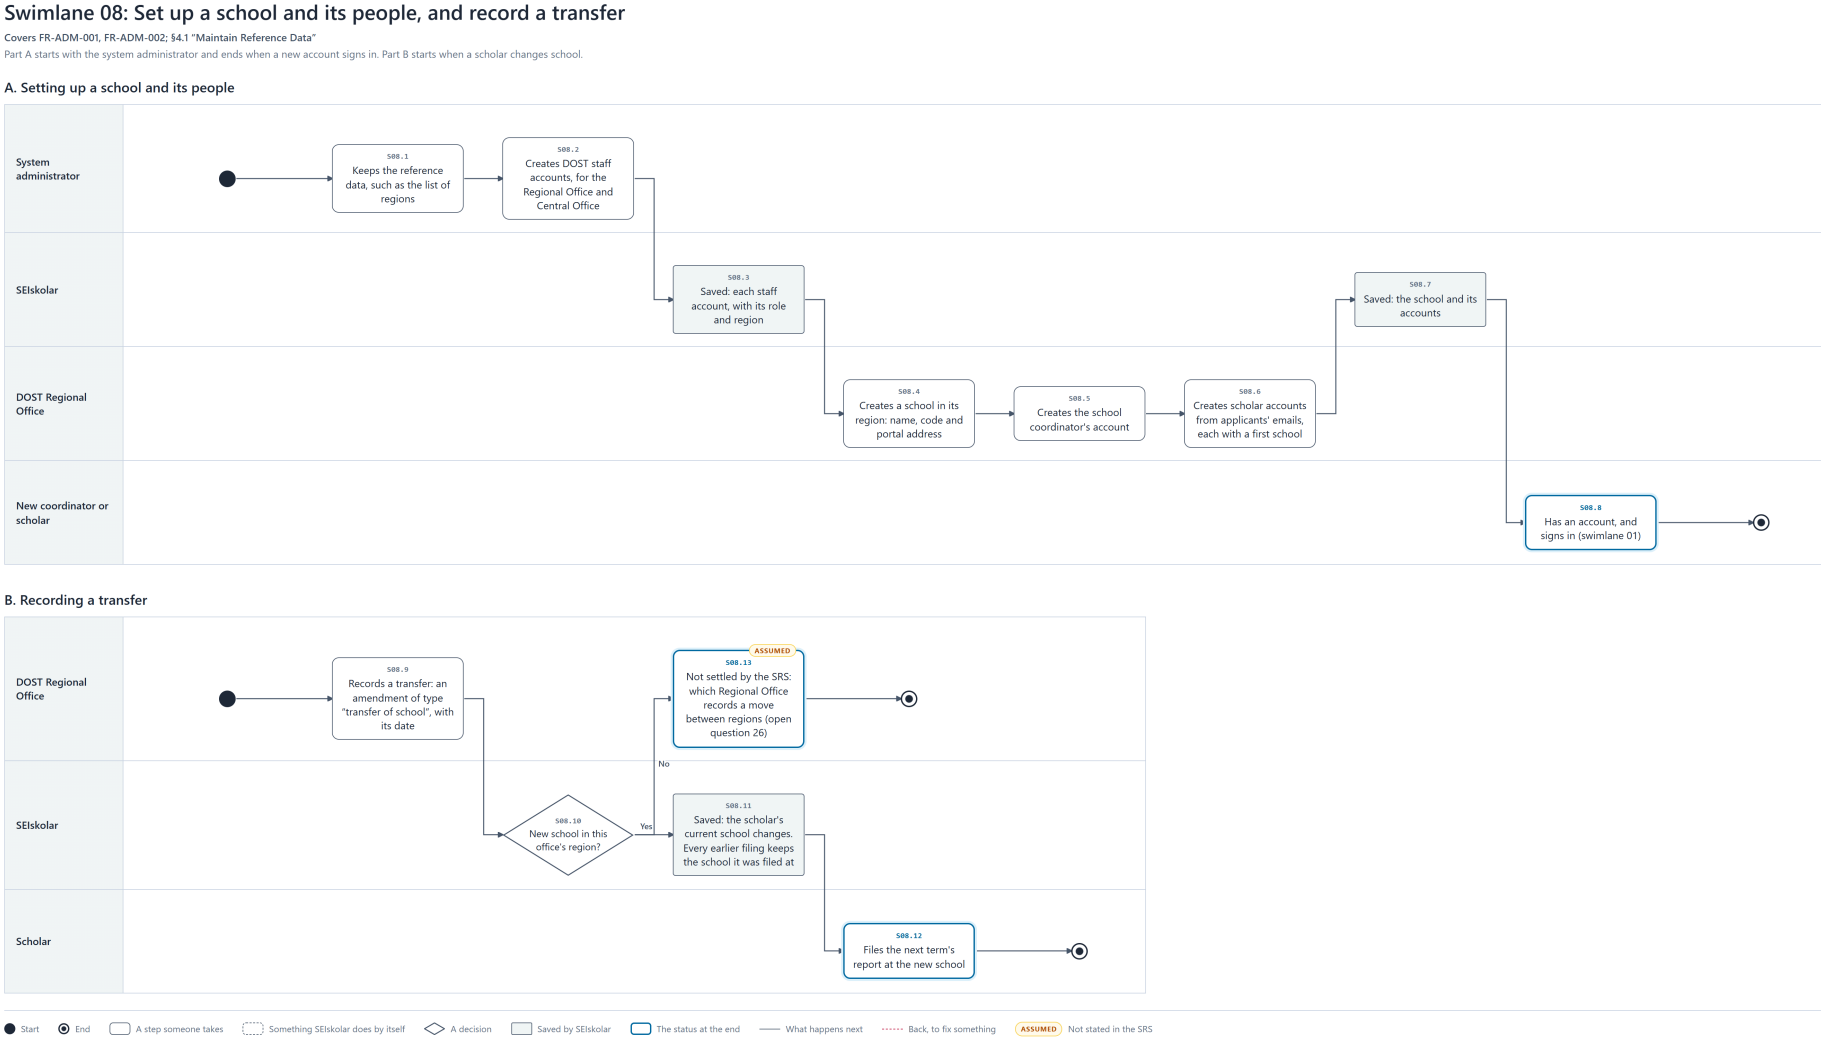

Repository: `02-swimlanes/08-set-up-schools-and-people.html` and its picture `08-set-up-schools-and-people.png` · Figma: page 02 Swimlanes, section 08-set-up-schools-and-people.html · Steps on page **34**

SWIMLANE 08 · THE STEPS

Owner: Dorothy Biatriz Capao (@dbeenutsz)

Set up a school and its people, and record a transfer

Step	Who	Kind	What happens	Goes to	Served by (wireframe page)
S08.1	System administrator	Step	Keeps the reference data, such as the list of regions	→ S08.2	Administrator: regions **82**
S08.2	System administrator	Step	Creates DOST staff accounts, for the Regional Office and Central Office	→ S08.3	Administrator: DOST staff accounts **81**
S08.3	SEIskolar	Saved	Saved: each staff account, with its role and region	→ S08.4	Administrator: DOST staff accounts **81**
S08.4	DOST Regional Office	Step	Creates a school in its region: name, code and portal address	→ S08.5	Regional Office: schools **68**
S08.5	DOST Regional Office	Step	Creates the school coordinator's account	→ S08.6	Regional Office: accounts **69**
S08.6	DOST Regional Office	Step	Creates scholar accounts from applicants' emails, each with a first school	→ S08.7	Regional Office: accounts **69**
S08.7	SEIskolar	Saved	Saved: the school and its accounts	→ S08.8	Regional Office: accounts **69**
S08.8	New coordinator or scholar	Status at the end	Has an account, and signs in (swimlane 01)	→ End	Sign in **41**
S08.9	DOST Regional Office	Step	Records a transfer: an amendment of type “transfer of school”, with its date	→ S08.10	Regional Office: transfers **71**
S08.10	SEIskolar	Decision	New school in this office's region?	Yes → S08.11 No → S08.13	Regional Office: transfers **71**
S08.11	SEIskolar	Saved	Saved: the scholar's current school changes. Every earlier filing keeps the school it was filed at	→ S08.12	Regional Office: transfers **71**
S08.12	Scholar	Status at the end	Files the next term's report at the new school	→ End	Scholar: dashboard **46**
S08.13	DOST Regional Office	Status at the end	Not settled by the SRS: which Regional Office records a move between regions (open question 26) **ASSUMED**	→ End	Regional Office: transfers **71**

SWIMLANE 09 OF 10

Set up the school portal: branding, grading, thresholds

Owner: Althea Maeve Kinaadman (@Tiamporado)

Covers FR-ADM-003 · 6 steps, S09.1 to S09.6 · Lanes: School Coordinator, SEIskolar, DOST Central Office, Scholar

Starts when a coordinator sets up the school's portal, or Central Office sets the school's threshold. Ends when scholars see both.

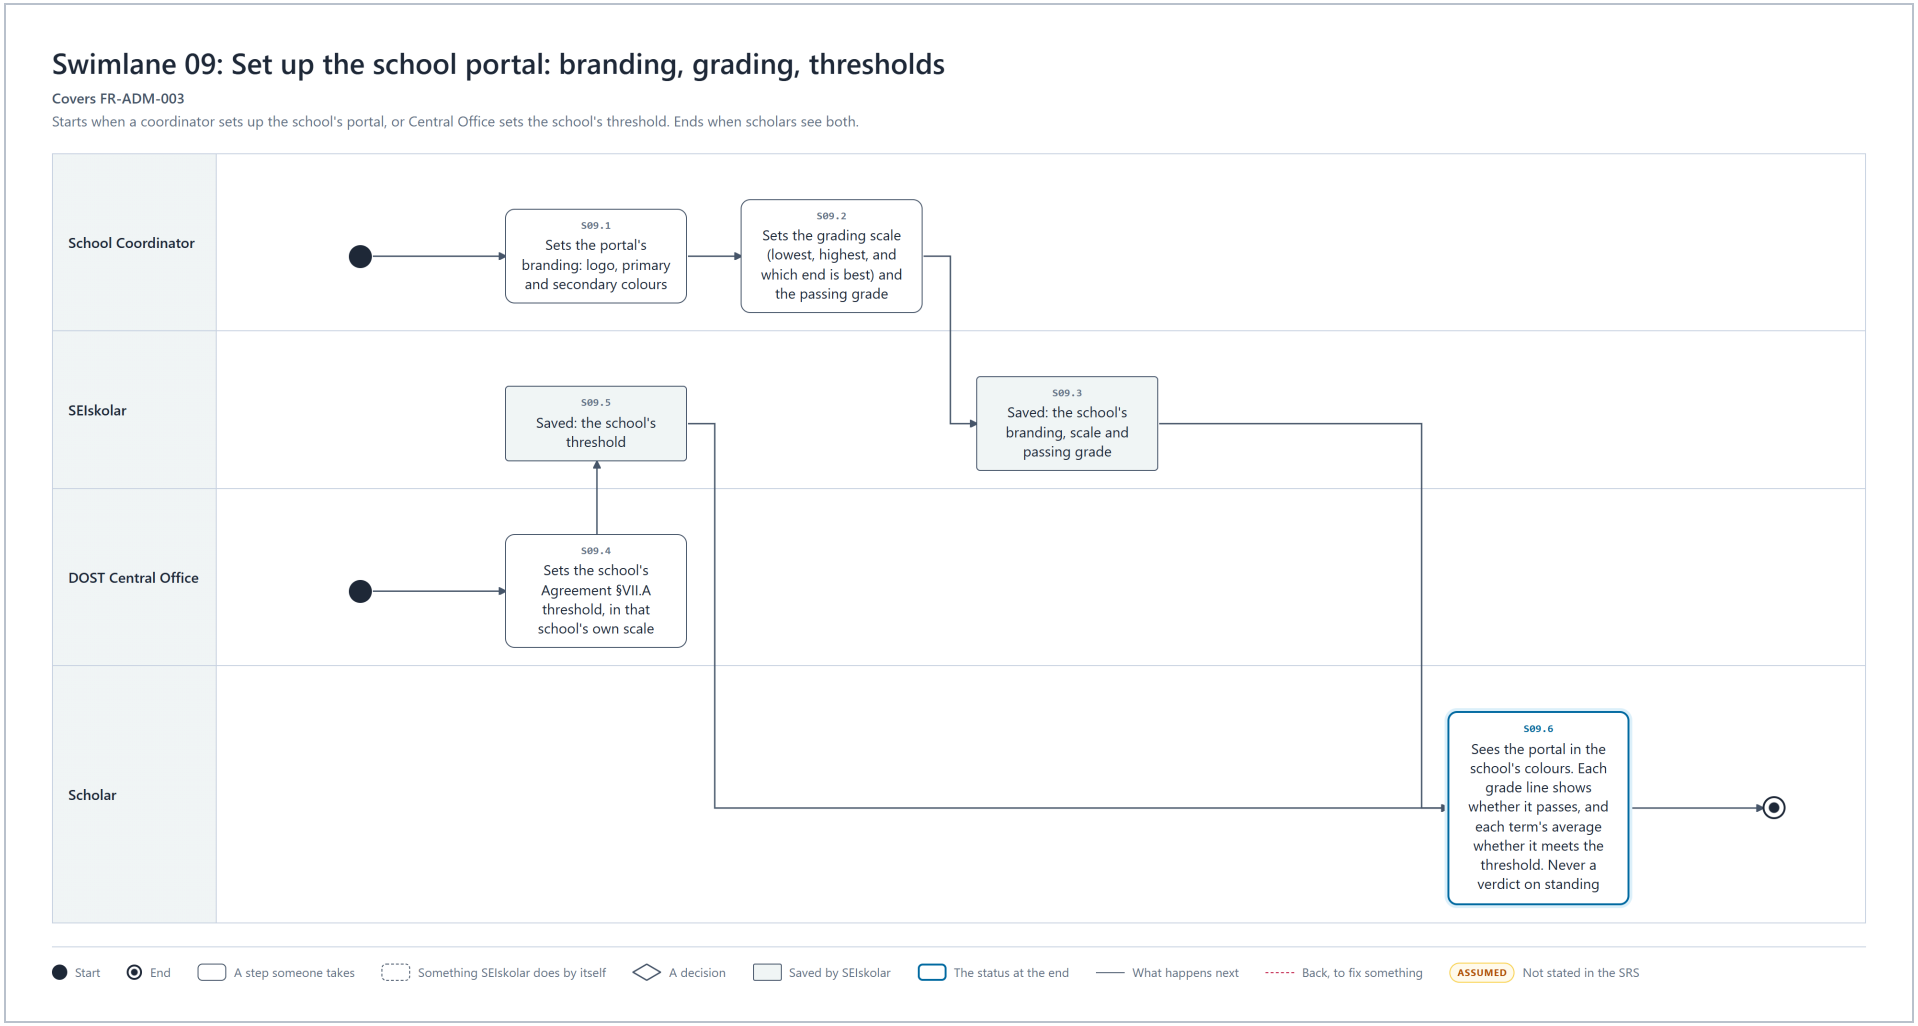

Repository: `02-swimlanes/09-set-up-the-school-portal.html` and its picture `09-set-up-the-school-portal.png` · Figma: page 02 Swimlanes, section 09-set-up-the-school-portal.html · Steps on page **36**

SWIMLANE 09 · THE STEPS

Owner: Althea Maeve Kinaadman (@Tiamporado)

Set up the school portal: branding, grading, thresholds

Step	Who	Kind	What happens	Goes to	Served by (wireframe page)
S09.1	School Coordinator	Step	Sets the portal's branding: logo, primary and secondary colours	→ S09.2	Coordinator: portal settings **56**
S09.2	School Coordinator	Step	Sets the grading scale (lowest, highest, and which end is best) and the passing grade	→ S09.3	Coordinator: portal settings **56**
S09.3	SEIskolar	Saved	Saved: the school's branding, scale and passing grade	→ S09.6	Coordinator: portal settings **56**
S09.4	DOST Central Office	Step	Sets the school's Agreement §VII.A threshold, in that school's own scale	→ S09.5	Central Office: thresholds **80**
S09.5	SEIskolar	Saved	Saved: the school's threshold	→ S09.6	Central Office: thresholds **80**
S09.6	Scholar	Status at the end	Sees the portal in the school's colours. Each grade line shows whether it passes, and each term's average whether it meets the threshold. Never a verdict on standing	→ End	Scholar: a requirement **47**

SWIMLANE 10 OF 10

Look up who did what to a record

Owner: Zedric Camilotes (@zedric-git)

Covers NFR-SEC-003; §4.1 “Inspect Immutable Audit Logs” · 8 steps, S10.1 to S10.8 · Lanes: Anyone who changes a record, SEIskolar, DOST Regional Office or Central Office

Starts when anyone changes a record. Ends when DOST staff read its history. Scholars and coordinators cannot read it at all (§2.2).

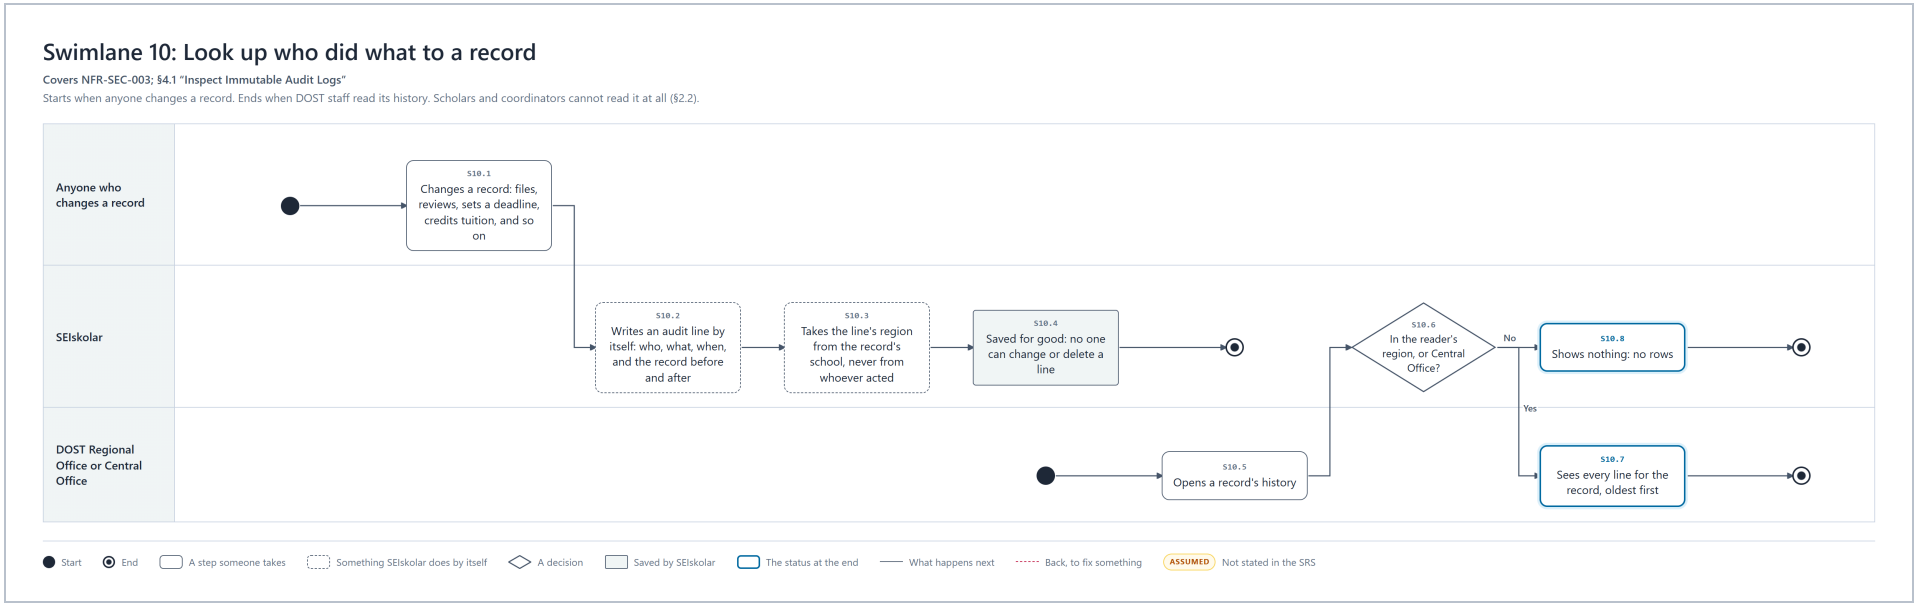

Repository: `02-swimlanes/10-look-up-who-did-what.html` and its picture `10-look-up-who-did-what.png` · Figma: page 02 Swimlanes, section 10-look-up-who-did-what.html · Steps on page **38**

SWIMLANE 10 · THE STEPS

Owner: Zedric Camilotes (@zedric-git)

Look up who did what to a record

Step	Who	Kind	What happens	Goes to	Served by (wireframe page)
S10.1	Anyone who changes a record	Step	Changes a record: files, reviews, sets a deadline, credits tuition, and so on	→ S10.2	Every screen that saves something
S10.2	SEIskolar	By itself	Writes an audit line by itself: who, what, when, and the record before and after	→ S10.3	None: SEIskolar does this by itself
S10.3	SEIskolar	By itself	Takes the line's region from the record's school, never from whoever acted	→ S10.4	None: SEIskolar does this by itself
S10.4	SEIskolar	Saved	Saved for good: no one can change or delete a line	→ End	None: SEIskolar does this by itself
S10.5	DOST Regional Office or Central Office	Step	Opens a record's history	→ S10.6	A record's history **72**
S10.6	SEIskolar	Decision	In the reader's region, or Central Office?	Yes → S10.7 No → S10.8	A record's history **72**
S10.7	DOST Regional Office or Central Office	Status at the end	Sees every line for the record, oldest first	→ End	A record's history **72**
S10.8	SEIskolar	Status at the end	Shows nothing: no rows	→ End	A record's history **72**

B Low-fidelity wireframes

One wireframe per screen, drawn for a phone, a tablet and a desktop: 29 screens in 42 states, 126 pictures. Each serves steps of a swimlane, and names them at its foot.

Grey boxes and real words: no colour, images or branding, only the layout, the labels, and what each part holds, so review stays on content. Every wireframe shares one frame: a bar of tabs along the bottom of a phone, a rail on a tablet, a sidebar on a desktop. A screen with states, such as a requirement before and after it is returned, has a page per state. The grey line at each wireframe's foot names the steps it serves.

#	Screen	States	Serves	Owner	Page
1	Sign in	school, console, wrong password	S01.1 to S01.4, S08.8	Genril Theo Soroño	41
2	Account not ready	one	S01.5, S01.6	Genril Theo Soroño	44
3	Nothing to show	one	S01.9, S01.10, S01.12	Genril Theo Soroño	45
4	Scholar: dashboard	one	S01.8, S02.8 to S02.11, S03.1 to S03.3, S08.12	Genril Theo Soroño	46
5	Scholar: a requirement	not started, returned, verified	S01.11, S03.3 to S03.10, S04.10, S04.11, S09.6	Genril Theo Soroño	47
6	Scholar: stipend and tuition	one	S05.12, S05.13, S06.12, S07.9	Althea Maeve Kinaadman	50
7	Coordinator: home	one	S04.12	Zedric Camilotes	51
8	Coordinator: academic calendar	one	S02.1, S02.2, S02.4	Dorothy Biatriz Capao	52
9	Coordinator: requirement names	one	S02.3, S02.4	Dorothy Biatriz Capao	53
10	Coordinator: tuition remittances	check, crediting	S06.3 to S06.11, S06.13	Althea Maeve Kinaadman	54
11	Coordinator: portal settings	one	S09.1 to S09.3	Althea Maeve Kinaadman	56
12	Regional Office: home	one	S04.1	Zedric Camilotes	57
13	Regional Office: checklist and deadline	one	S02.5 to S02.7	Zedric Camilotes	58
14	Regional Office: queue	one	S04.2, S04.3	Zedric Camilotes	59
15	Regional Office: check a filing	unclaimed, claimed, returning	S04.3 to S04.9	Zedric Camilotes	60
16	Regional Office: release batches	draft, returned	S05.1 to S05.5, S05.8, S05.13	Adrian Seth Tabotabo	63
17	Regional Office: tuition remittances	record, disputed	S06.1, S06.2, S06.5, S06.13	Althea Maeve Kinaadman	65
18	Regional Office: benefit proposals	one	S07.1, S07.2, S07.5	Adrian Seth Tabotabo	67
19	Regional Office: schools	one	S08.4	Dorothy Biatriz Capao	68
20	Regional Office: accounts	scholars, coordinators	S08.5 to S08.7	Dorothy Biatriz Capao	69
21	Regional Office: transfers	one	S08.9 to S08.11, S08.13	Dorothy Biatriz Capao	71
22	A record's history	one	S10.5 to S10.8	Zedric Camilotes	72
23	Central Office: release batches	one	S05.6	Adrian Seth Tabotabo	73

#	Screen	States	Serves	Owner	Page
24	Central Office: a release batch	review, approved	S05.6 to S05.11	Adrian Seth Tabotabo	74
25	Central Office: benefits	benefits, rules, scholar	S07.7, S07.8	Adrian Seth Tabotabo	76
26	Central Office: proposals	one	S07.3, S07.4, S07.6	Adrian Seth Tabotabo	79
27	Central Office: thresholds	one	S09.4, S09.5	Althea Maeve Kinaadman	80
28	Administrator: DOST staff accounts	one	S08.2, S08.3	Genril Theo Soroño	81
29	Administrator: regions	one	S08.1	Dorothy Biatriz Capao	82

LOW-FIDELITY WIREFRAME 1 OF 29

Sign in

School · state 1 of 3

Owner: Genril Theo Soroño (@gnthril)

Serves S01.1 to S01.4, S08.8 · FR-IAM-001, FR-IAM-002 · Swimlanes 01, 08 · Finished on page **85**

NOTE The address picks this screen (S01.2): a school's portal address shows that school's portal, and the DOST console's address shows the console. The address grants nothing; the account's role, region and school decide what it sees (FR-IAM-002, FR-IAM-003).

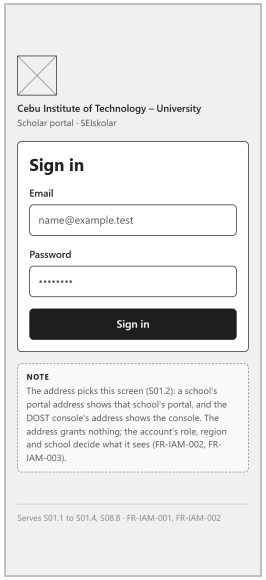

Phone · 360 px

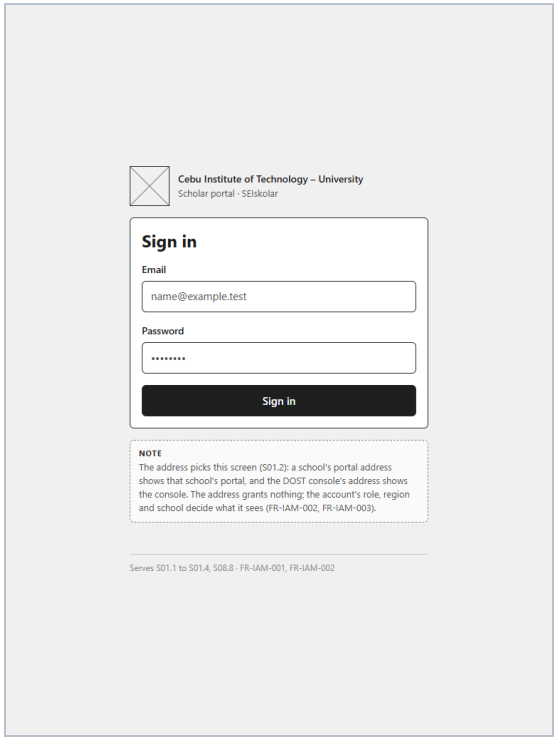

Tablet · 768 px

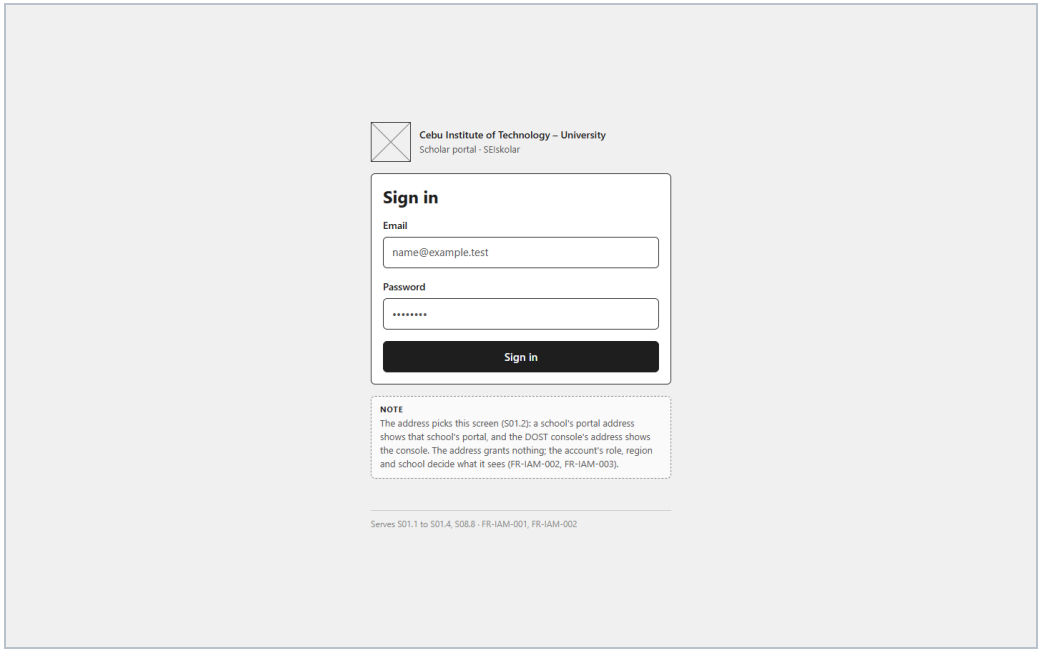

Desktop · 1440 px

Repository: `03-low-fidelity/sign-in.html?state=school` · Figma: page 03 Low-fidelity, section sign-in.html, frames `sign-in--school.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 1 OF 29

Sign in

Console · state 2 of 3

Owner: Genril Theo Soroño (@gnthril)

Serves S01.1 to S01.4, S08.8 · FR-IAM-001, FR-IAM-002 · Swimlanes 01, 08 · Finished on page **86**

NOTE The address picks this screen (S01.2): a school's portal address shows that school's portal, and the DOST console's address shows the console. The address grants nothing; the account's role, region and school decide what it sees (FR-IAM-002, FR-IAM-003).

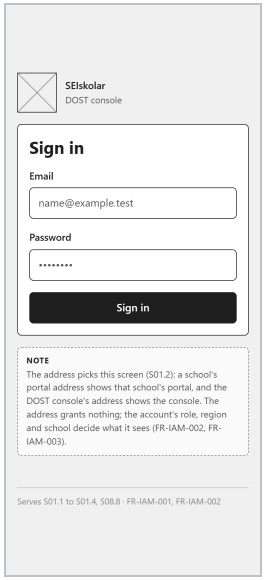

Phone · 360 px

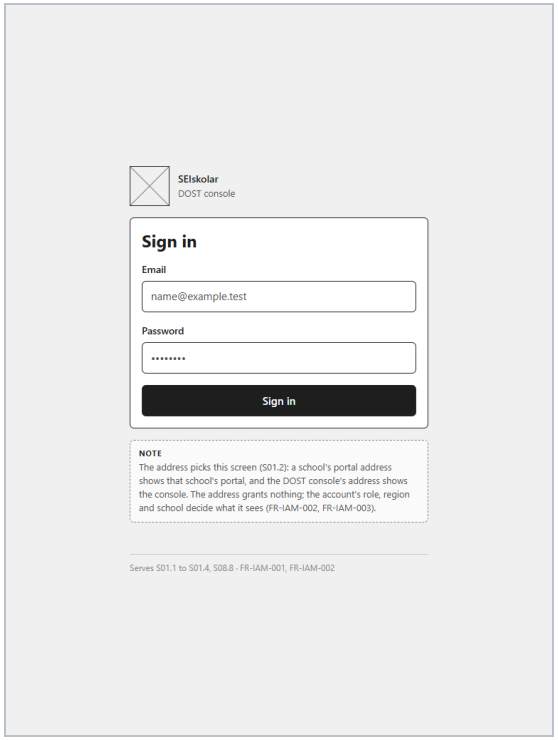

Tablet · 768 px

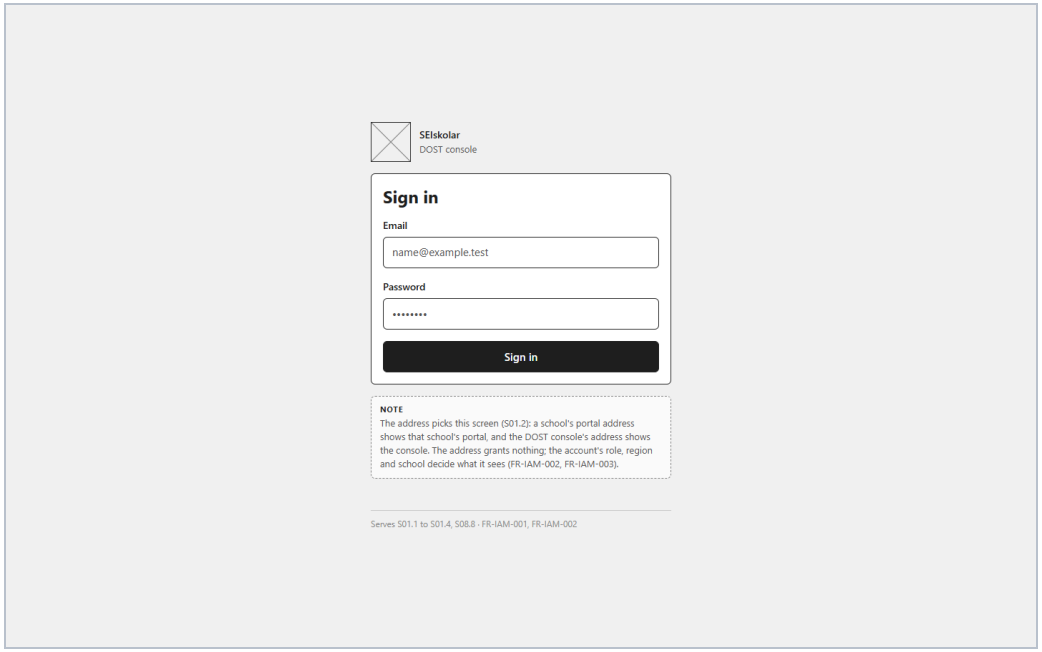

Desktop · 1440 px

Repository: `03-low-fidelity/sign-in.html?state=console` · Figma: page 03 Low-fidelity, section sign-in.html, frames `sign-in--console.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 1 OF 29

Sign in

Wrong Password · state 3 of 3

Owner: Genril Theo Soroño (@gnthril)

Serves S01.1 to S01.4, S08.8 · FR-IAM-001, FR-IAM-002 · Swimlanes 01, 08 · Finished on page **87**

NOTE The address picks this screen (S01.2): a school's portal address shows that school's portal, and the DOST console's address shows the console. The address grants nothing; the account's role, region and school decide what it sees (FR-IAM-002, FR-IAM-003).

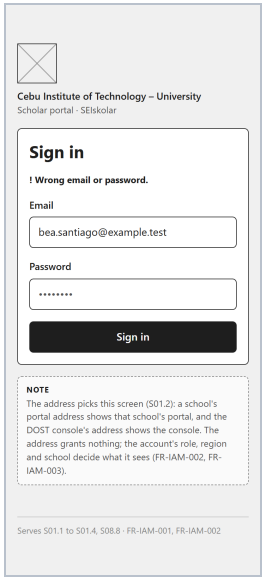

Phone · 360 px

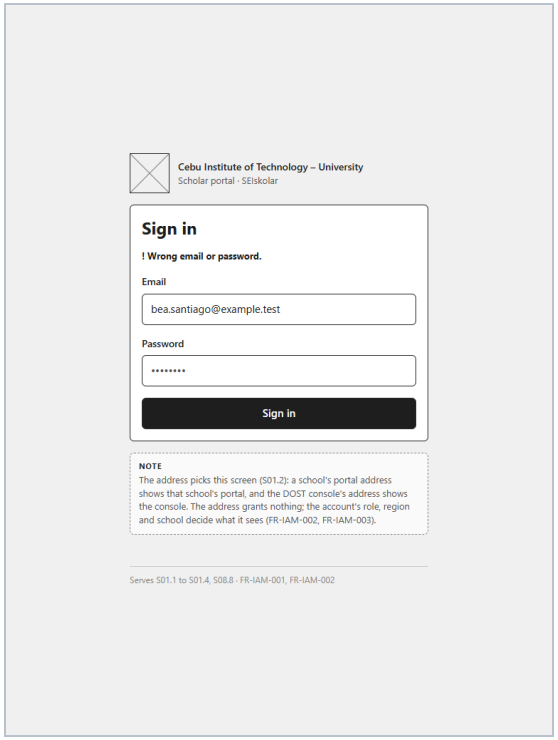

Tablet · 768 px

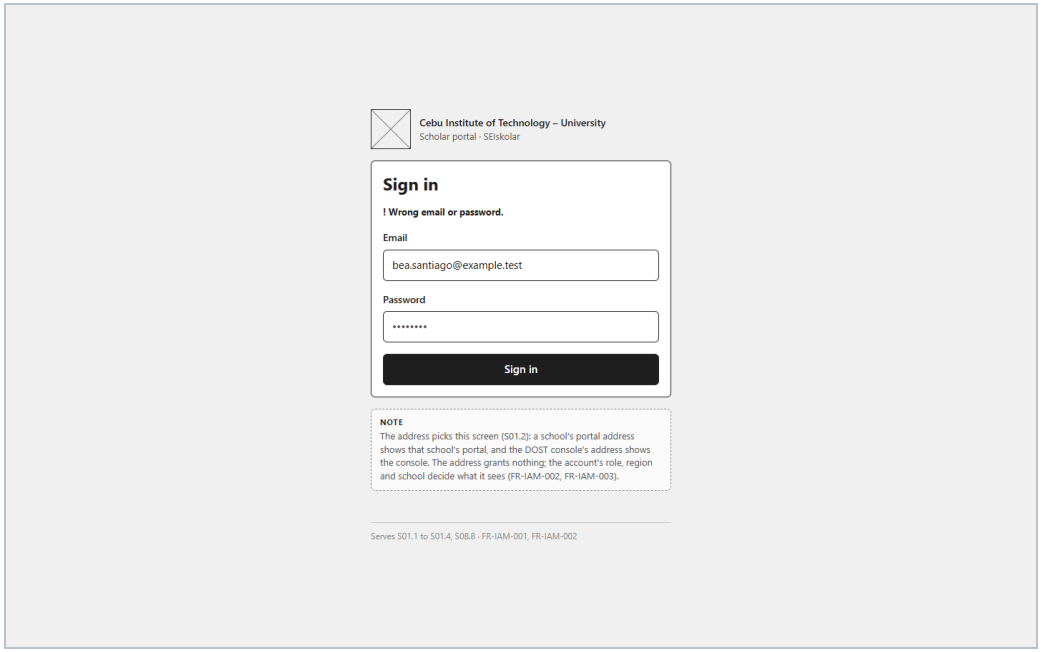

Desktop · 1440 px

Repository: `03-low-fidelity/sign-in.html?state=wrong-password` · Figma: page 03 Low-fidelity, section sign-in.html, frames `sign-in--wrong-password.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 2 OF 29

Account not ready

Owner: Genril Theo Soroño (@gnthril)

Serves S01.5, S01.6 · FR-IAM-001 · Swimlane 01 · Finished on page **88**

NOTE Without a role, region and school, SEIskolar returns no records at all (FR-IAM-001, S01.6). Pointing the person to their Regional Office is our wording; the SRS says only that every list is empty.

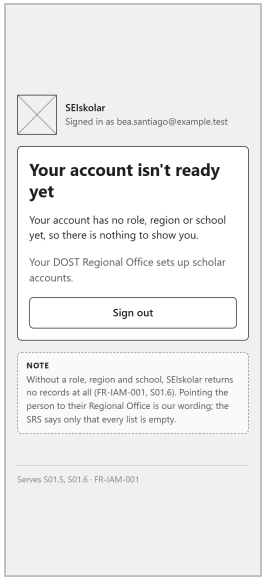

Phone · 360 px

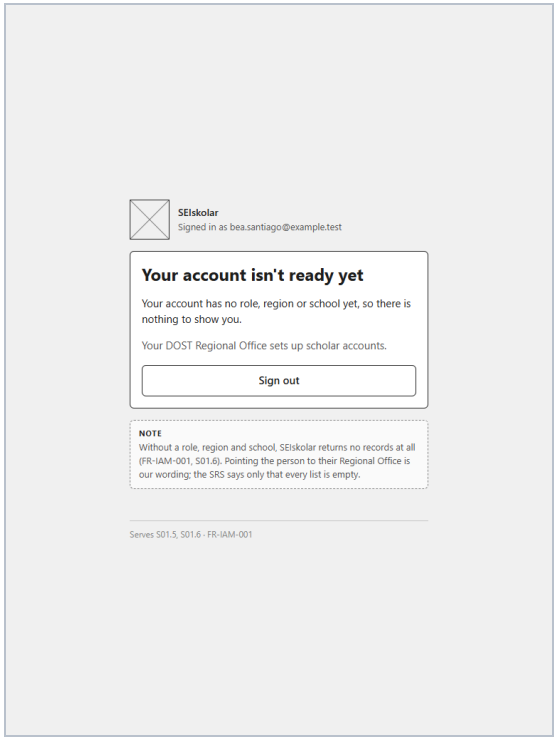

Tablet · 768 px

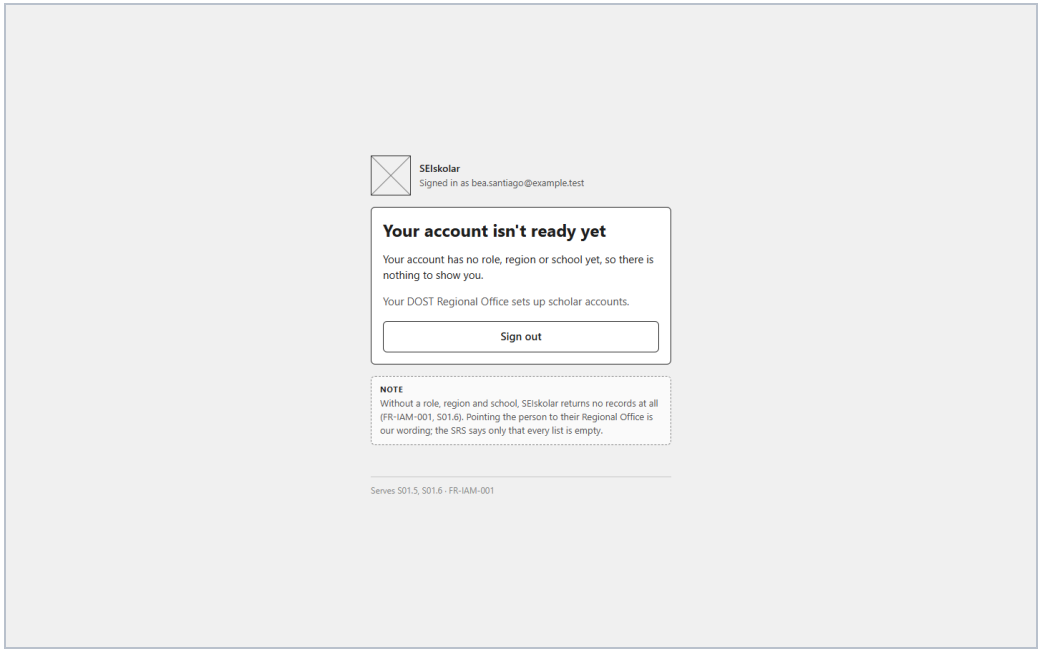

Desktop · 1440 px

Repository: `03-low-fidelity/no-access.html` · Figma: page 03 Low-fidelity, section no-access.html, frames `no-access.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 3 OF 29

Nothing to show

Owner: Genril Theo Soroño (@gnthril)

Serves S01.9, S01.10, S01.12 · FR-IAM-003 · Swimlane 01 · Finished on page **89**

NOTE SElskolar returns no rows rather than an error (FR-IAM-003), so this page cannot tell "does not exist" from "not yours", and must not hint which.

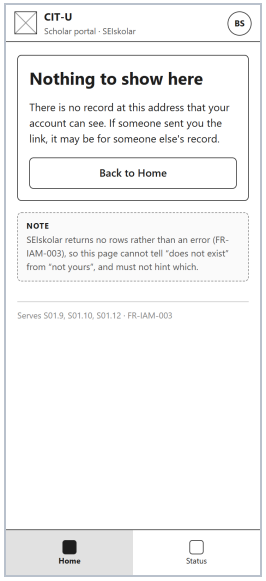

Phone · 360 px

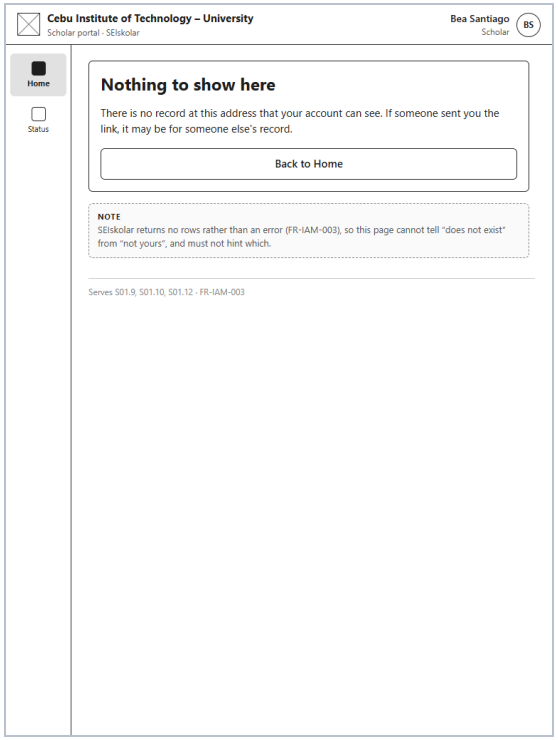

Tablet · 768 px

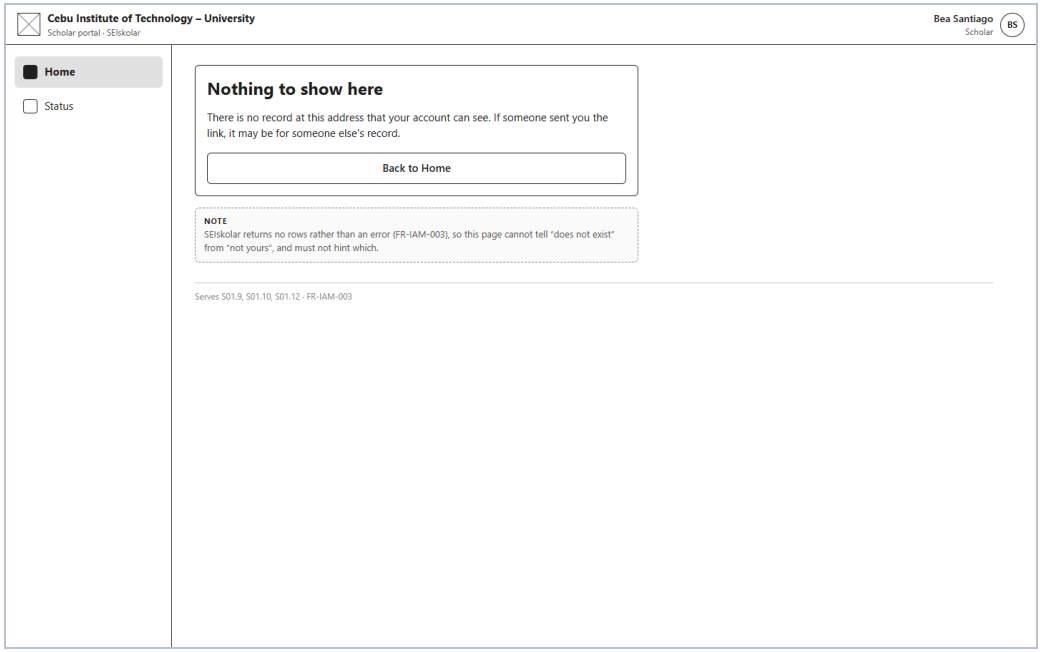

Desktop · 1440 px

Repository: `03-low-fidelity/nothing-found.html` · Figma: page 03 Low-fidelity, section nothing-found.html, frames `nothing-found.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 4 OF 29

Scholar: dashboard

Owner: Genril Theo Soroño (@gnthril)

Serves S01.8, S02.8 to S02.11, S03.1 to S03.3, S08.12 · FR-SCH-001 · Swimlanes 01, 02, 03, 08 · Finished on page **90**

NOTES

- The banner has four states (FR-SCH-001): open with something outstanding, as here; open with everything cleared; closed with something outstanding, which says “Nothing is forfeited — file now, and what you are owed is released with a later batch.”; and closed with everything cleared. With no deadline set there is no banner (S02.11). Days count in Philippine time.
- Each requirement shows its school's name, with DOST's name under it (S02.3). A requirement opens its own screen.

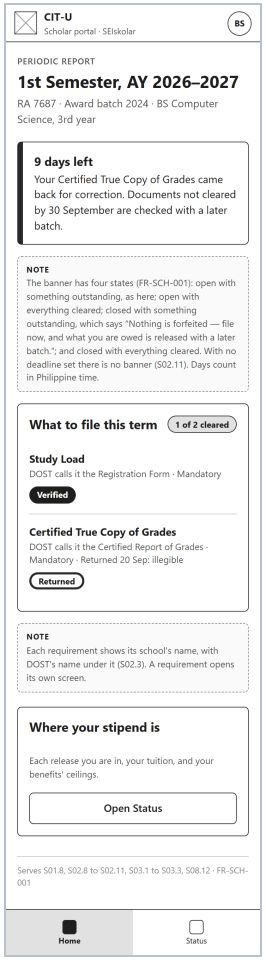

Phone · 360 px

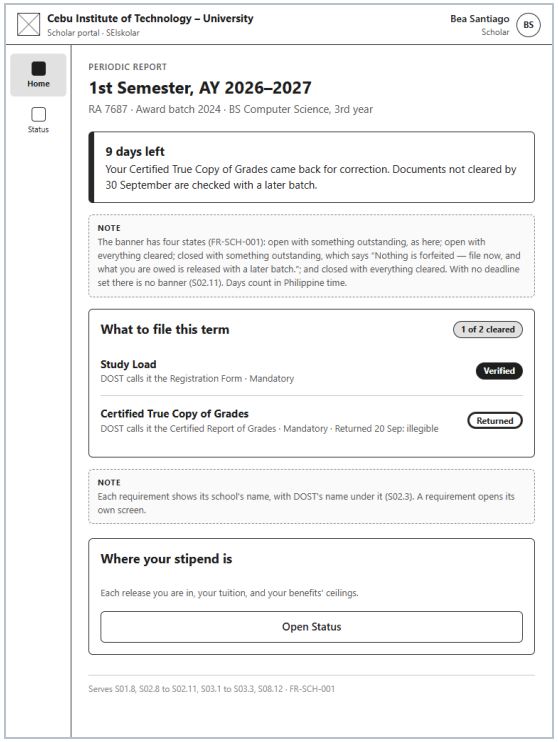

Tablet · 768 px

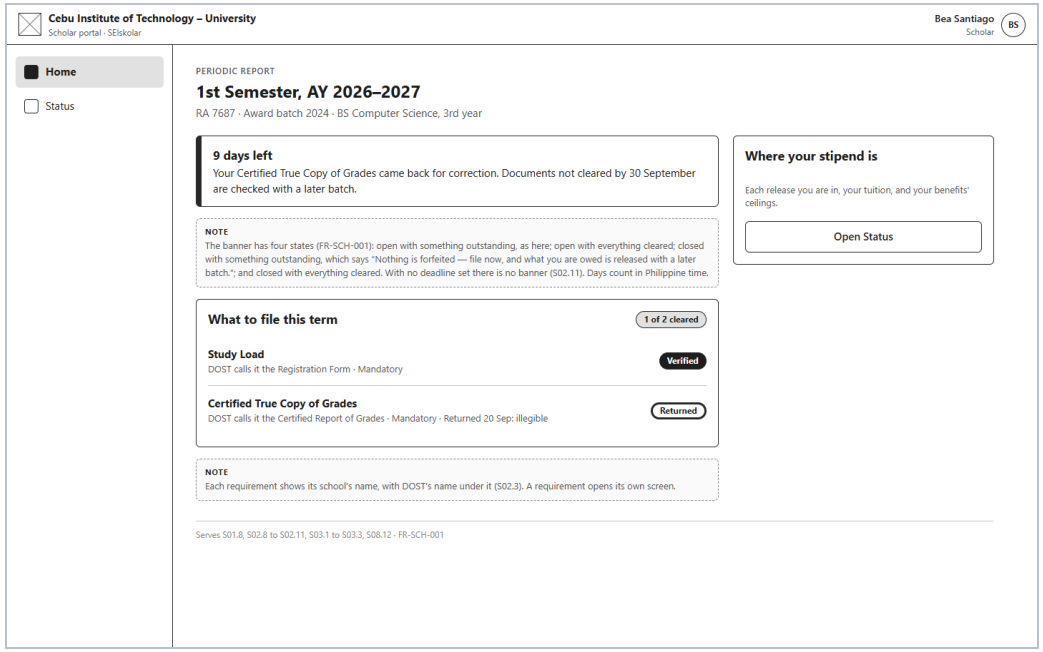

Desktop · 1440 px

Repository: `03-low-fidelity/scholar-dashboard.html` · Figma: page 03 Low-fidelity, section scholar-dashboard.html, frames `scholar-dashboard.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 5 OF 29

Scholar: a requirement

Not Started · state 1 of 3

Owner: Genril Theo Soroño (@gnthril)

Serves S01.11, S03.3 to S03.10, S04.10, S04.11, S09.6 · FR-SCH-002, FR-SCH-003, FR-SCH-004, FR-ADM-003 · Swimlanes 01, 03, 04, 09 · Finished on page **91**

NOTES

- Up to 30 lines; units more than 0 and at most 15; grades inside the school's scale (FR-SCH-003). If the file or a line is not allowed, the screen says what to fix (S03.6). A line may show that it passes, and the average whether it meets the threshold, but never a verdict on standing (FR-ADM-003).
- Filing never replaces an earlier version (S03.9). The file goes straight to private storage, through a link that lasts five minutes (S03.8).

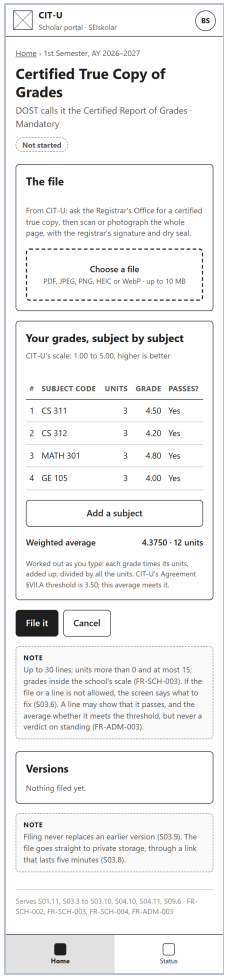

Phone · 360 px

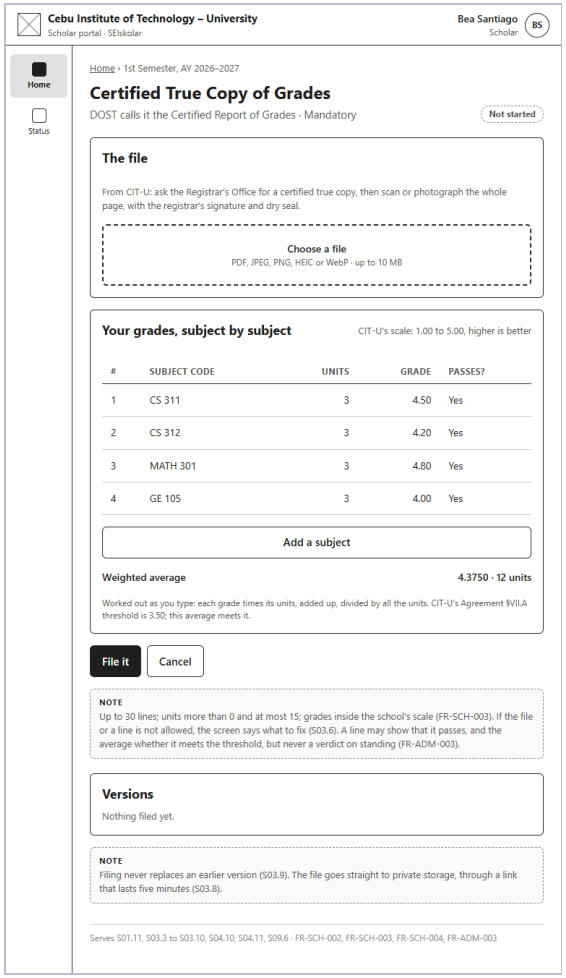

Tablet · 768 px

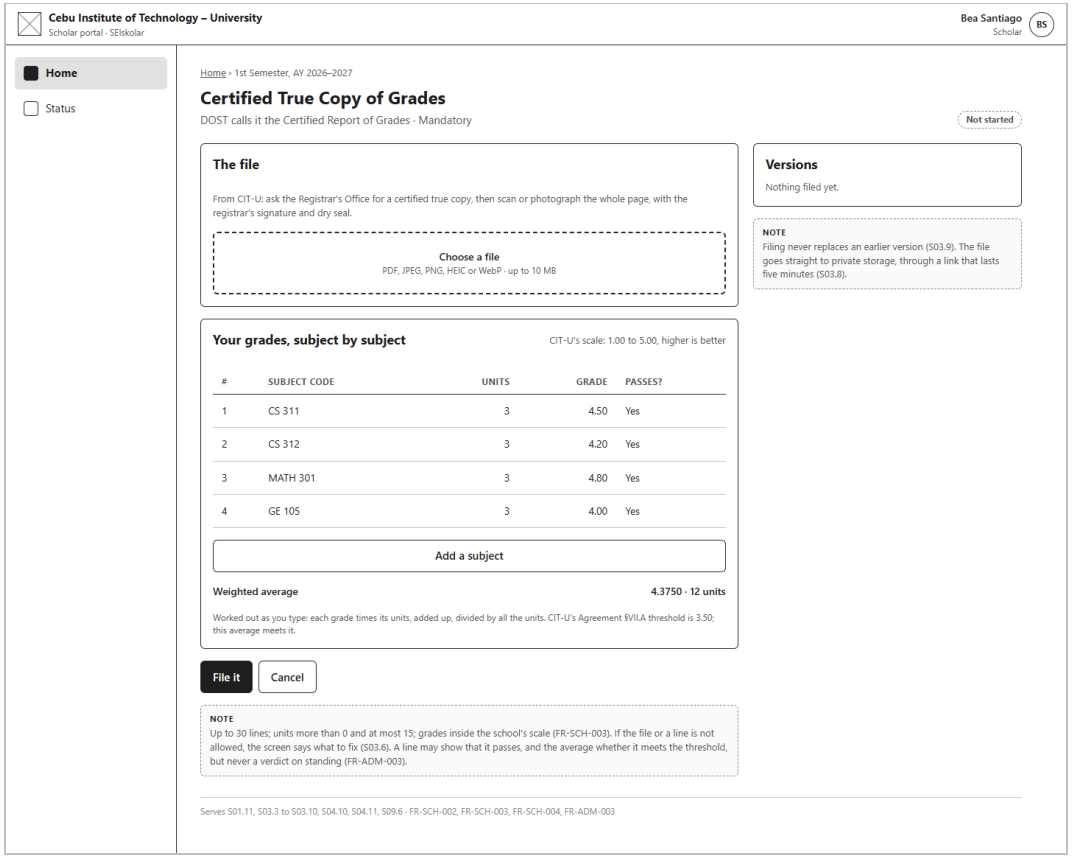

Desktop · 1440 px

Repository: `03-low-fidelity/scholar-requirement.html?state=not-started` · Figma: page 03 Low-fidelity, section scholar-requirement.html, frames `scholar-requirement--not-started.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 5 OF 29

Scholar: a requirement

Returned · state 2 of 3

Owner: Genril Theo Soroño (@gnthril)

Serves S01.11, S03.3 to S03.10, S04.10, S04.11, S09.6 · FR-SCH-002, FR-SCH-003, FR-SCH-004, FR-ADM-003 · Swimlanes 01, 03, 04, 09 · Finished on page **92**

NOTES

- Up to 30 lines; units more than 0 and at most 15; grades inside the school's scale (FR-SCH-003). If the file or a line is not allowed, the screen says what to fix (S03.6). A line may show that it passes, and the average whether it meets the threshold, but never a verdict on standing (FR-ADM-003).
- Filing never replaces an earlier version (S03.9). The file goes straight to private storage, through a link that lasts five minutes (S03.8).

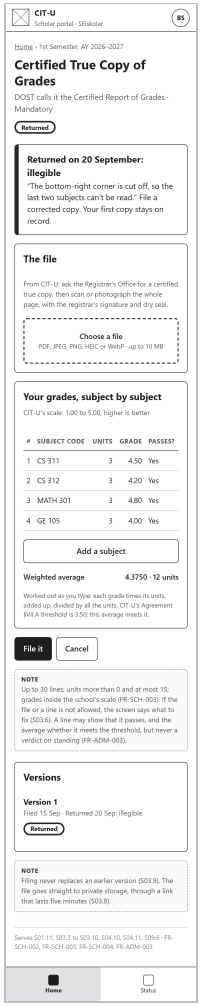

Phone · 360 px

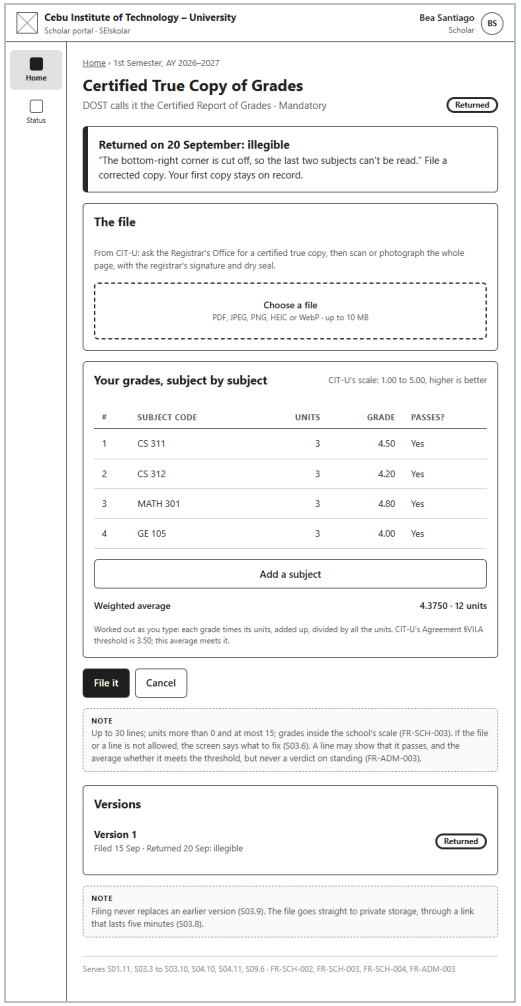

Tablet · 768 px

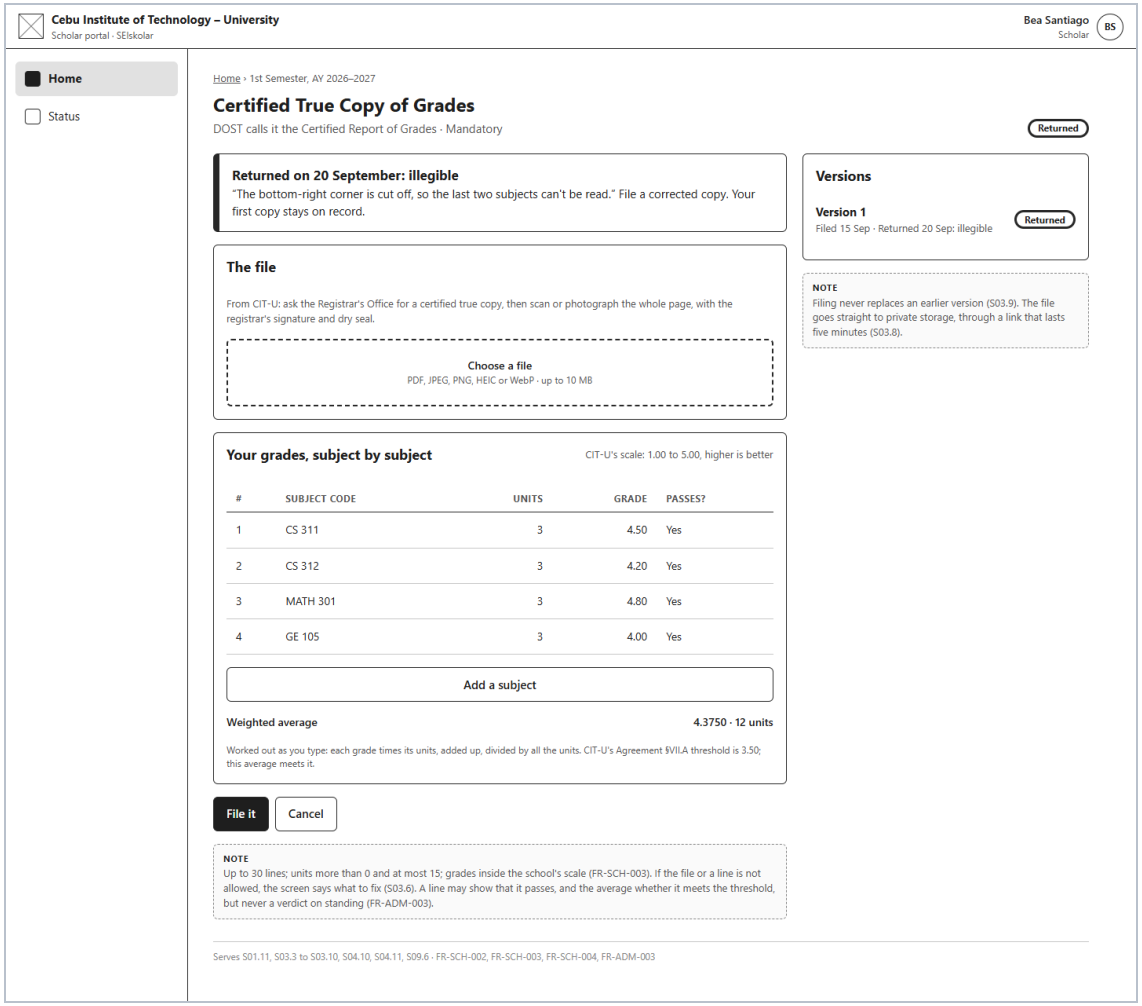

Desktop · 1440 px

Repository: `03-low-fidelity/scholar-requirement.html?state=returned` · Figma: page 03 Low-fidelity, section scholar-requirement.html, frames `scholar-requirement--returned.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 5 OF 29

Scholar: a requirement

Verified · state 3 of 3

Owner: Genril Theo Soroño (@gnthril)

Serves S01.11, S03.3 to S03.10, S04.10, S04.11, S09.6 · FR-SCH-002, FR-SCH-003, FR-SCH-004, FR-ADM-003 · Swimlanes 01, 03, 04, 09 · Finished on page **93**

NOTE Filing never replaces an earlier version (S03.9). The file goes straight to private storage, through a link that lasts five minutes (S03.8).

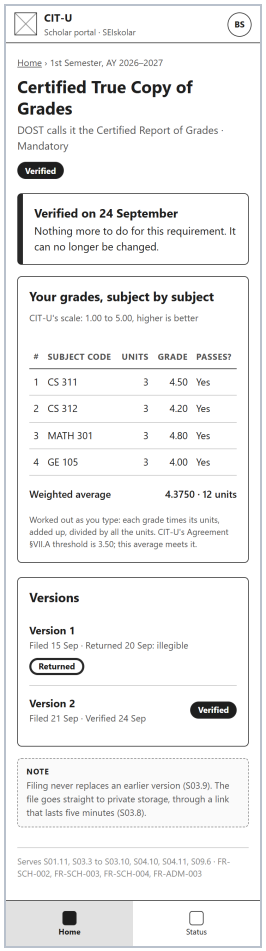

Phone · 360 px

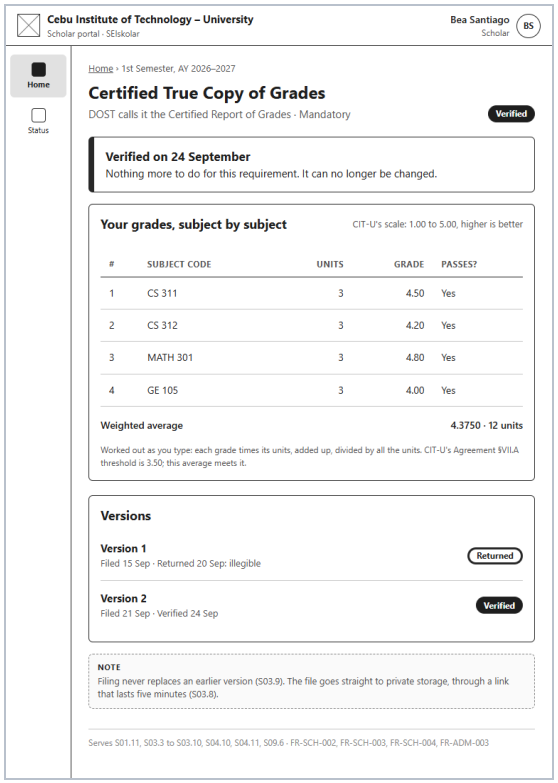

Tablet · 768 px

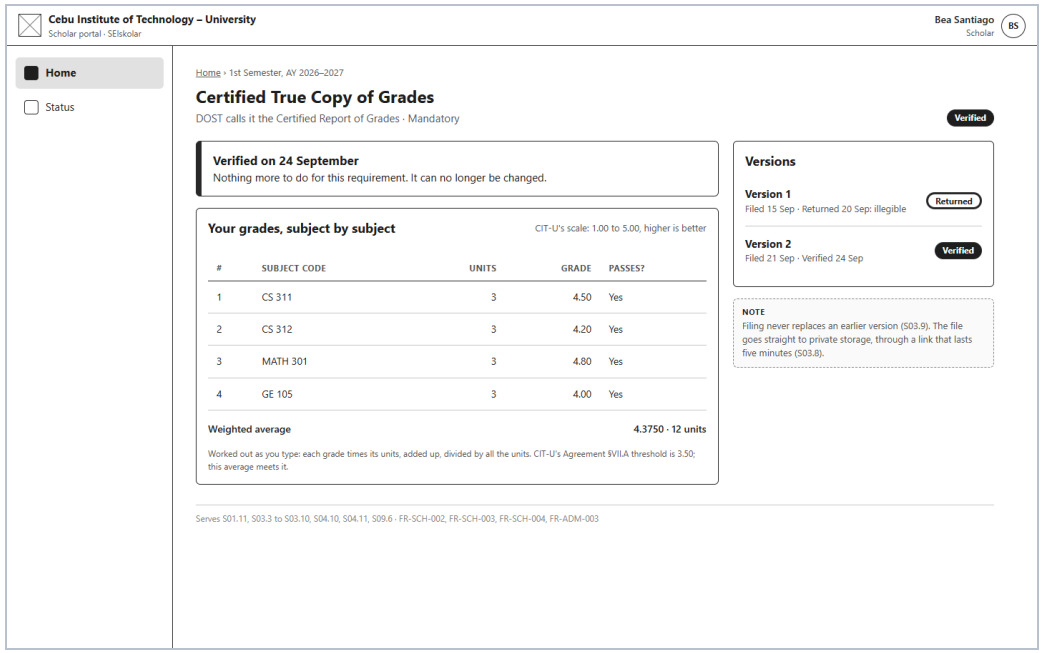

Desktop · 1440 px

Repository: `03-low-fidelity/scholar-requirement.html?state=verified` · Figma: page 03 Low-fidelity, section scholar-requirement.html, frames `scholar-requirement--verified.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 6 OF 29

Scholar: stipend and tuition

Owner: Althea Maeve Kinaadman (@Tiamporado)

Serves S05.12, S05.13, S06.12, S07.9 · FR-REL-003, FR-TUI-003, FR-BEN-003 · Swimlanes 05, 06, 07 · Finished on page **94**

NOTE Three ways off the path (FR-REL-003): moved to a later batch, if not cleared by the deadline or taken off the list; the batch returned to the Regional Office; or removed by Central Office, with its reason. Nothing is forfeited.

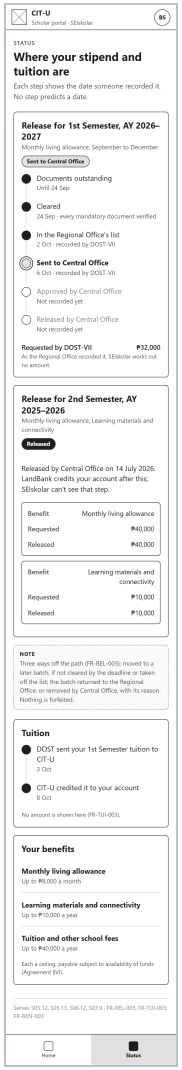

Phone · 360 px

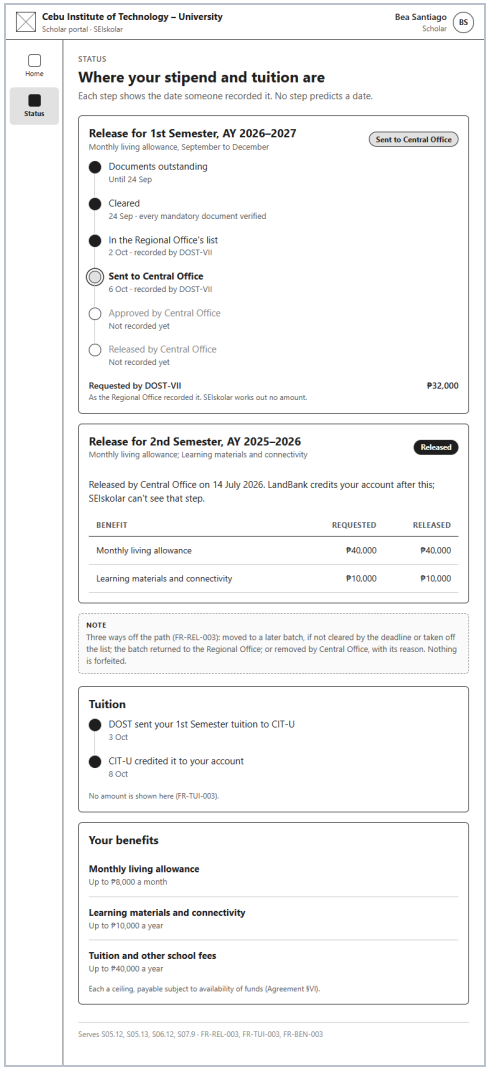

Tablet · 768 px

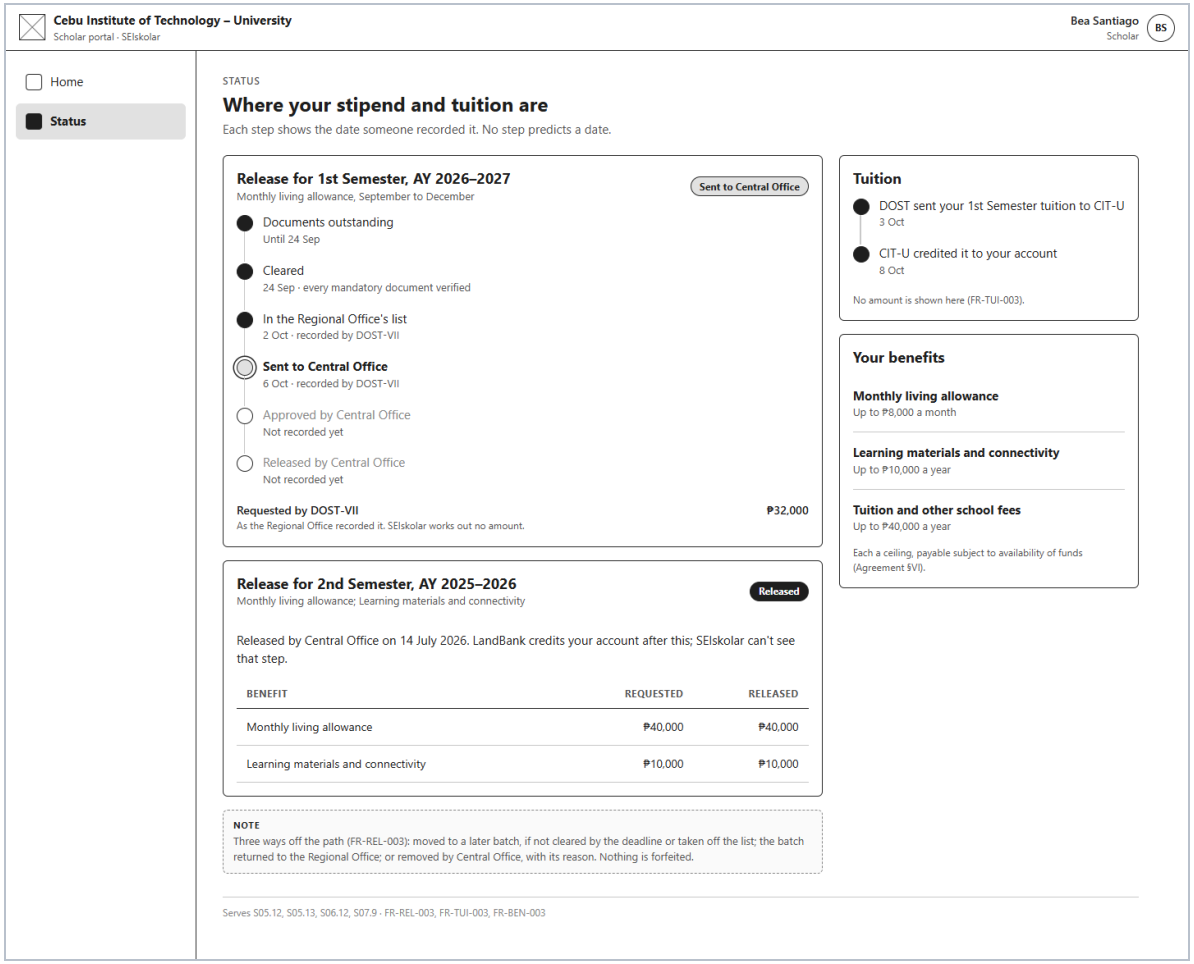

Desktop · 1440 px

Repository: `03-low-fidelity/scholar-status.html` · Figma: page 03 Low-fidelity, section scholar-status.html, frames `scholar-status.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 7 OF 29

Coordinator: home

Owner: Zedric Camilotes (@zedric-git)

Serves S04.12 · FR-MON-001 · Swimlane 04 · Finished on page **95**

NOTE Counts only, for this school and this term (FR-MON-001). A coordinator sees no other school's figures. They change as DOST-VII checks filings.

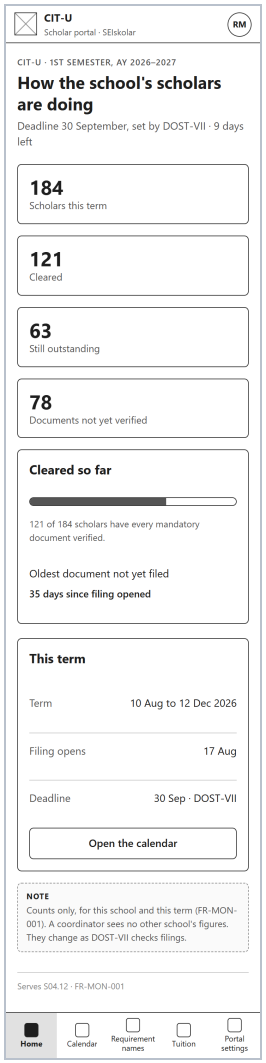

Phone · 360 px

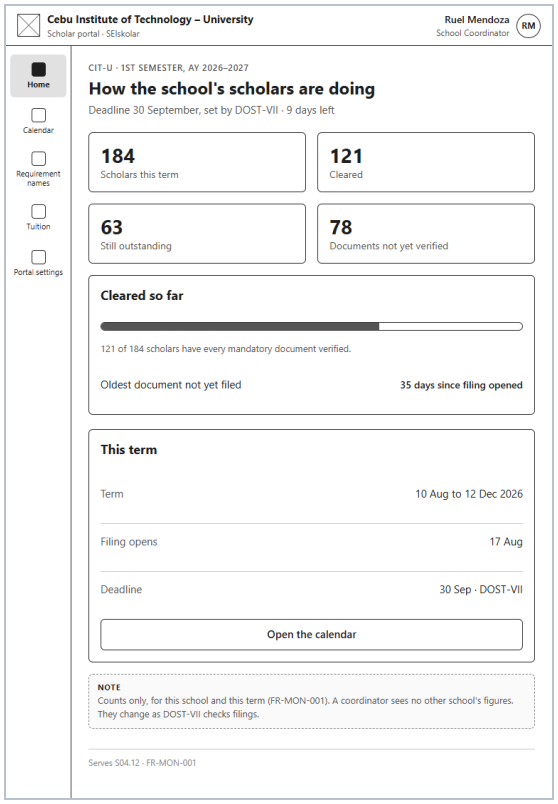

Tablet · 768 px

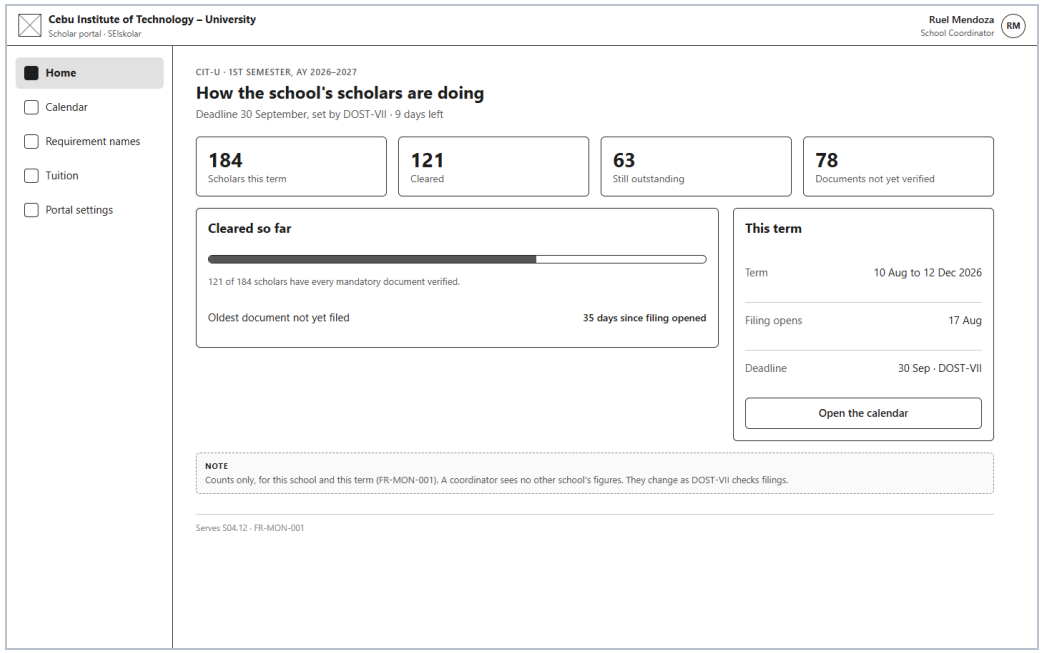

Desktop · 1440 px

Repository: `03-low-fidelity/coordinator-home.html` · Figma: page 03 Low-fidelity, section coordinator-home.html, frames `coordinator-home.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 8 OF 29

Owner: Dorothy Biatriz Capao (@dbeenutsz)

Coordinator: academic calendar

Serves S02.1, S02.2, S02.4 · SRS §1.3; §4.1 "Configure Campus Terms" · Swimlane 02 · Finished on page **96**

NOTE The coordinator runs the calendar; each term's checklist and deadline are the Regional Office's (SRS §1.3, S02.5 and S02.6).

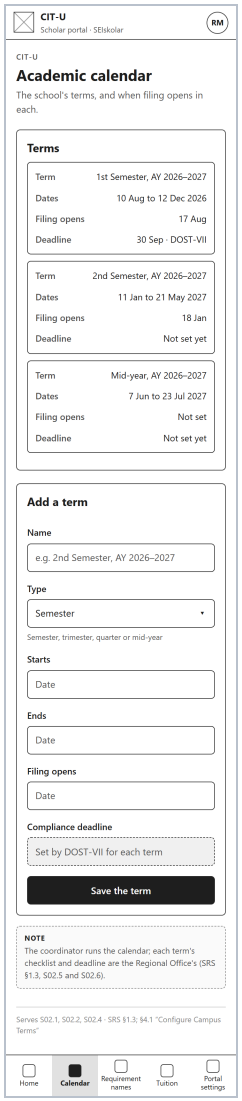

Phone · 360 px

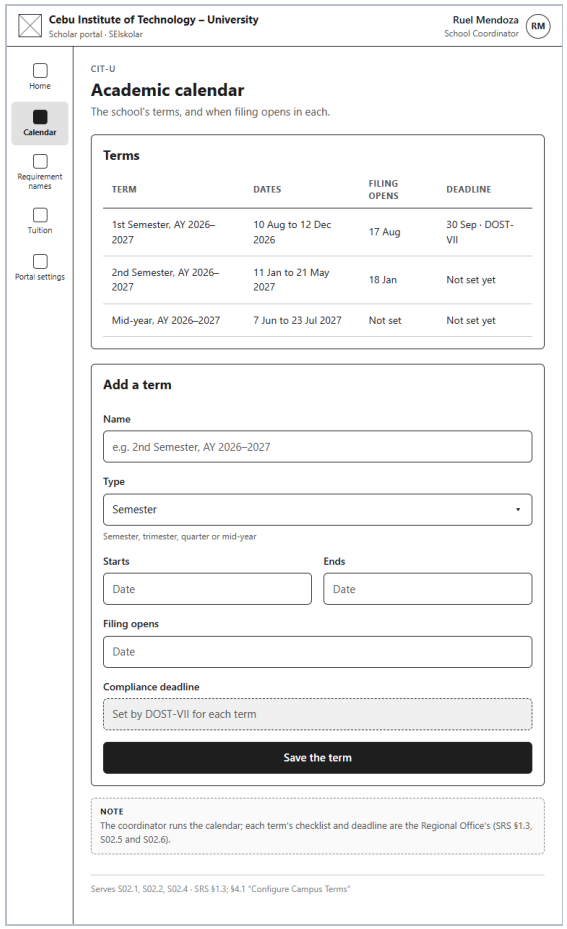

Tablet · 768 px

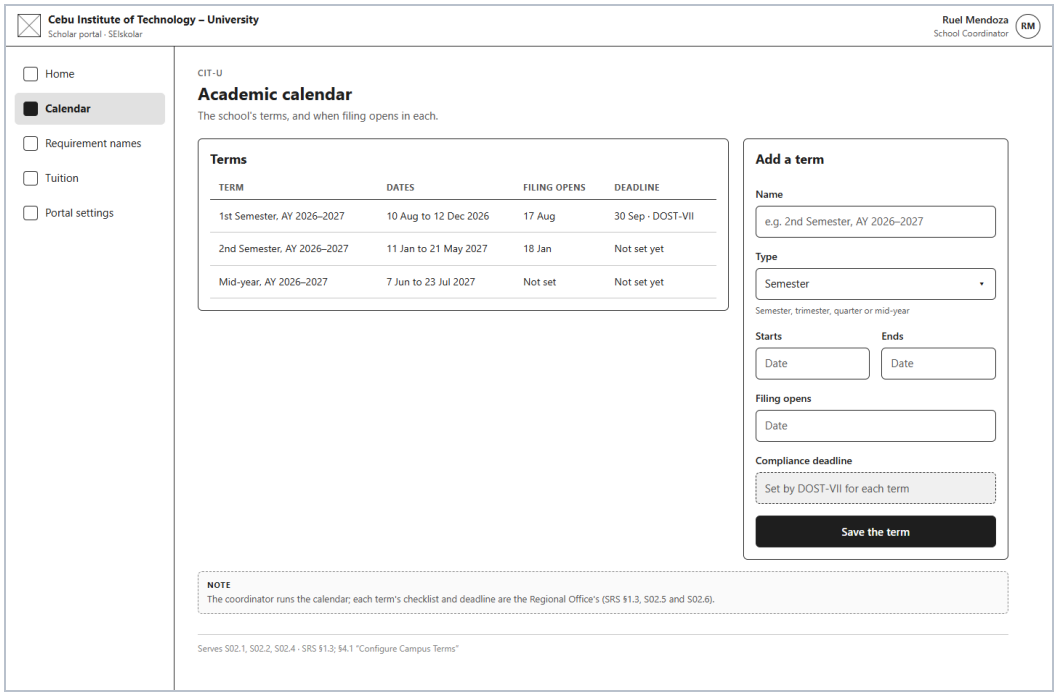

Desktop · 1440 px

Repository: `03-low-fidelity/coordinator-terms.html` · Figma: page 03 Low-fidelity, section coordinator-terms.html, frames `coordinator-terms.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 9 OF 29

Owner: Dorothy Biatriz Capao (@dbeenutsz)

Coordinator: requirement names

Serves S02.3, S02.4 · SRS §4.1 "Customize Requirement Labels" · Swimlane 02 · Finished on page **97**

NOTE Only the name and the instructions change here. DOST's list of requirements, and which ones a term needs, stay DOST's (S02.3, S02.5).

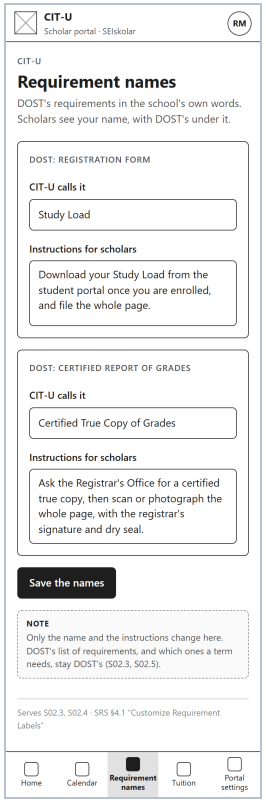

Phone · 360 px

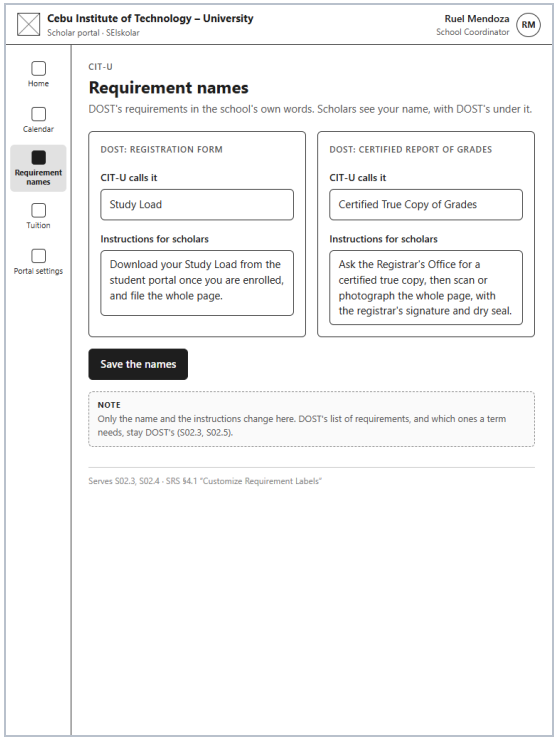

Tablet · 768 px

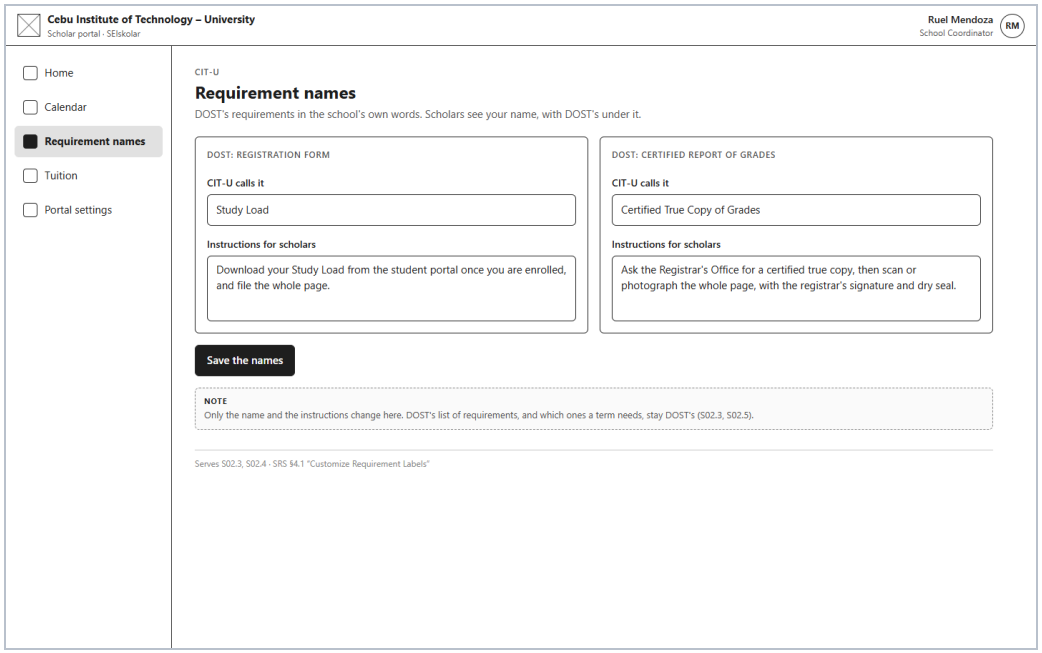

Desktop · 1440 px

Repository: `03-low-fidelity/coordinator-requirement-names.html` · Figma: page 03 Low-fidelity, section coordinator-requirement-names.html, frames `coordinator-requirement-names.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 10 OF 29

Coordinator: tuition remittances

Check · state 1 of 2

Owner: Althea Maeve Kinaadman (@Tiamporado)

Serves S06.3 to S06.11, S06.13 · FR-TUI-002 · Swimlane 06 · Finished on page **98**

NOTE Disputing needs a reason. DOST-VII then corrects the remittance and sends it again (S06.4, S06.5).

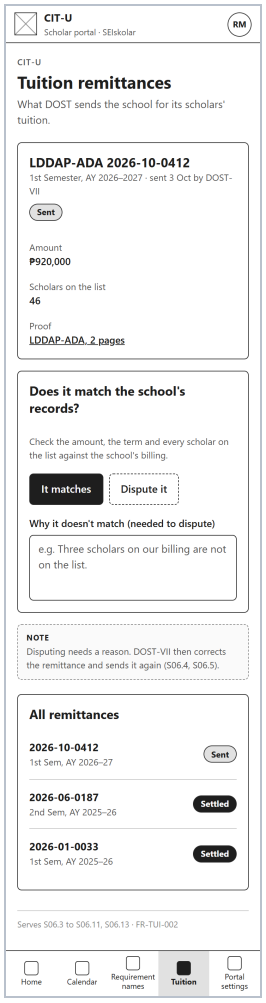

Phone · 360 px

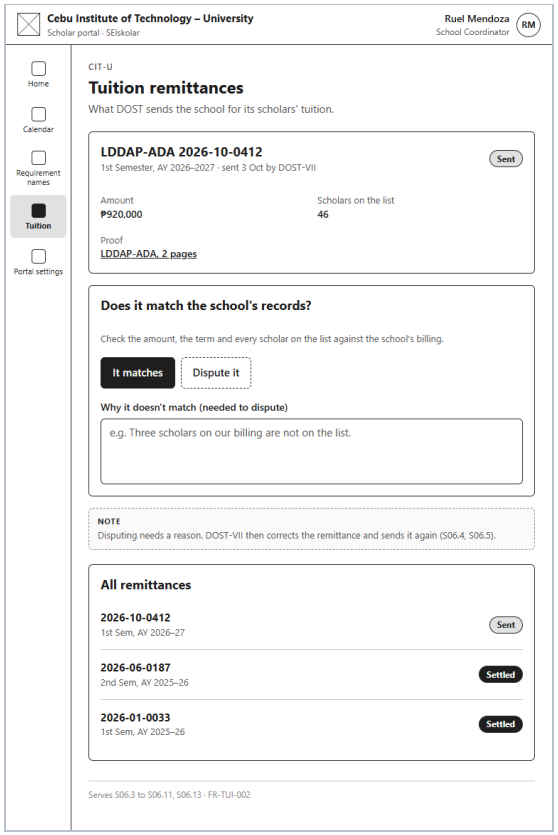

Tablet · 768 px

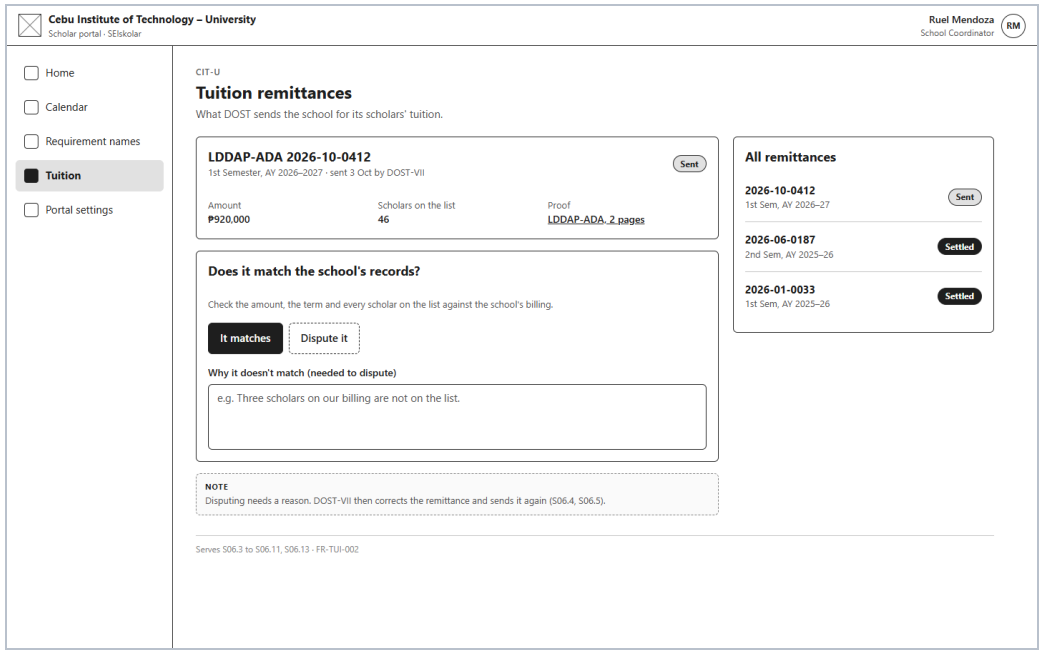

Desktop · 1440 px

Repository: `03-low-fidelity/coordinator-remittances.html?state=check` · Figma: page 03 Low-fidelity, section coordinator-remittances.html, frames `coordinator-remittances--check.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 10 OF 29

Coordinator: tuition remittances

Crediting · state 2 of 2

Owner: Althea Maeve Kinaadman (@Tiamporado)

Serves S06.3 to S06.11, S06.13 · FR-TUI-002 · Swimlane 06 · Finished on page 99

NOTE Once every scholar on the list is credited, the remittance is settled (S06.9). A mismatch found now can still be disputed (S06.13).

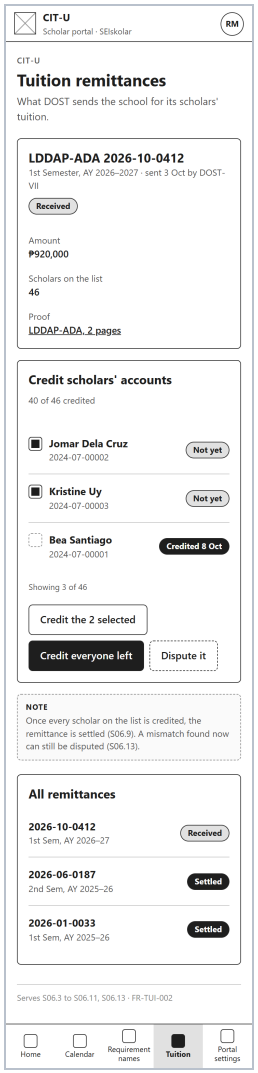

Phone · 360 px

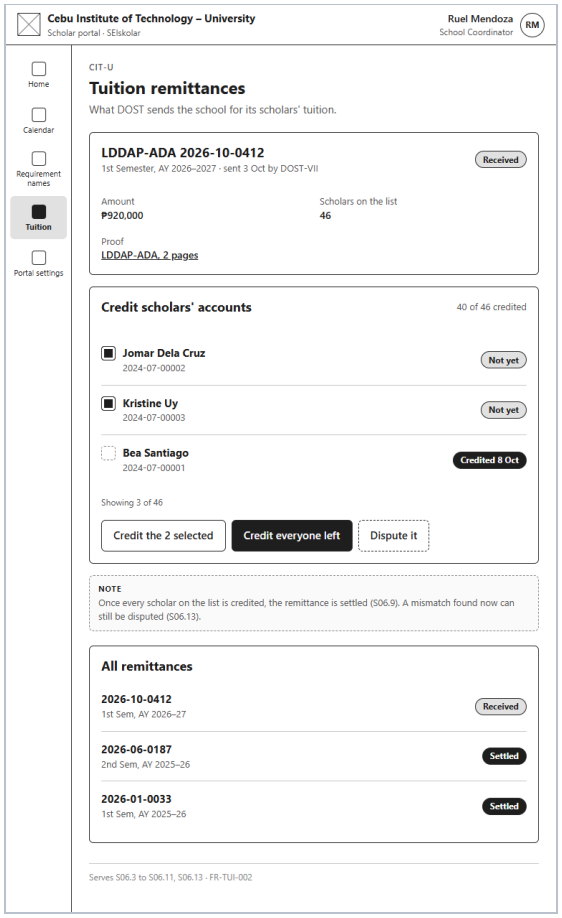

Tablet · 768 px

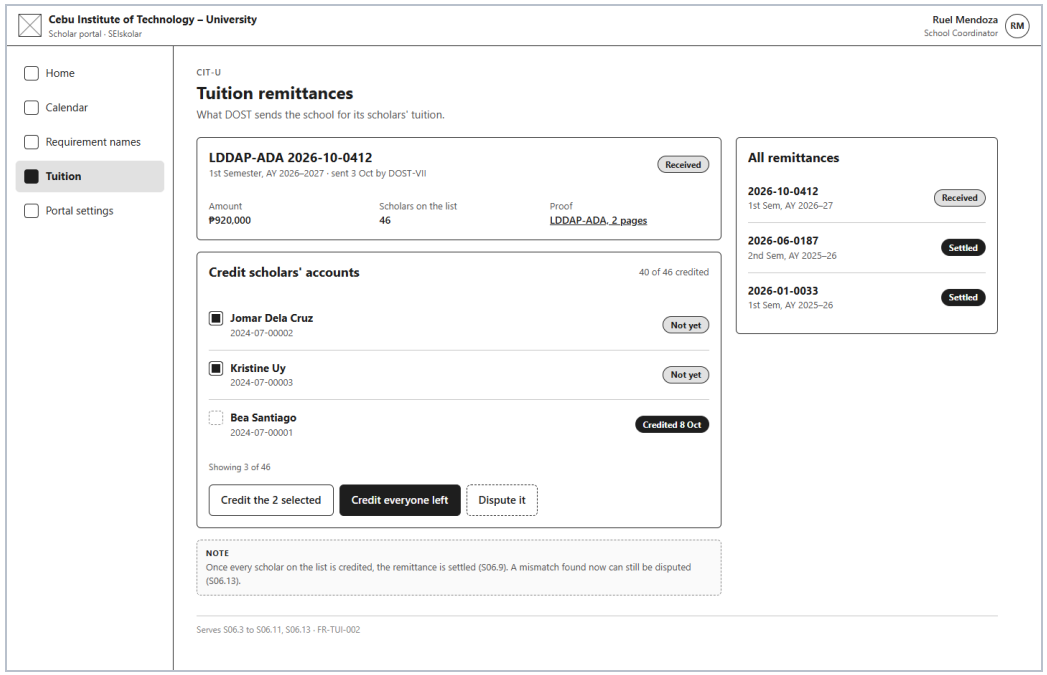

Desktop · 1440 px

Repository: `03-low-fidelity/coordinator-remittances.html?state=crediting` · Figma: page 03 Low-fidelity, section coordinator-remittances.html, frames `coordinator-remittances--crediting.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 11 OF 29

Coordinator: portal settings

Owner: Althea Maeve Kinaadman (@Tiamporado)

Serves S09.1 to S09.3 · FR-ADM-003 · Swimlane 09 · Finished on page **100**

NOTE With these, a grade line can show that it passes, and a term's average whether it meets the threshold. SEIskolar never declares a scholar's standing (FR-ADM-003).

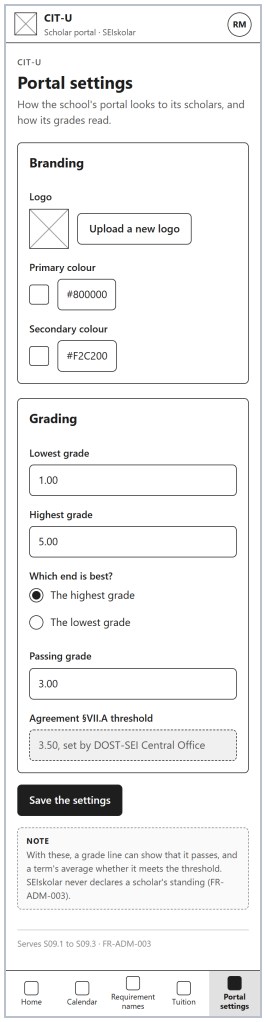

Phone · 360 px

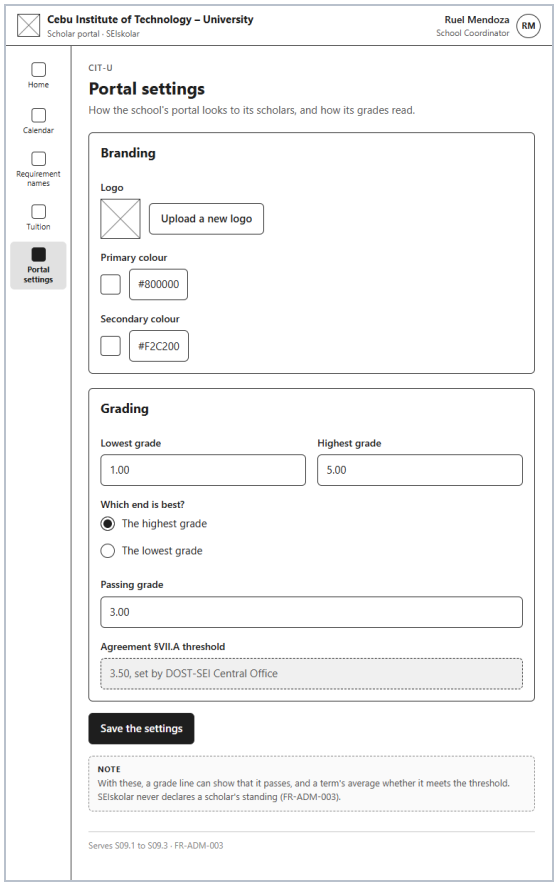

Tablet · 768 px

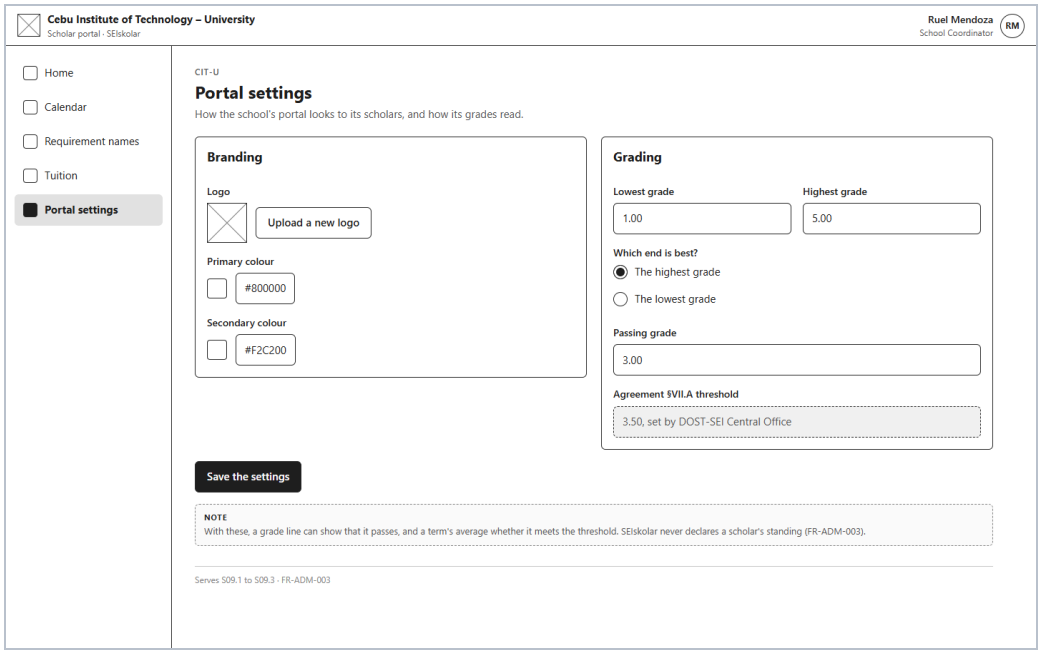

Desktop · 1440 px

Repository: `03-low-fidelity/coordinator-portal-settings.html` · Figma: page 03 Low-fidelity, section coordinator-portal-settings.html, frames `coordinator-portal-settings.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 12 OF 29

Regional Office: home

Owner: Zedric Camilotes (@zedric-git)

Serves S04.1 · FR-MON-001 · Swimlane 04 · Finished on page **101**

NOTE Counts only, for DOST-VII's schools (FR-MON-001). Each school keeps its own calendar, so each row is that school's current term (S02.1). A school past its deadline stays on the list.

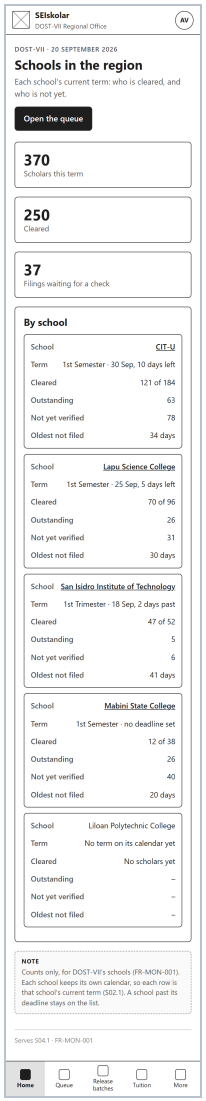

Phone · 360 px

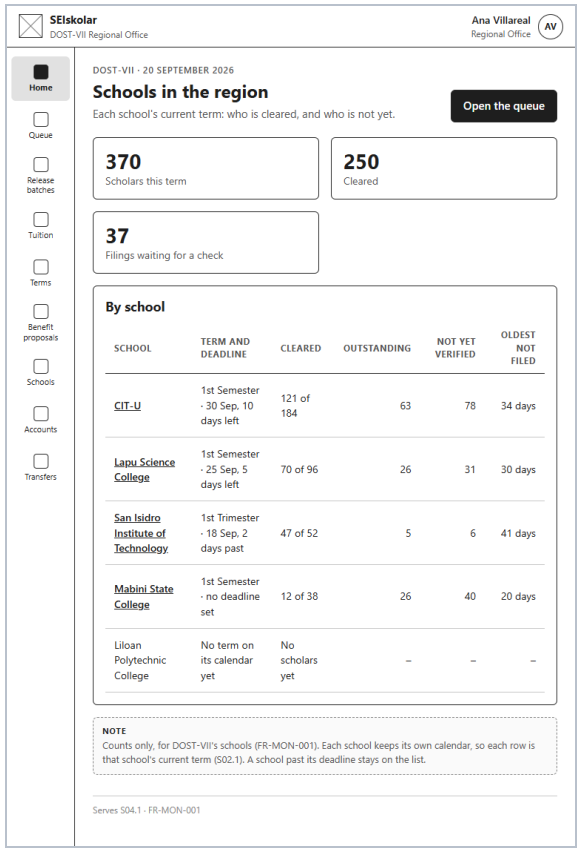

Tablet · 768 px

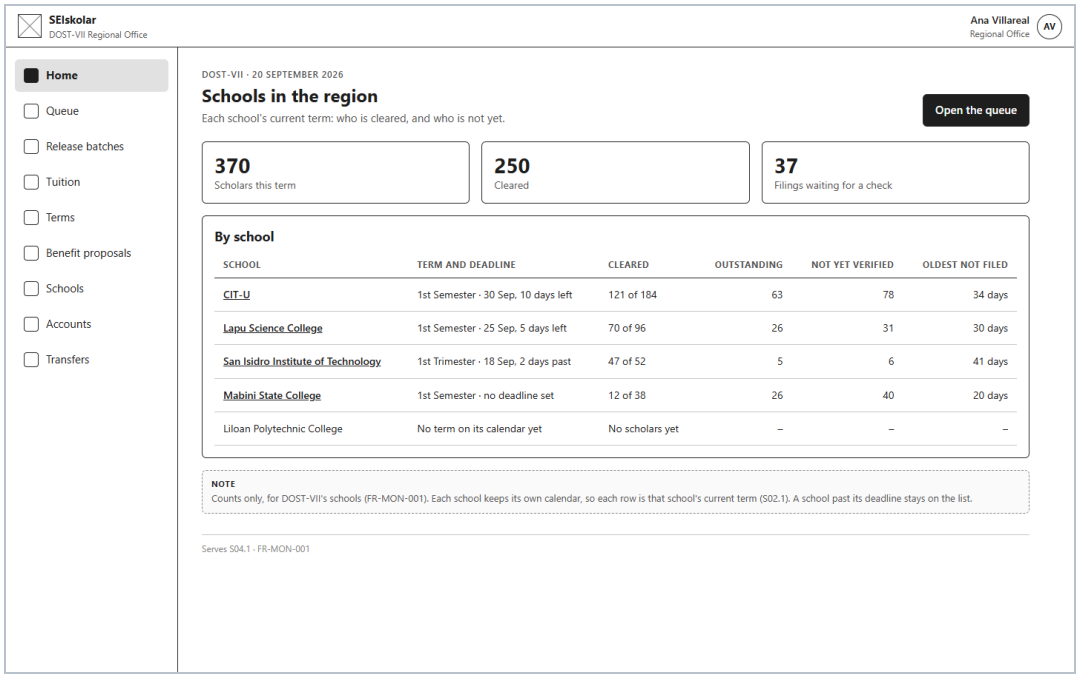

Desktop · 1440 px

Repository: `03-low-fidelity/regional-home.html` · Figma: page 03 Low-fidelity, section regional-home.html, frames `regional-home.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 13 OF 29

Regional Office: checklist and deadline

Owner: Zedric Camilotes (@zedric-git)

Serves S02.5 to S02.7 · SRS §1.3; FR-SCH-001 · Swimlane 02 · Finished on page **102**

NOTE The checklist is chosen from DOST's requirements, and each shows in the school's own words (S02.3). Without a deadline, scholars see the checklist with no countdown (S02.11).

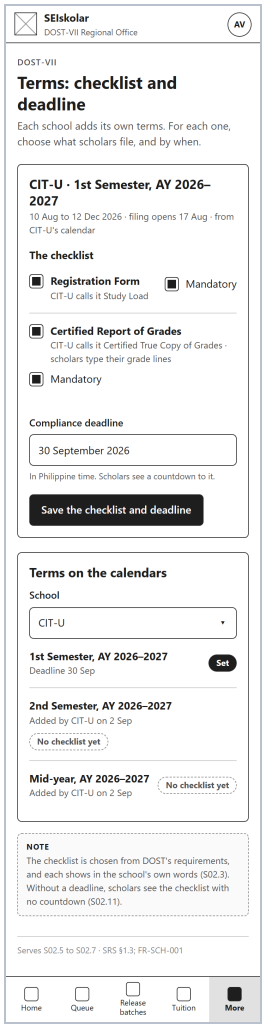

Phone · 360 px

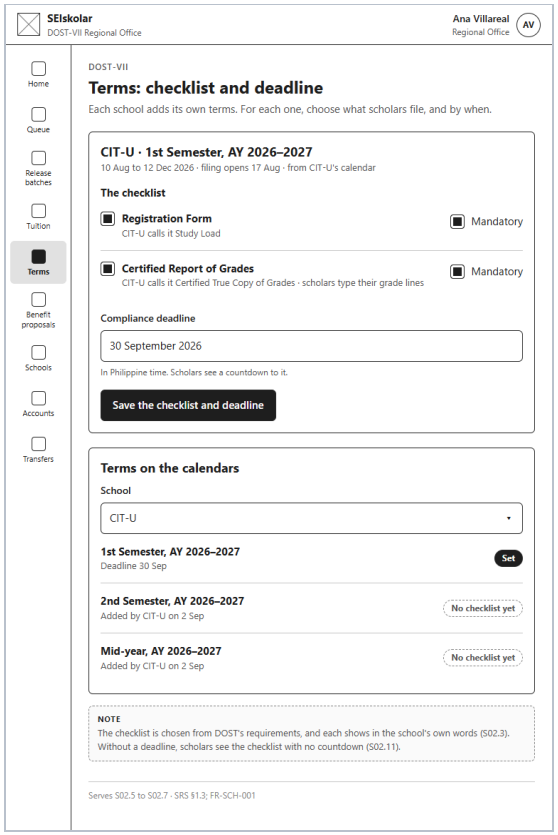

Tablet · 768 px

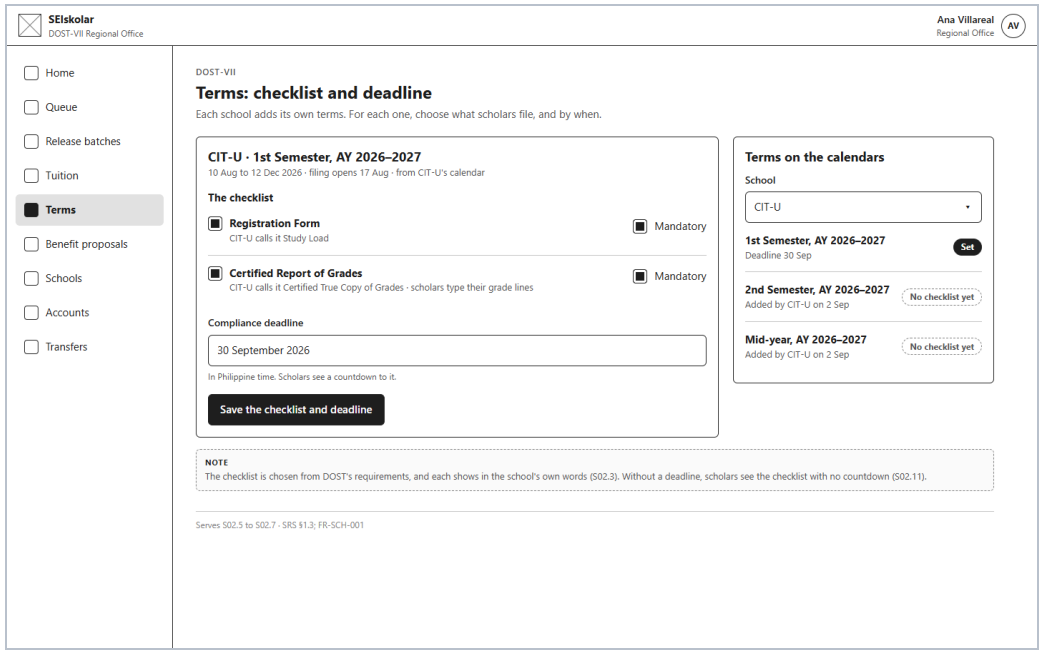

Desktop · 1440 px

Repository: `03-low-fidelity/regional-term-setup.html` · Figma: page 03 Low-fidelity, section regional-term-setup.html, frames `regional-term-setup.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 14 OF 29

Regional Office: queue

Owner: Zedric Camilotes (@zedric-git)

Serves S04.2, S04.3 · FR-CHK-001, FR-CHK-002 · Swimlane 04 · Finished on page **103**

NOTE A filing past its school's deadline stays in the queue, with how many days past: checking never waits for the deadline, and nothing is hidden after it (FR-CHK-001). Claiming a filing stops anyone else deciding it (FR-CHK-002).

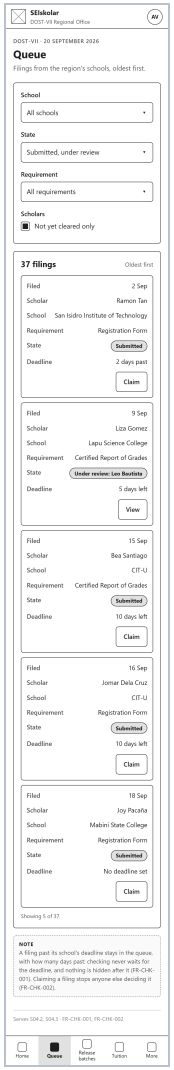

Phone · 360 px

Tablet · 768 px

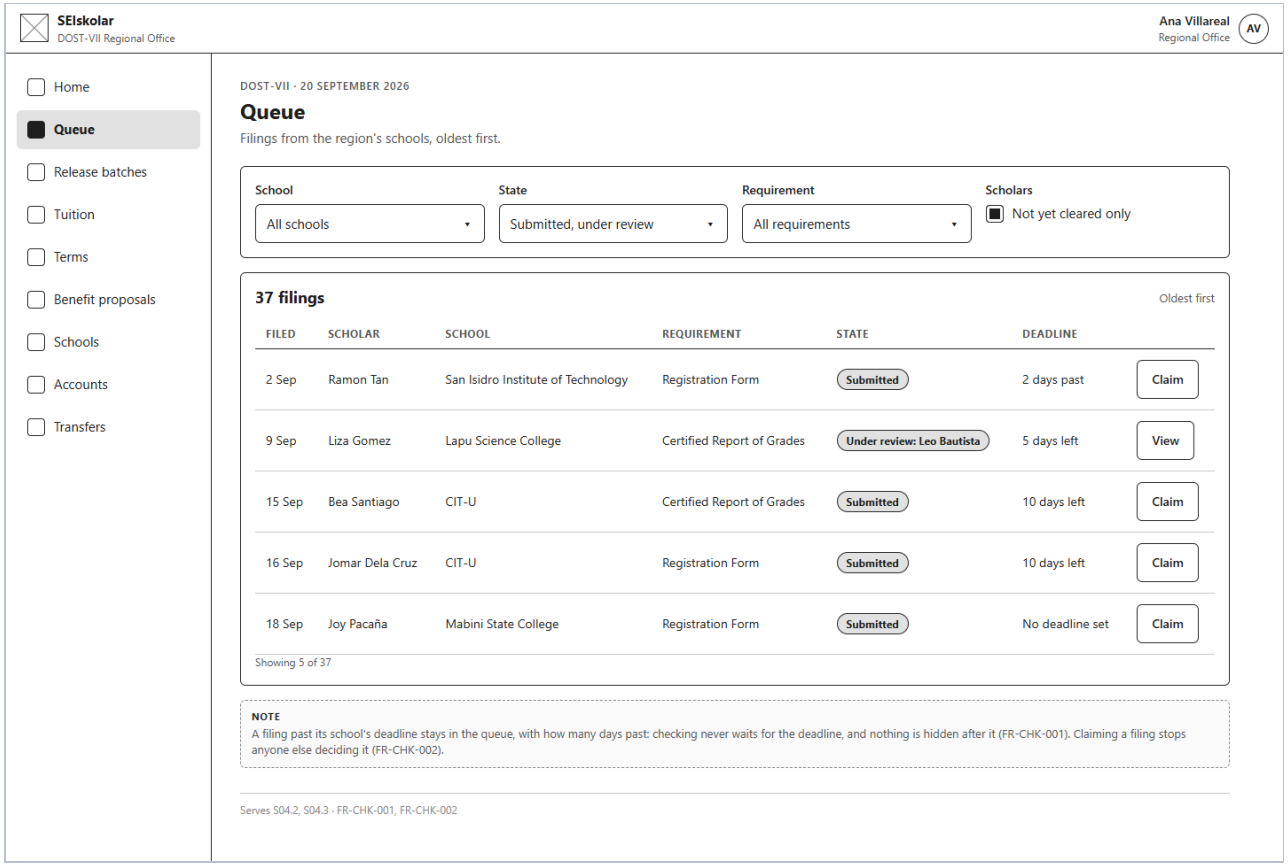

Desktop · 1440 px

Repository: `03-low-fidelity/regional-queue.html` · Figma: page 03 Low-fidelity, section regional-queue.html, frames `regional-queue.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 15 OF 29

Regional Office: check a filing

Unclaimed · state 1 of 3

Owner: Zedric Camilotes (@zedric-git)

Serves S04.3 to S04.9 · FR-CHK-002, FR-CHK-003, FR-CHK-004 · Swimlane 04 · Finished on page **104**

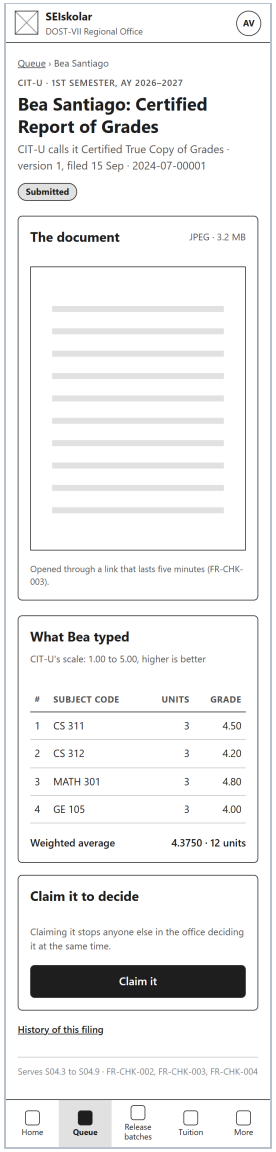

Phone · 360 px

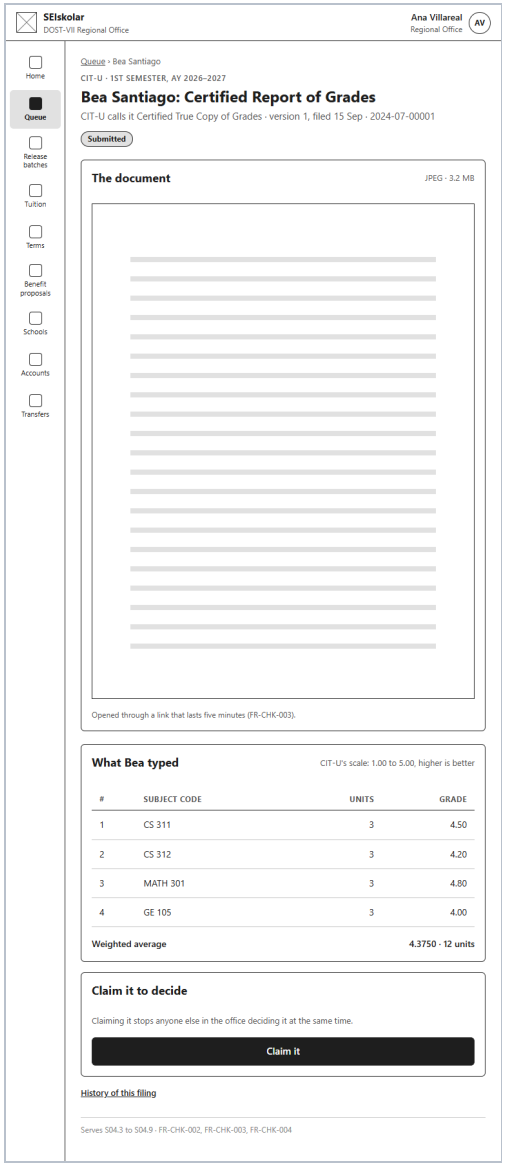

Tablet · 768 px

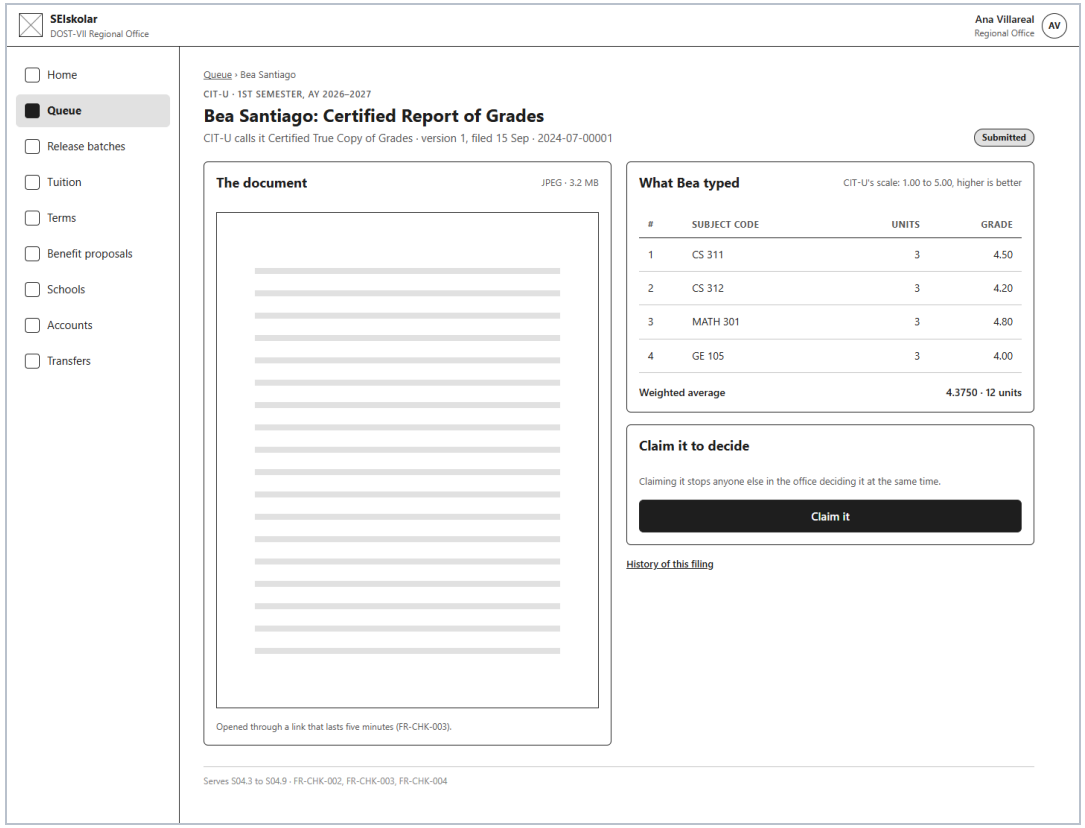

Desktop · 1440 px

Repository: `03-low-fidelity/regional-review.html?state=unclaimed` · Figma: page 03 Low-fidelity, section regional-review.html, frames `regional-review--unclaimed.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 15 OF 29

Regional Office: check a filing

Claimed · state 2 of 3

Owner: Zedric Camilotes (@zedric-git)

Serves S04.3 to S04.9 · FR-CHK-002, FR-CHK-003, FR-CHK-004 · Swimlane 04 · Finished on page **105**

NOTE Verified is final: no one can change it afterwards (S04.7). Releasing the claim puts the filing back in the queue for anyone (S04.6).

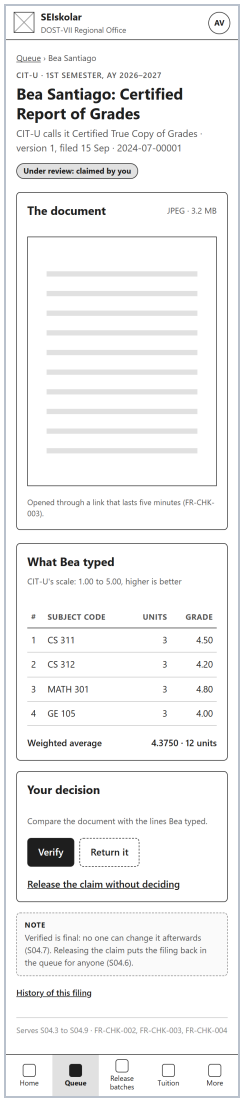

Phone · 360 px

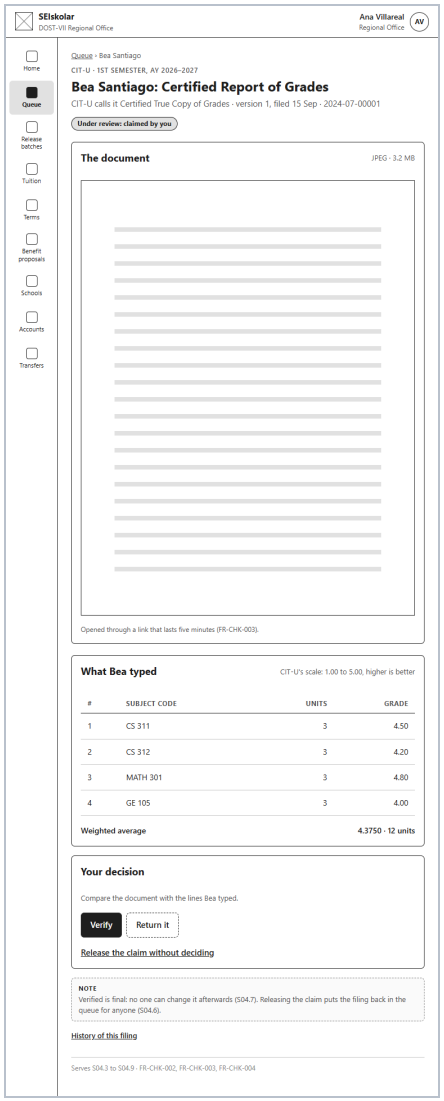

Tablet · 768 px

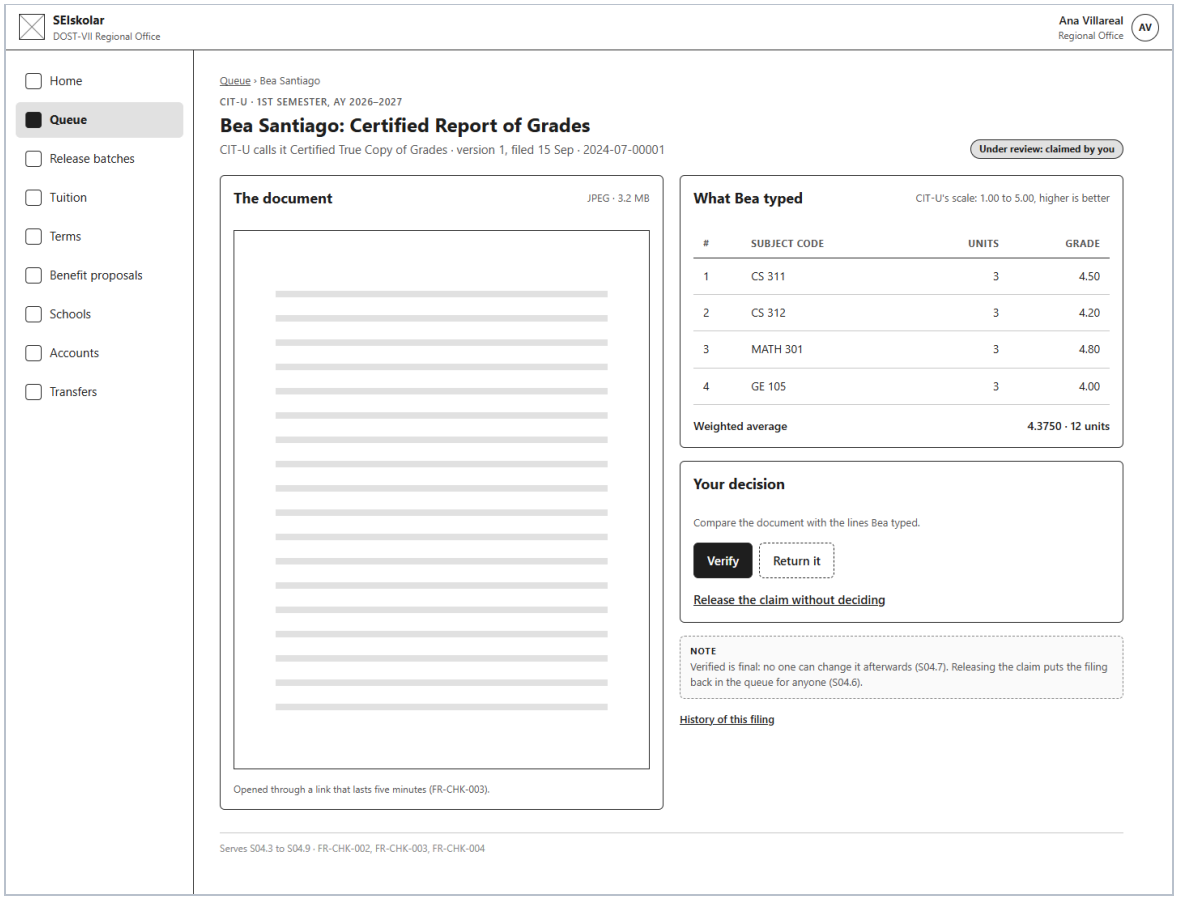

Desktop · 1440 px

Repository: `03-low-fidelity/regional-review.html?state=claimed` · Figma: page 03 Low-fidelity, section regional-review.html, frames `regional-review--claimed.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 15 OF 29

Regional Office: check a filing

Returning · state 3 of 3

Owner: Zedric Camilotes (@zedric-git)

Serves S04.3 to S04.9 · FR-CHK-002, FR-CHK-003, FR-CHK-004 · Swimlane 04 · Finished on page **106**

NOTE One of the eight reasons in FR-CHK-004. Bea sees the reason and the remarks, and files a corrected copy as version 2; version 1 stays on record (S04.11).

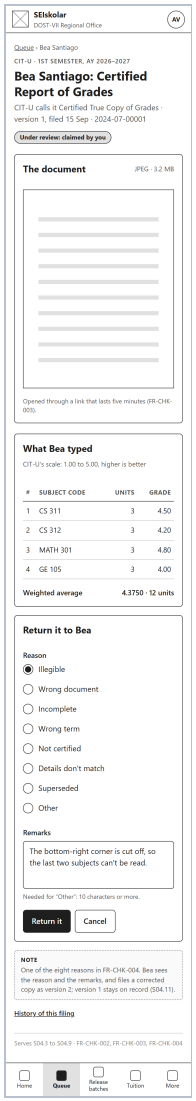

Phone · 360 px

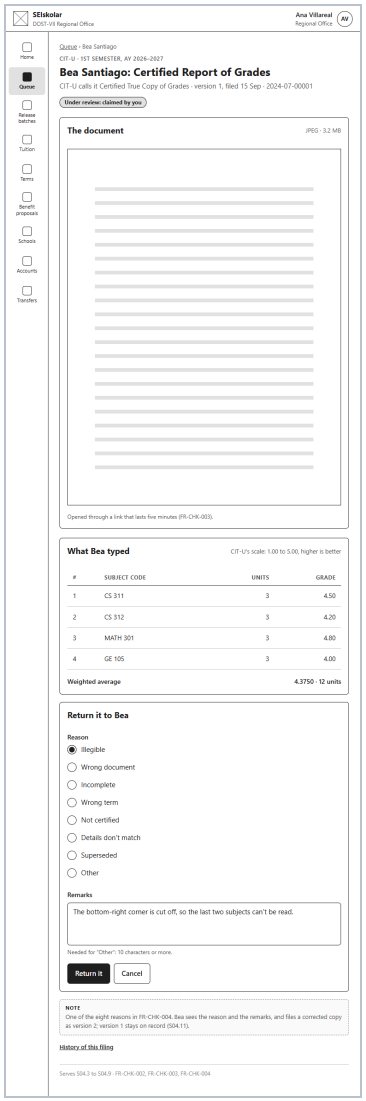

Tablet · 768 px

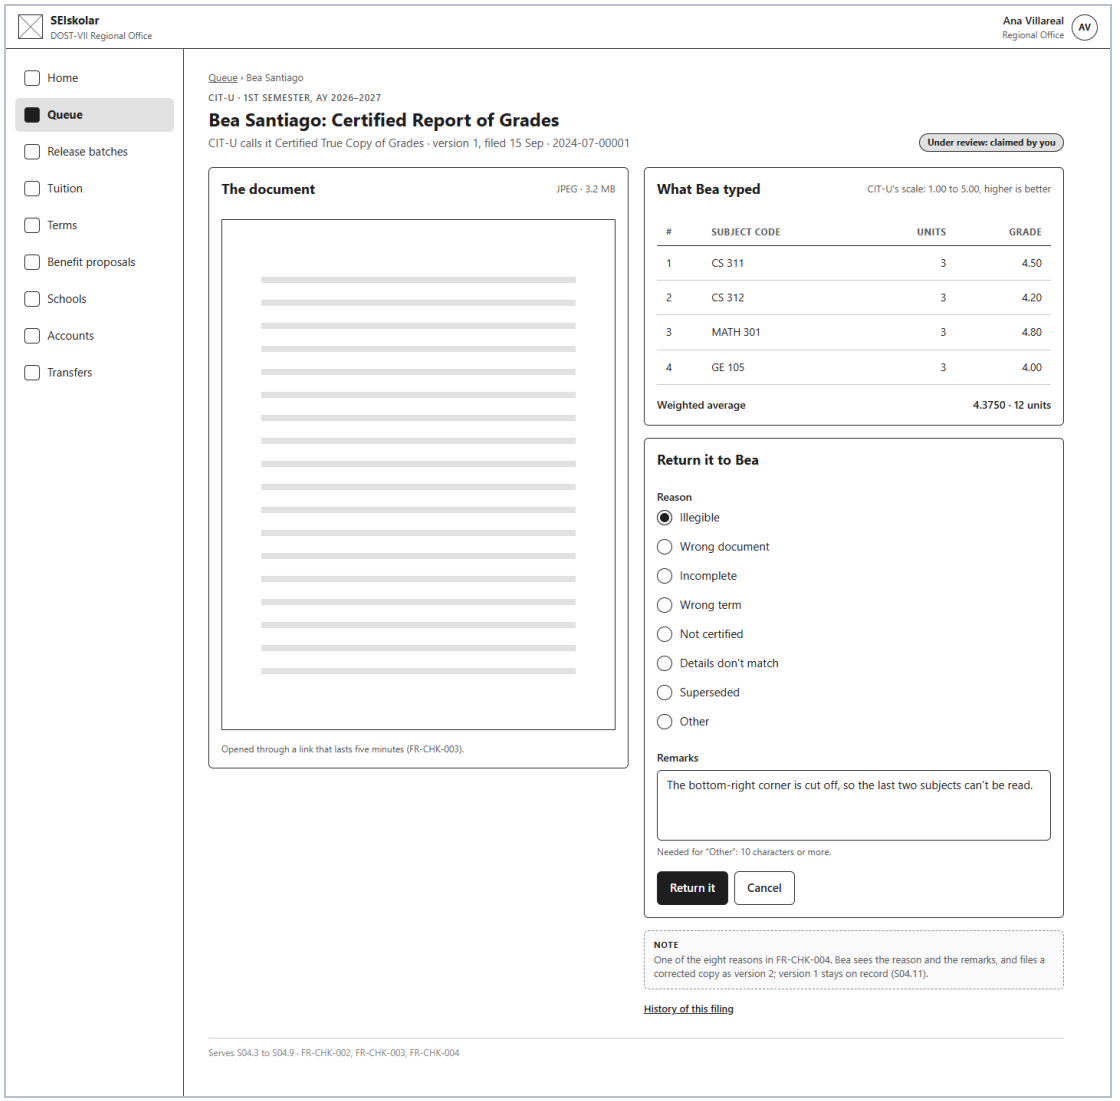

Desktop · 1440 px

Repository: `03-low-fidelity/regional-review.html?state=returning` · Figma: page 03 Low-fidelity, section regional-review.html, frames `regional-review--returning.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 16 OF 29

Regional Office: release batches

Draft · state 1 of 2

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Serves S05.1 to S05.5, S05.8, S05.13 · FR-REL-001 · Swimlane 05 · Finished on page **107**

NOTE SEIskolar offers only cleared scholars and works out no amount: each one is typed here, and nothing is added up (FR-REL-001). A scholar taken off moves to a later batch, with the reason, and loses nothing (S05.13).

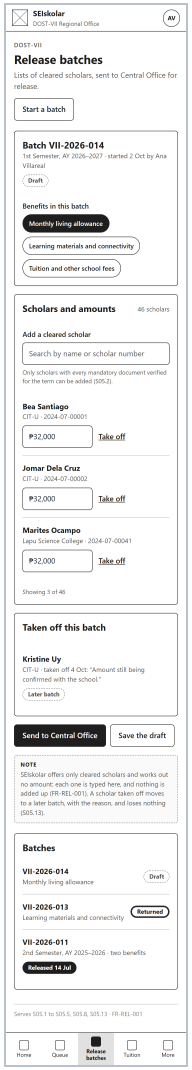

Phone · 360 px

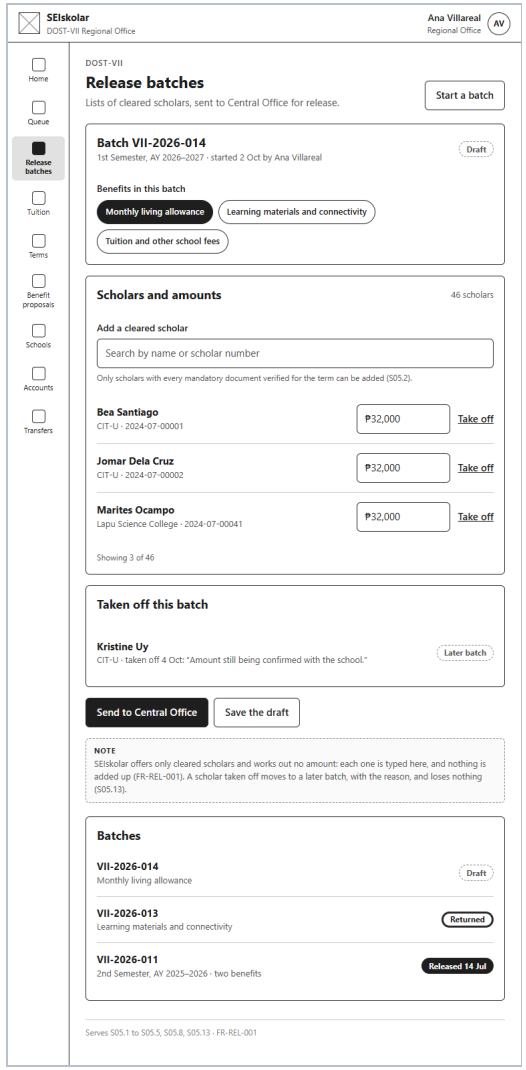

Tablet · 768 px

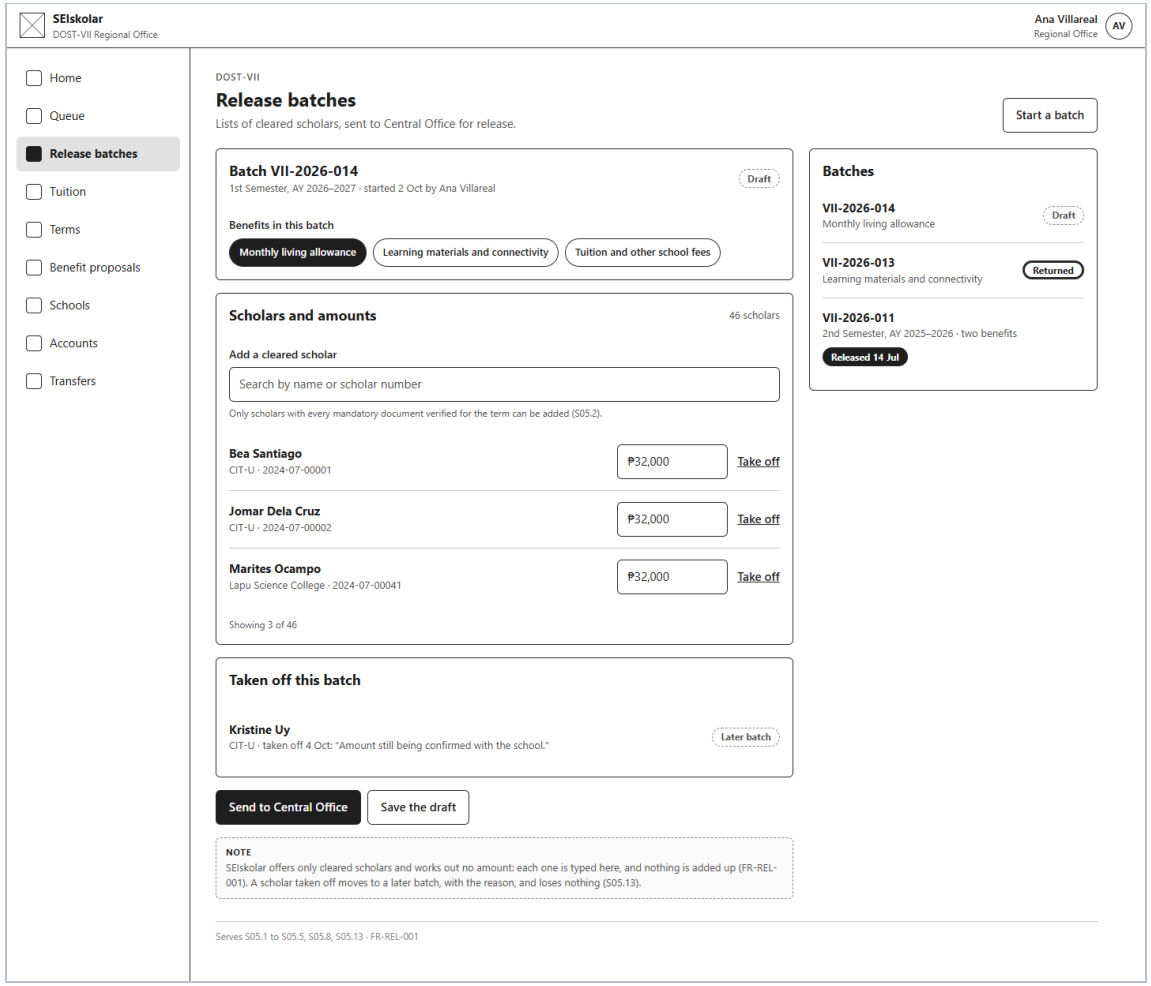

Desktop · 1440 px

Repository: `03-low-fidelity/regional-release-batch.html?state=draft` · Figma: page 03 Low-fidelity, section regional-release-batch.html, frames `regional-release-batch--draft.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 16 OF 29

Regional Office: release batches

Returned · state 2 of 2

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Serves S05.1 to S05.5, S05.8, S05.13 · FR-REL-001 · Swimlane 05 · Finished on page **108**

NOTE A returned batch is a draft again: correct it, and send it again (S05.8, FR-REL-001).

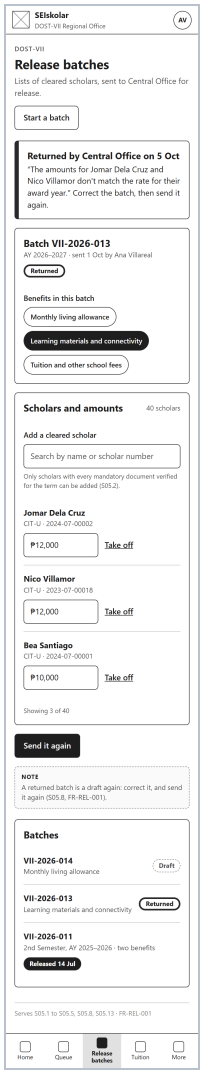

Phone · 360 px

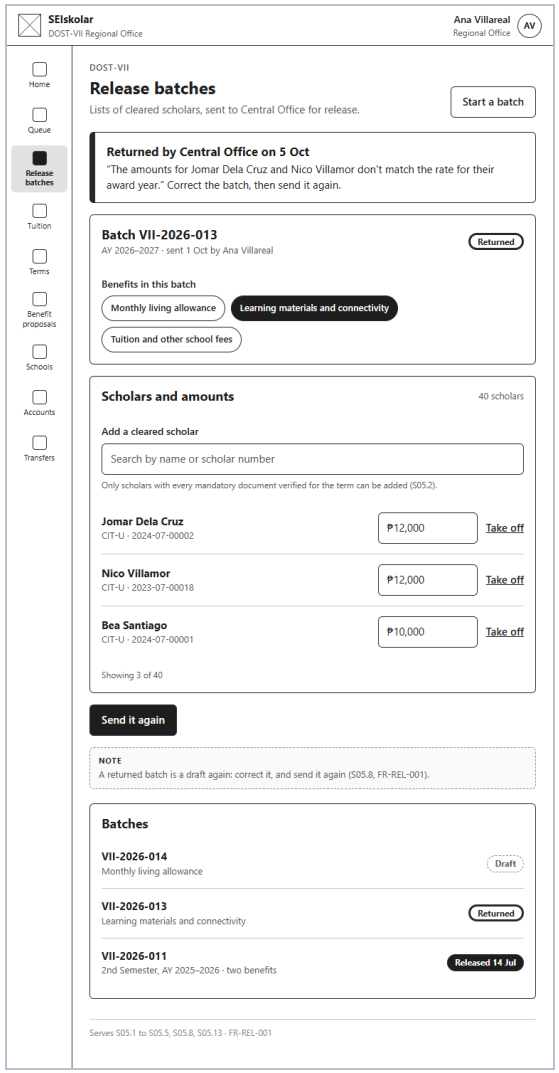

Tablet · 768 px

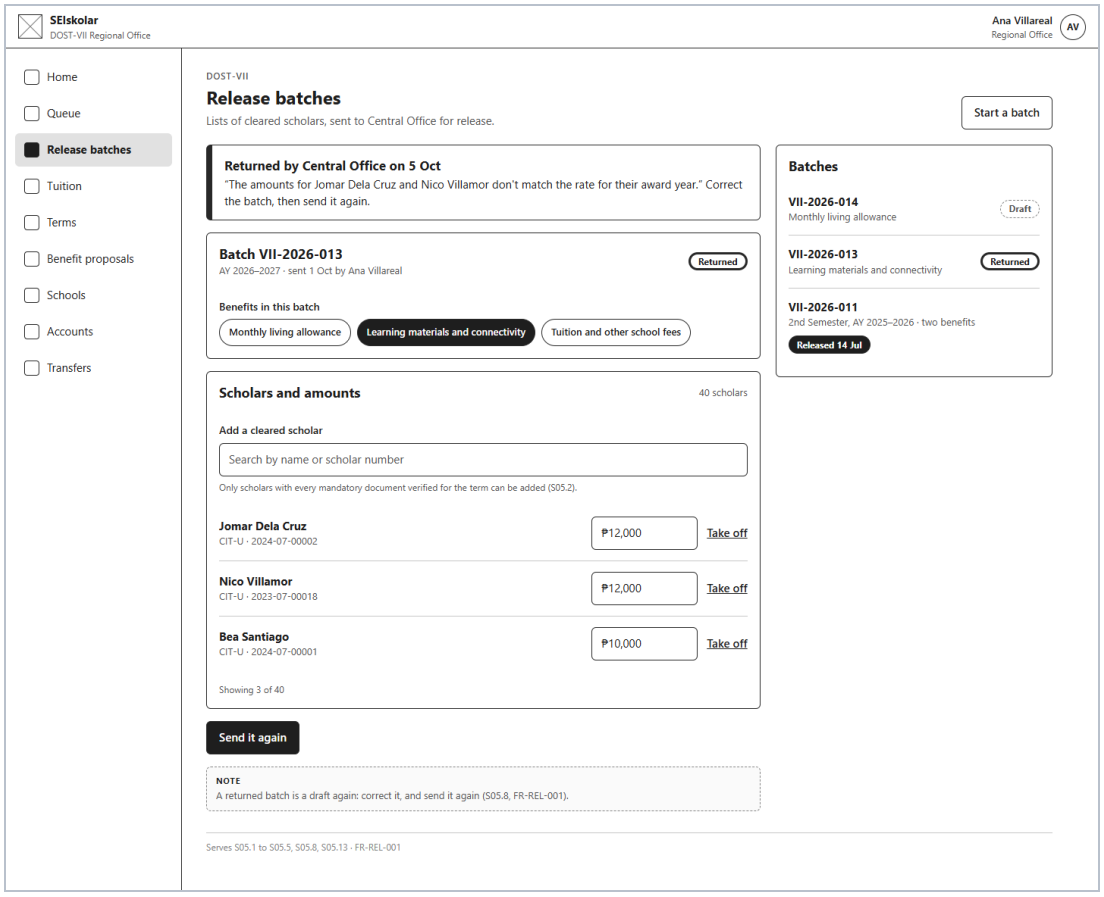

Desktop · 1440 px

Repository: `03-low-fidelity/regional-release-batch.html?state=returned` · Figma: page 03 Low-fidelity, section regional-release-batch.html, frames `regional-release-batch--returned.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 17 OF 29

Regional Office: tuition remittances

Record · state 1 of 2

Owner: Althea Maeve Kinaadman (@Tiamporado)

Serves S06.1, S06.2, S06.5, S06.13 · FR-TUI-001 · Swimlane 06 · Finished on page **109**

NOTE The proof goes to private storage (S06.2). CIT-U's coordinator checks the remittance against the school's own records, then credits each scholar (swimlane 06).

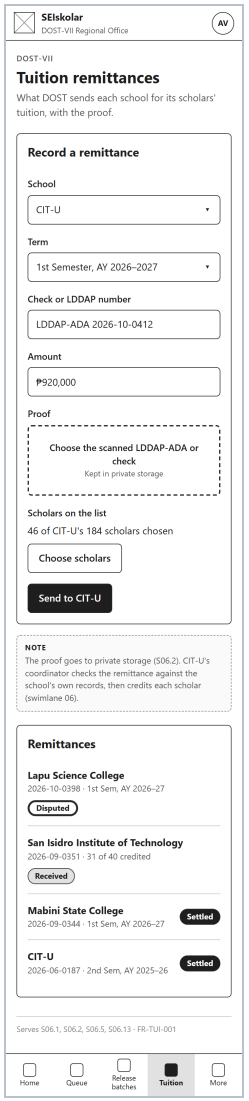

Phone · 360 px

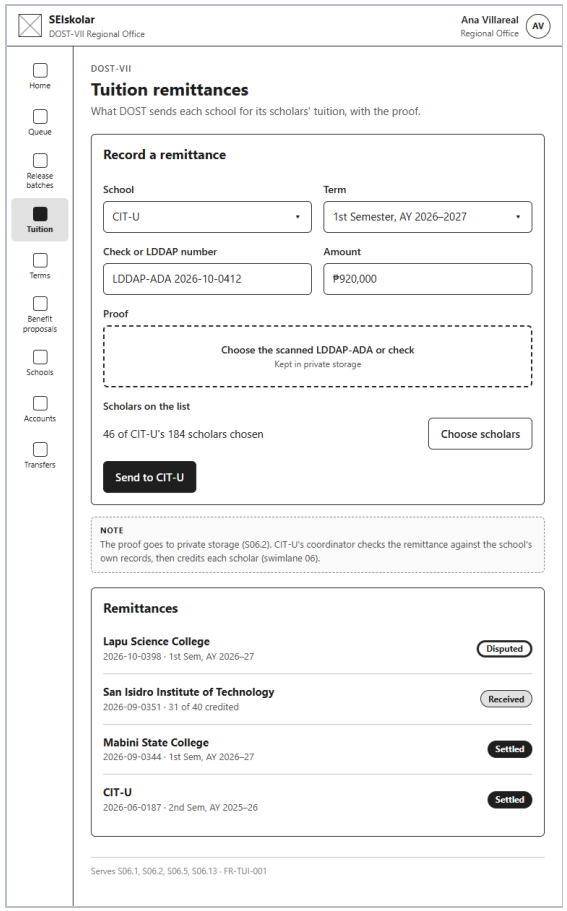

Tablet · 768 px

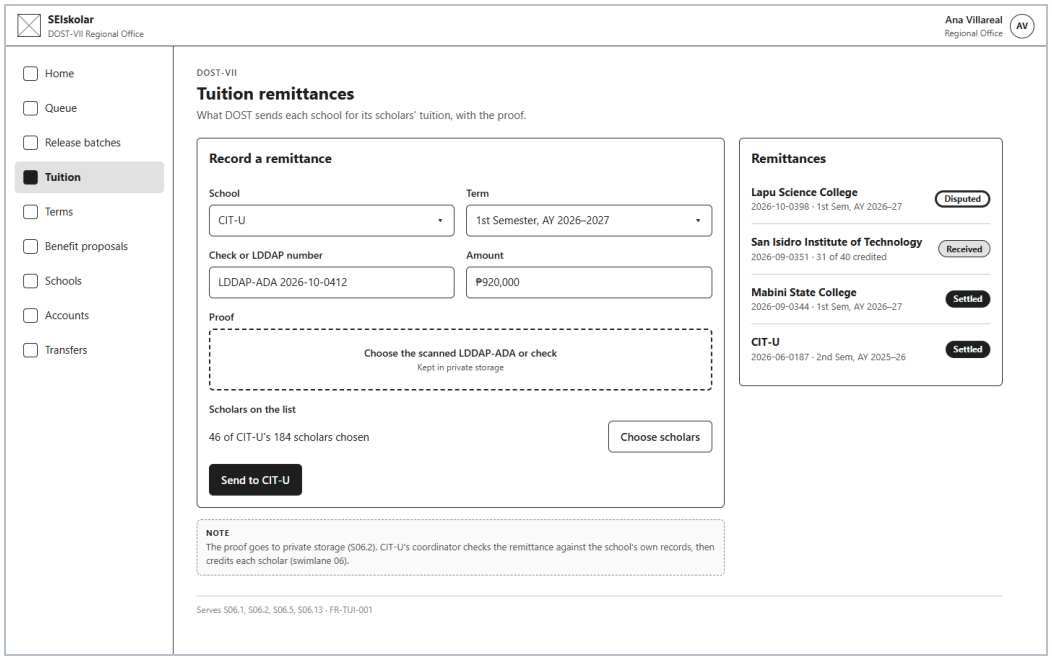

Desktop · 1440 px

Repository: `03-low-fidelity/regional-remittance.html?state=record` · Figma: page 03 Low-fidelity, section regional-remittance.html, frames `regional-remittance--record.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 17 OF 29

Regional Office: tuition remittances

Disputed · state 2 of 2

Owner: Althea Maeve Kinaadman (@Tiamporado)

Serves S06.1, S06.2, S06.5, S06.13 · FR-TUI-001 · Swimlane 06 · Finished on page **110**

NOTE A school disputes with a reason, before or during crediting (S06.5, S06.13). The corrected remittance goes back to the school as sent (FR-TUI-001).

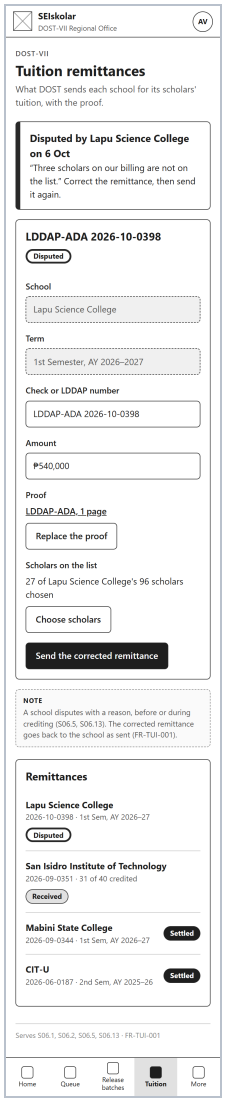

Phone · 360 px

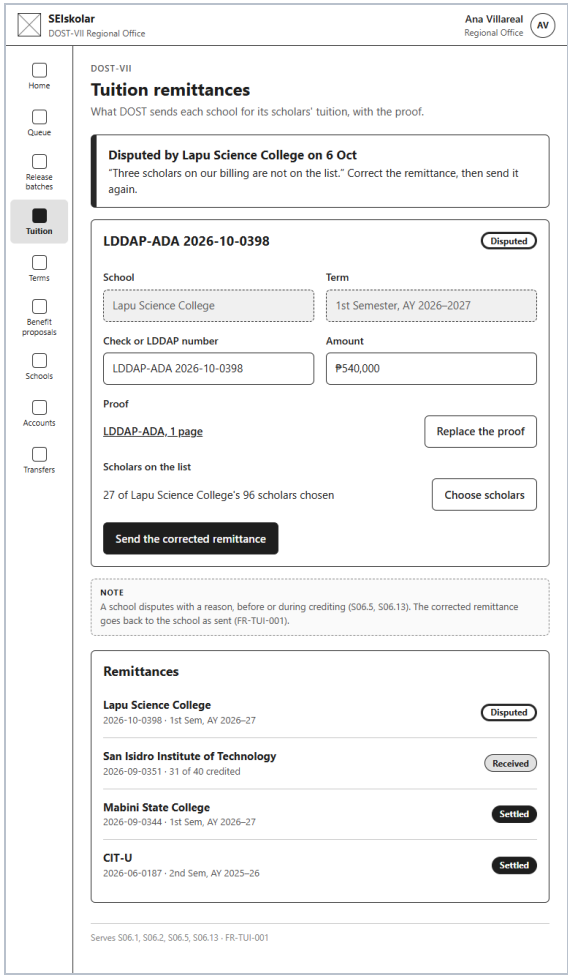

Tablet · 768 px

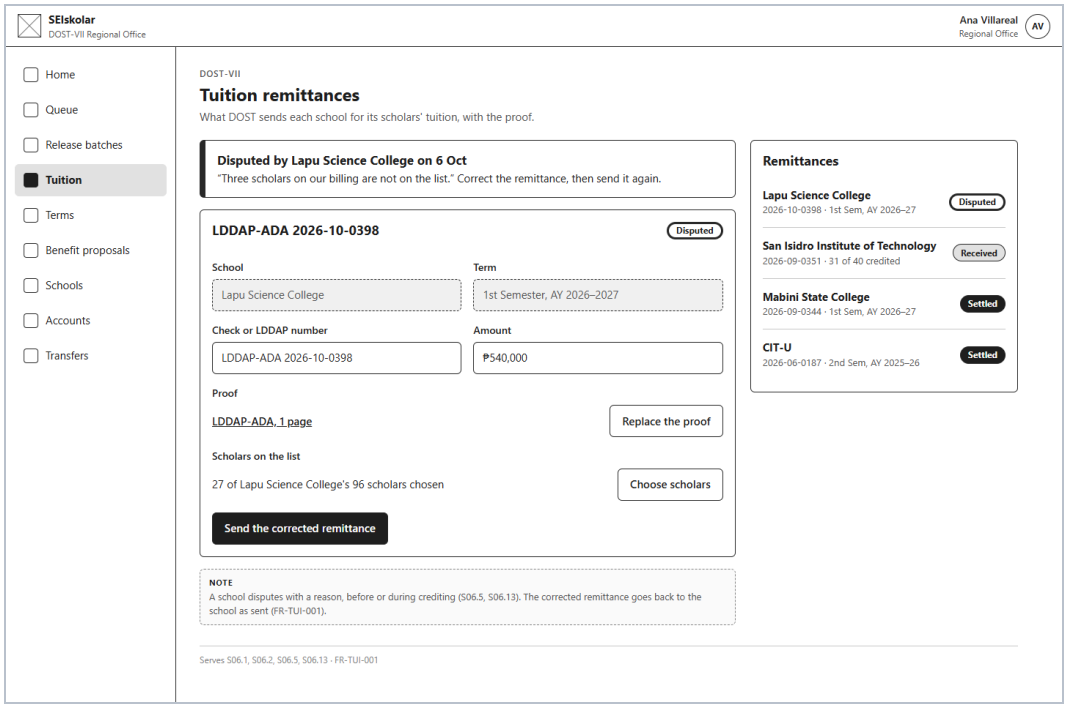

Desktop · 1440 px

Repository: `03-low-fidelity/regional-remittance.html?state=disputed` · Figma: page 03 Low-fidelity, section regional-remittance.html, frames `regional-remittance--disputed.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 18 OF 29

Regional Office: benefit proposals

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Serves S07.1, S07.2, S07.5 · FR-BEN-002 · Swimlane 07 · Finished on page **111**

NOTE A proposal changes nothing until Central Office approves it (FR-BEN-002). A rejected one shows Central Office's reason (S07.5).

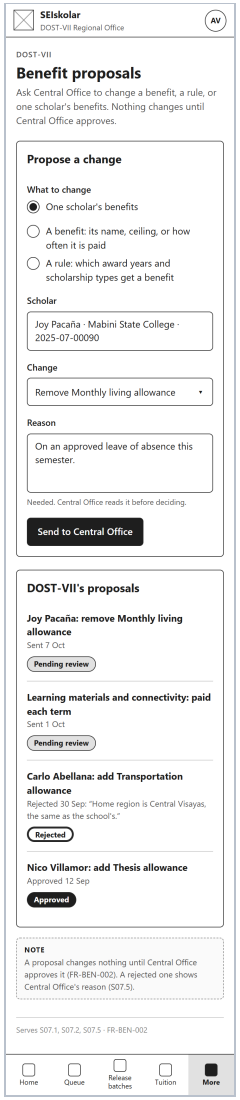

Phone · 360 px

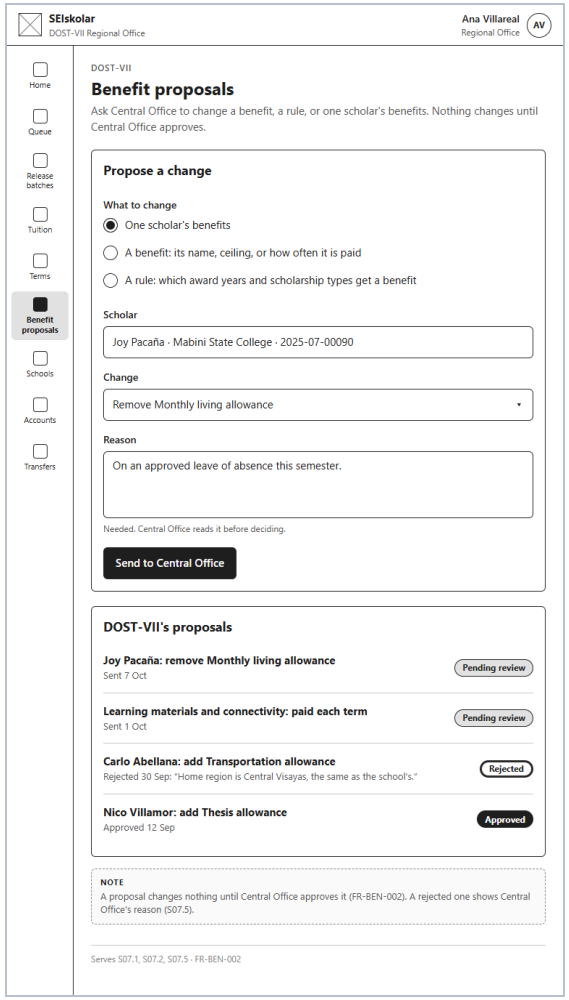

Tablet · 768 px

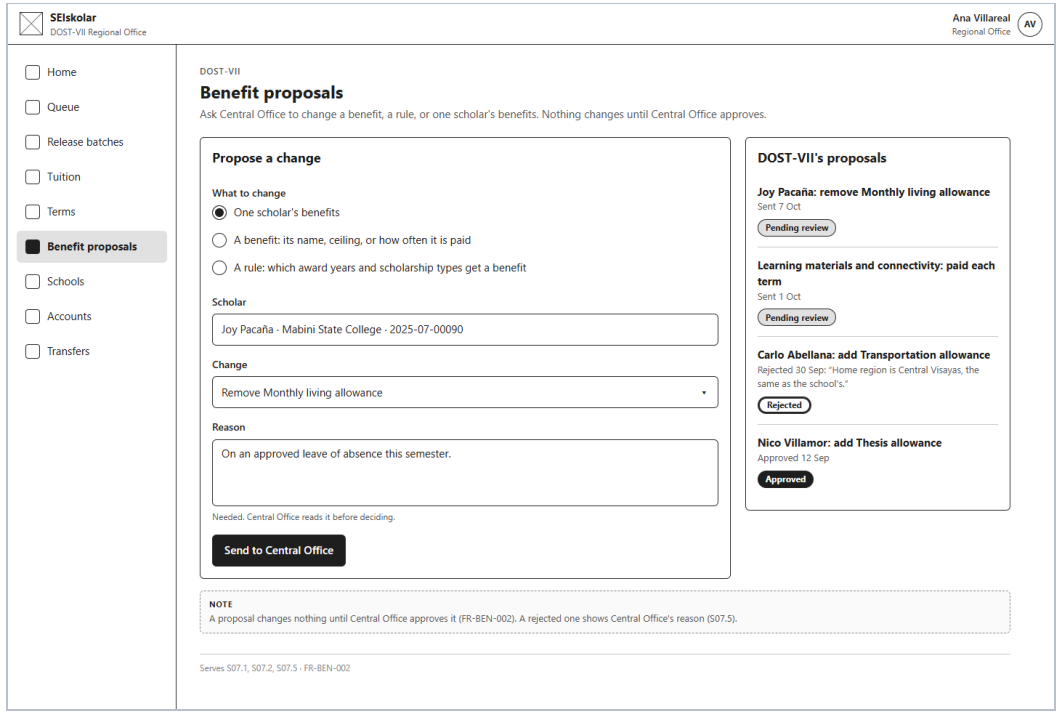

Desktop · 1440 px

Repository: `03-low-fidelity/regional-benefit-proposal.html` · Figma: page 03 Low-fidelity, section regional-benefit-proposal.html, frames `regional-benefit-proposal.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 19 OF 29

Regional Office: schools

Owner: Dorothy Biatriz Capao (@dbeenutsz)

Serves S08.4 · FR-ADM-001 · Swimlane 08 · Finished on page **112**

NOTE A Regional Office creates schools in its own region only (FR-ADM-001). The school's coordinator then sets up its calendar, requirement names and portal (swimlanes 02 and 09).

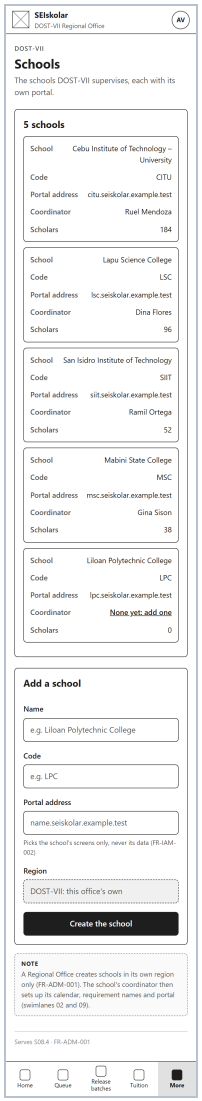

Phone · 360 px

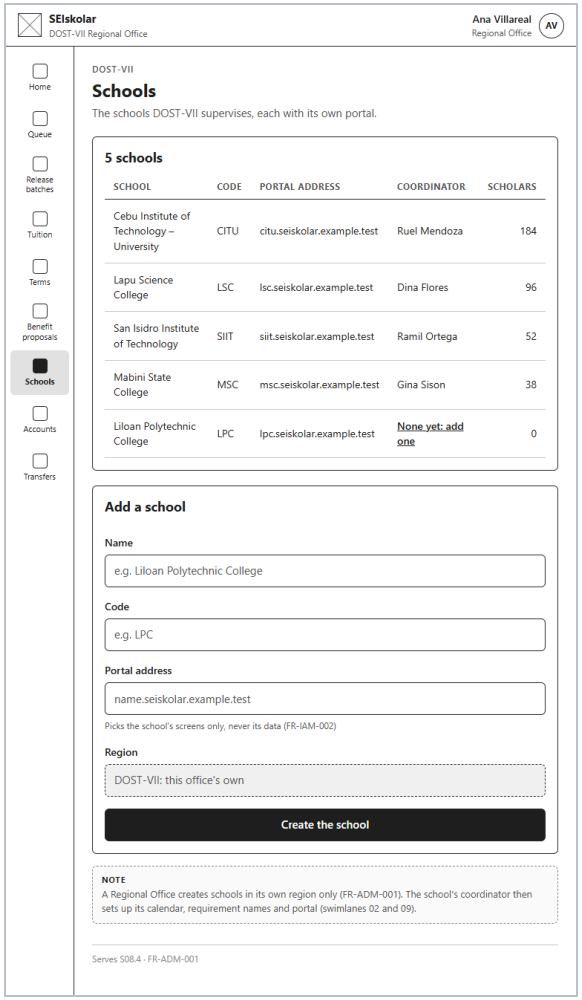

Tablet · 768 px

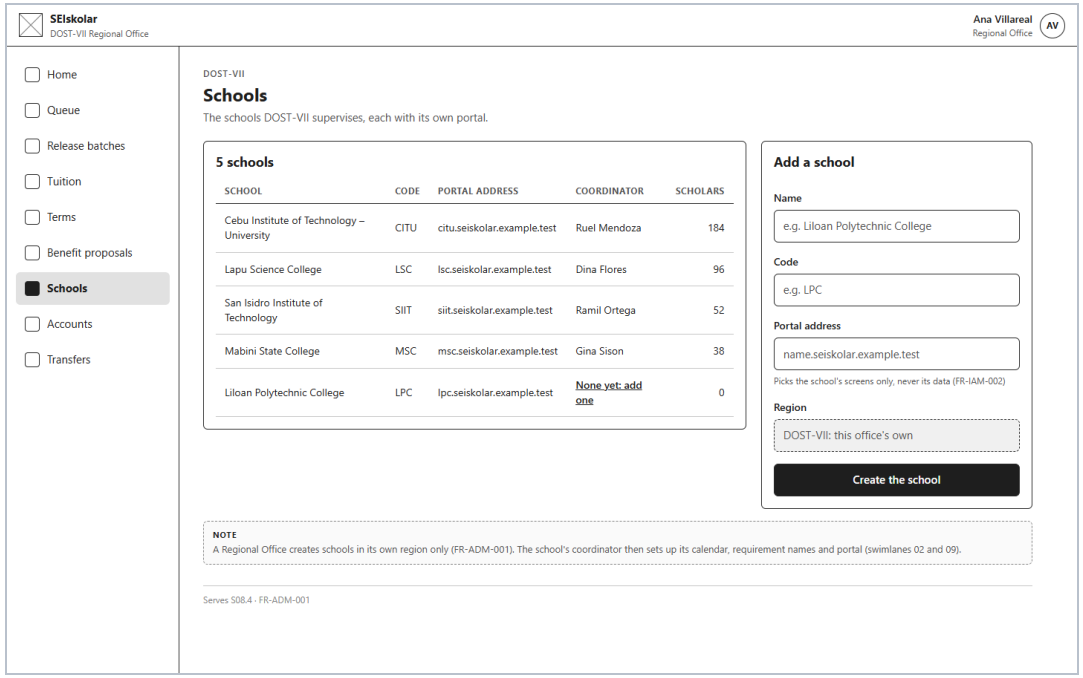

Desktop · 1440 px

Repository: `03-low-fidelity/regional-schools.html` · Figma: page 03 Low-fidelity, section regional-schools.html, frames `regional-schools.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 20 OF 29

Regional Office: accounts

Scholars · state 1 of 2

Owner: Dorothy Biatriz Capao (@dbeenutsz)

Serves S08.5 to S08.7 · FR-ADM-001 · Swimlane 08 · Finished on page 113

NOTE A Regional Office creates accounts for its own region's schools only; DOST staff accounts are the system administrator's (FR-ADM-001). A new account signs in with its email (swimlane 01).

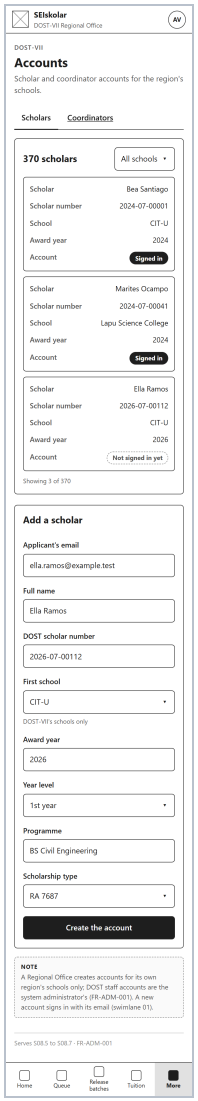

Phone · 360 px

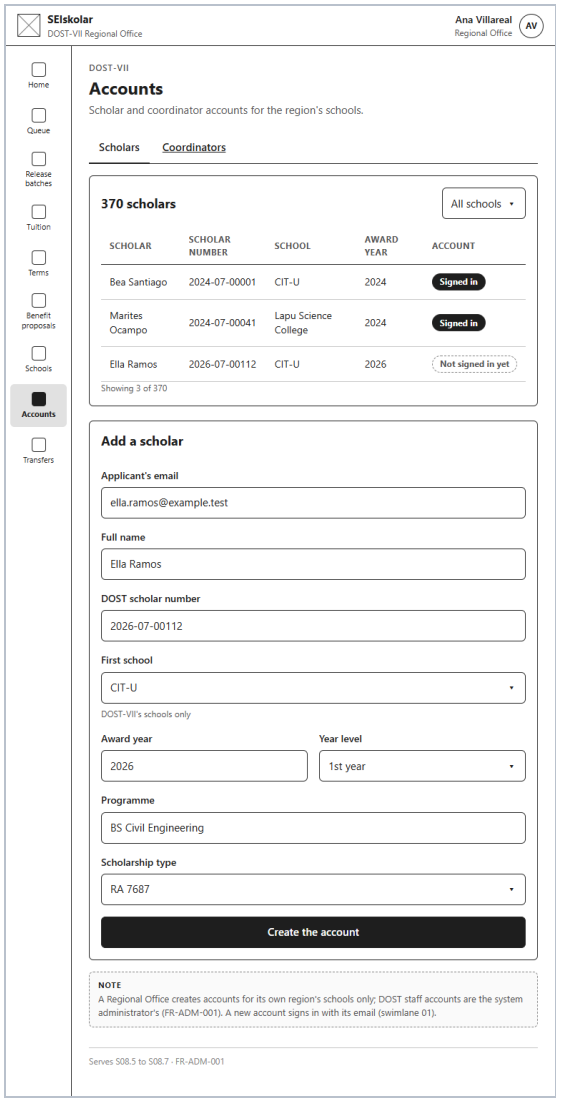

Tablet · 768 px

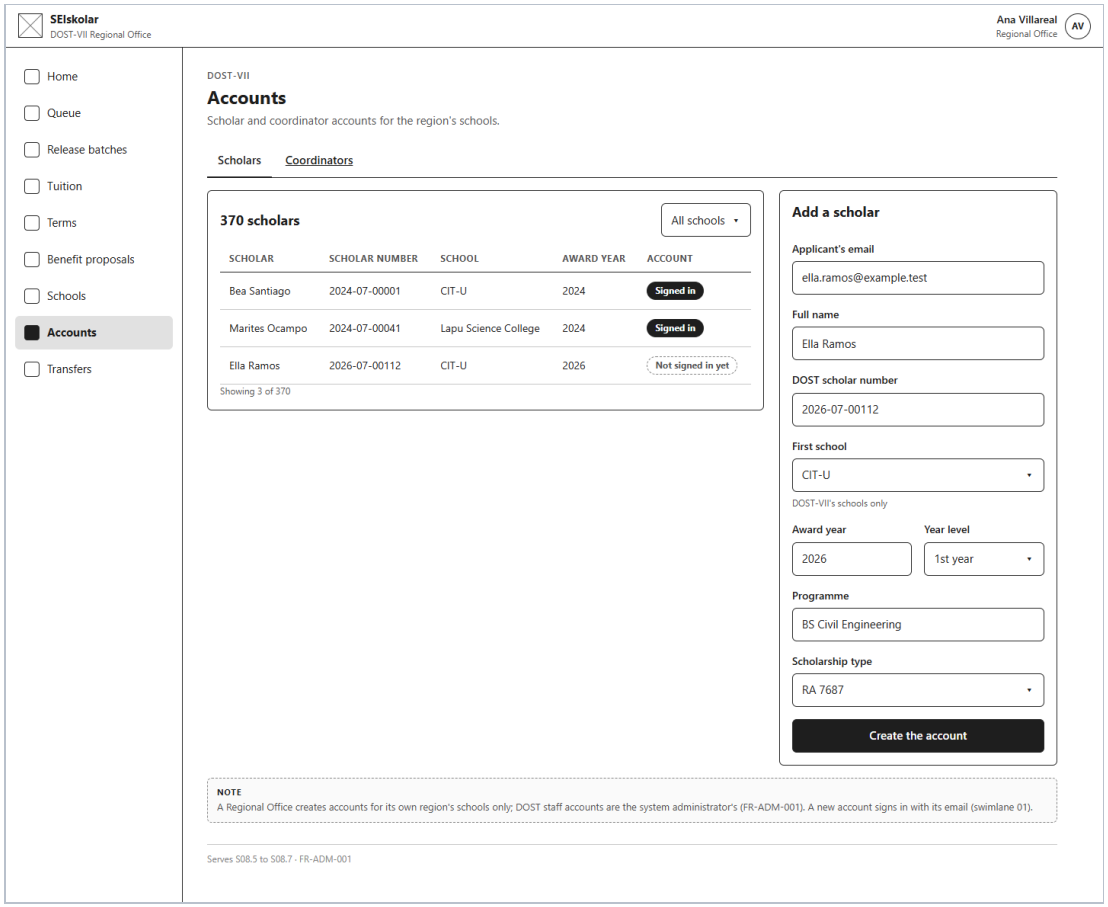

Desktop · 1440 px

Repository: `03-low-fidelity/regional-accounts.html?state=scholars` · Figma: page 03 Low-fidelity, section regional-accounts.html, frames `regional-accounts--scholars.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 20 OF 29

Regional Office: accounts

Coordinators · state 2 of 2

Owner: Dorothy Biatriz Capao (@dbeenutsz)

Serves S08.5 to S08.7 · FR-ADM-001 · Swimlane 08 · Finished on page **114**

NOTE A Regional Office creates accounts for its own region's schools only; DOST staff accounts are the system administrator's (FR-ADM-001). A new account signs in with its email (swimlane 01).

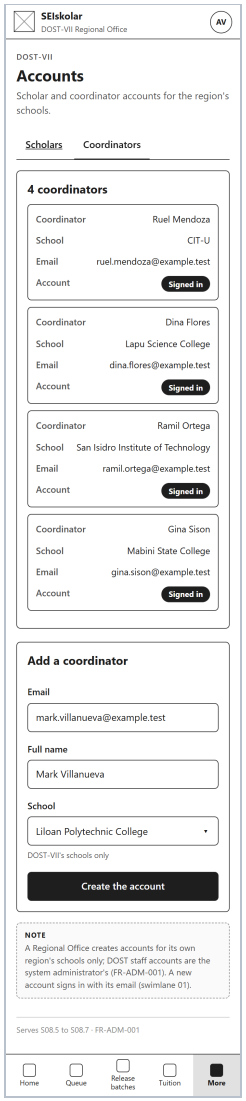

Phone · 360 px

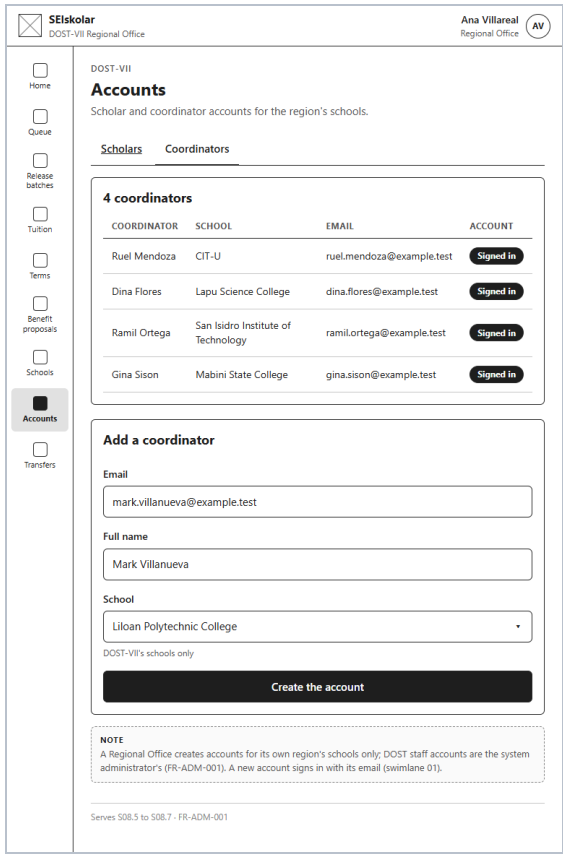

Tablet · 768 px

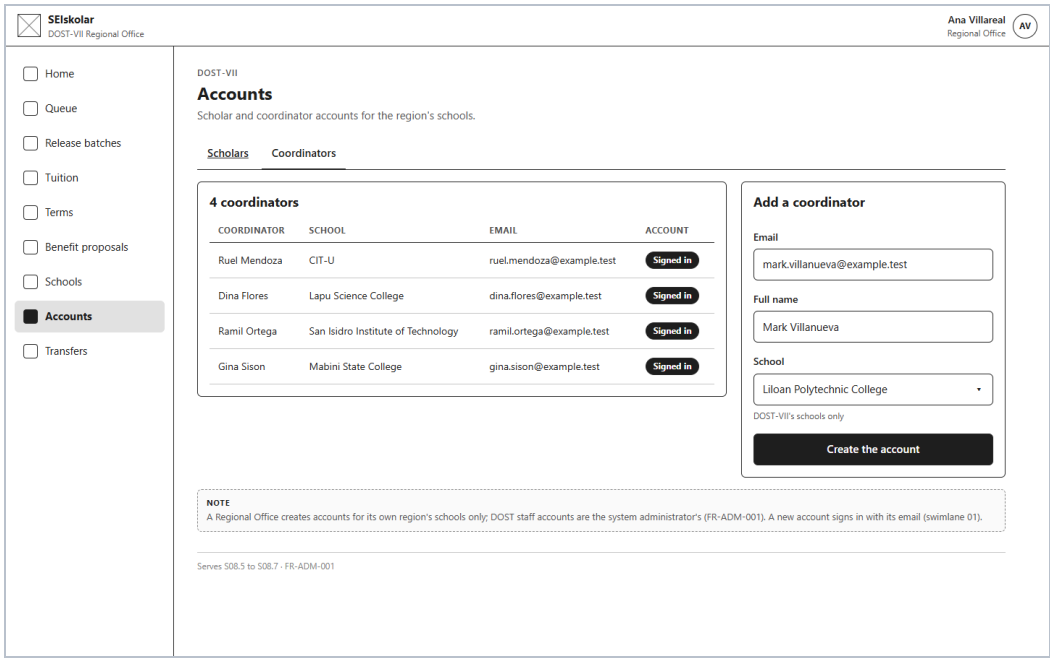

Desktop · 1440 px

Repository: `03-low-fidelity/regional-accounts.html?state=coordinators` · Figma: page 03 Low-fidelity, section regional-accounts.html, frames `regional-accounts--coordinators.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 21 OF 29

Regional Office: transfers

Owner: Dorothy Biatriz Capao (@dbeenutsz)

Serves S08.9 to S08.11, S08.13 · FR-ADM-002 · Swimlane 08 · Finished on page **115**

ASSUMED NOTES

- Aira's filings at Mabini State College keep that school; from the next term, Aira files at Lapu Science College (S08.11, S08.12).
- Assumed The SRS does not settle which Regional Office records a move to another region (open question 26, S08.13), so this screen offers DOST-VII's schools only.

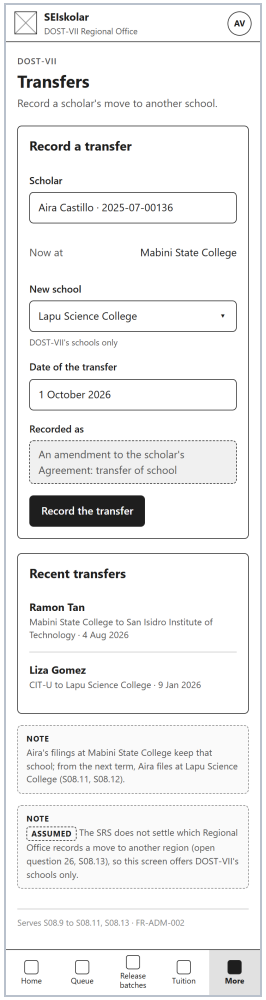

Phone · 360 px

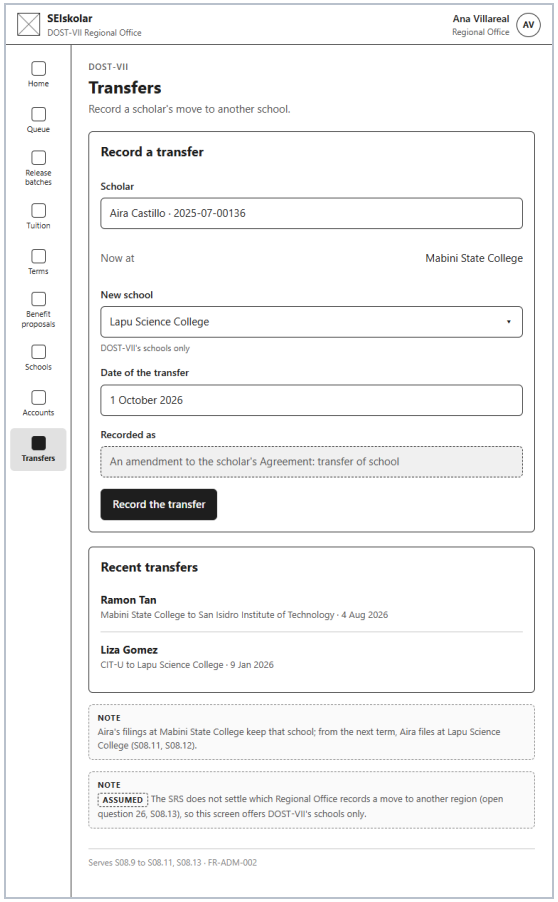

Tablet · 768 px

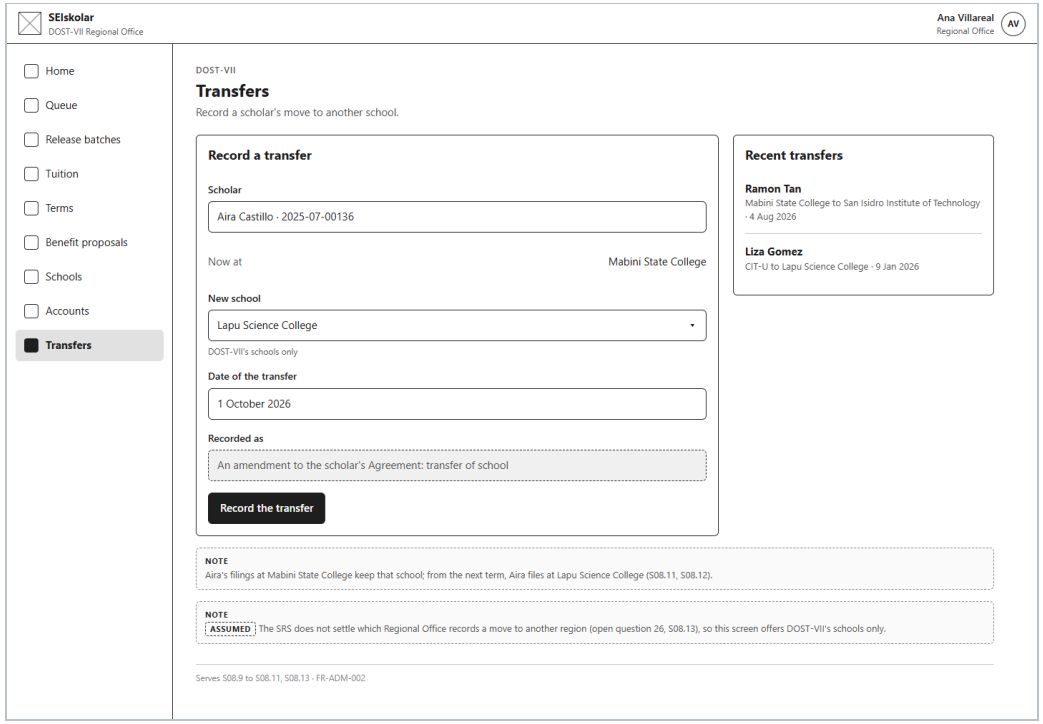

Desktop · 1440 px

Repository: `03-low-fidelity/regional-transfer.html` · Figma: page 03 Low-fidelity, section regional-transfer.html, frames `regional-transfer.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 22 OF 29

Owner: Zedric Camilotes (@zedric-git)

A record's history

Serves S10.5 to S10.8 · NFR-SEC-003; SRS §4.1 "Inspect Immutable Audit Logs" · Swimlane 10 · Finished on page **116**

NOTE No one can change or delete a line (S10.4). Its region comes from the record's school, never from whoever acted (S10.3). The Regional Office reads its own region's records and Central Office reads all; a scholar or coordinator who opens this address gets nothing back (S10.6, S10.8).

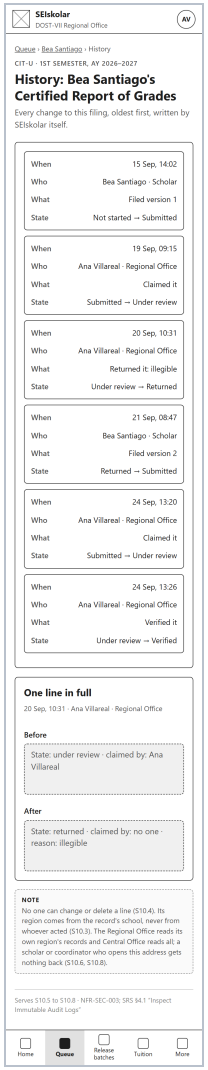

Phone · 360 px

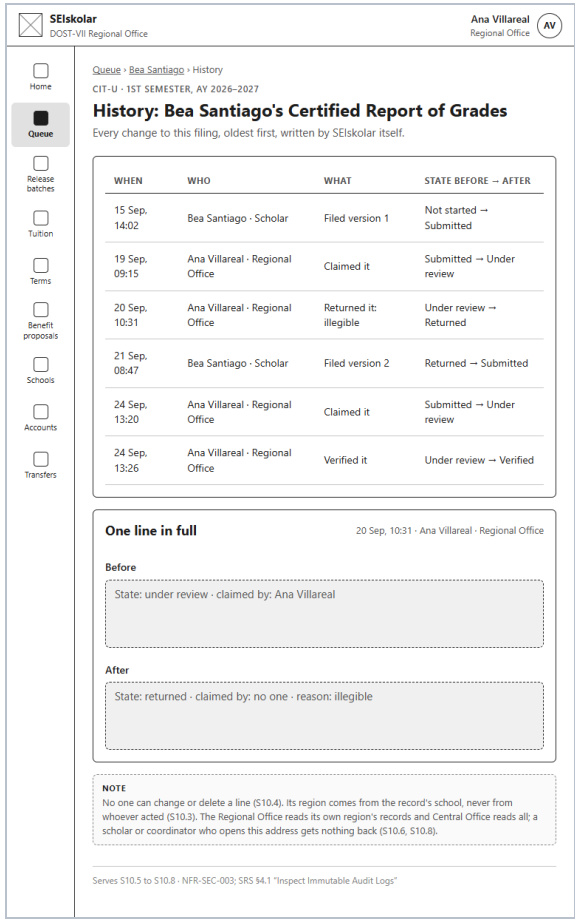

Tablet · 768 px

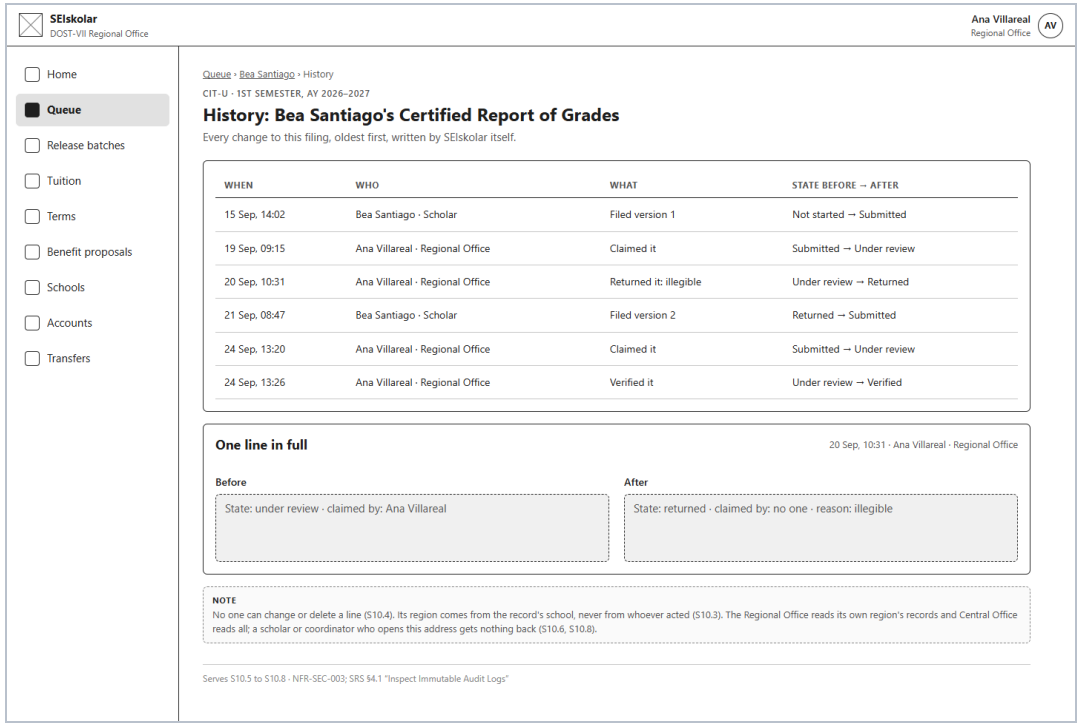

Desktop · 1440 px

Repository: `03-low-fidelity/record-history.html` · Figma: page 03 Low-fidelity, section record-history.html, frames `record-history.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 23 OF 29

Central Office: release batches

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Serves S05.6 · FR-REL-002 · Swimlane 05 · Finished on page **117**

NOTE Central Office reads every region's batches (SRS §1.3). Every decision on a batch records who made it and when (FR-REL-002).

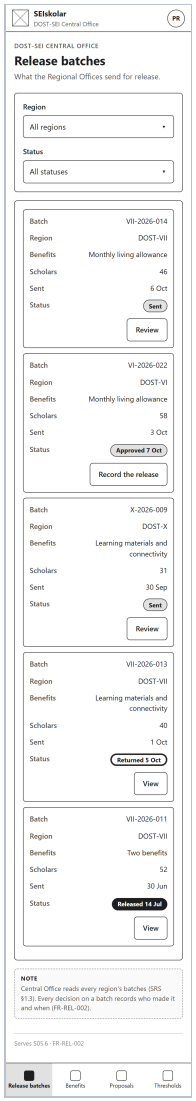

Phone · 360 px

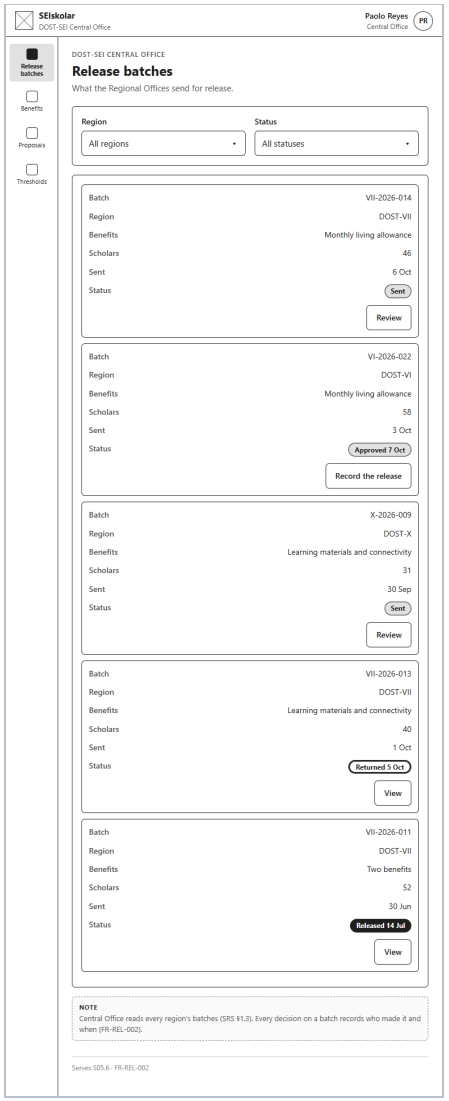

Tablet · 768 px

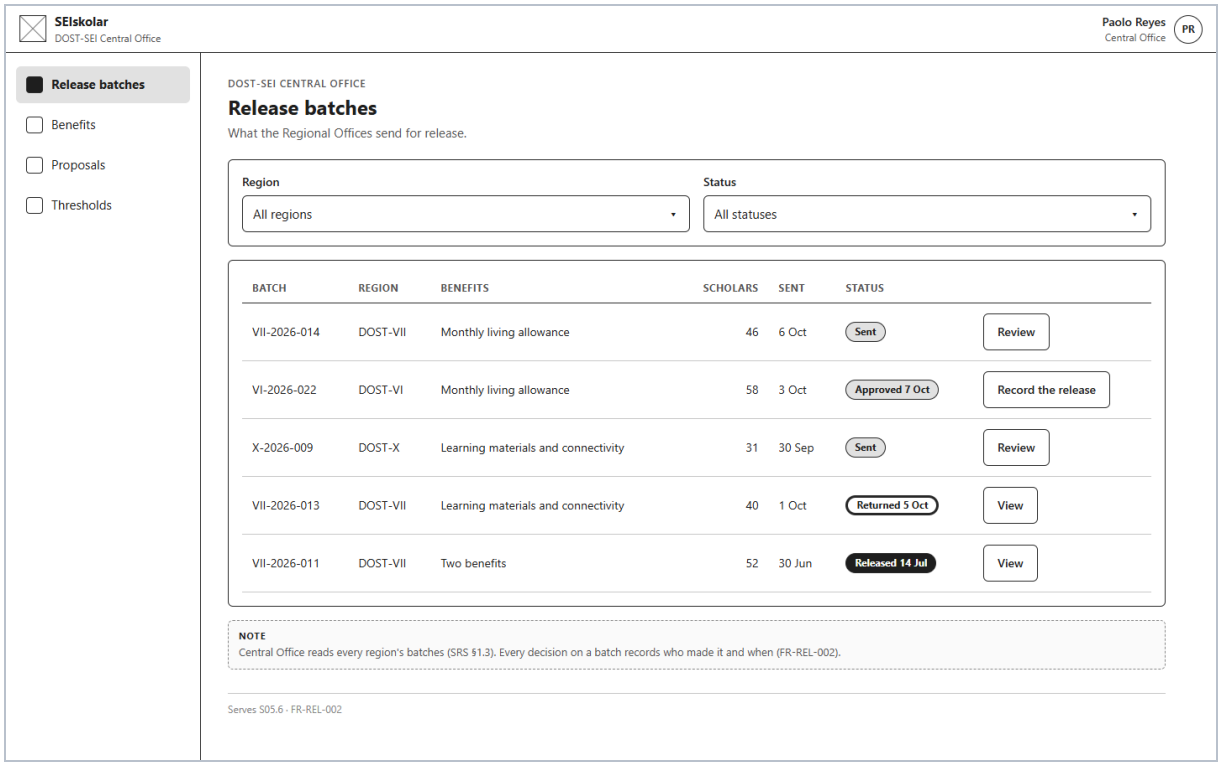

Desktop · 1440 px

Repository: `03-low-fidelity/central-batches.html` · Figma: page 03 Low-fidelity, section central-batches.html, frames `central-batches.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 24 OF 29

Central Office: a release batch

Review · state 1 of 2

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Serves S05.6 to S05.11 · FR-REL-002 · Swimlane 05 · Finished on page **118**

NOTE Removing one scholar needs a reason, which the scholar sees; the scholar moves to a later batch and loses nothing (S05.6, S05.13). Returning the whole batch needs a reason too (S05.8).

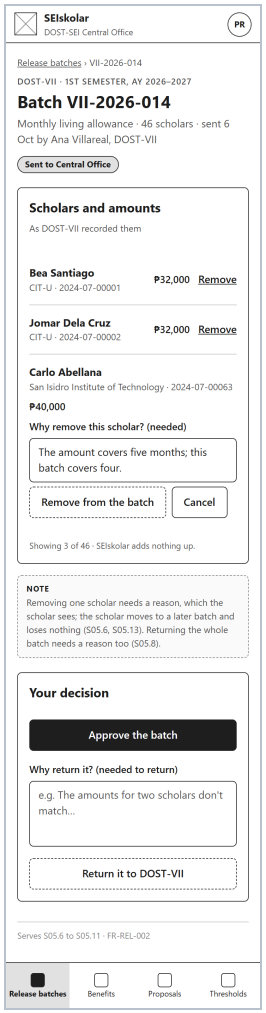

Phone · 360 px

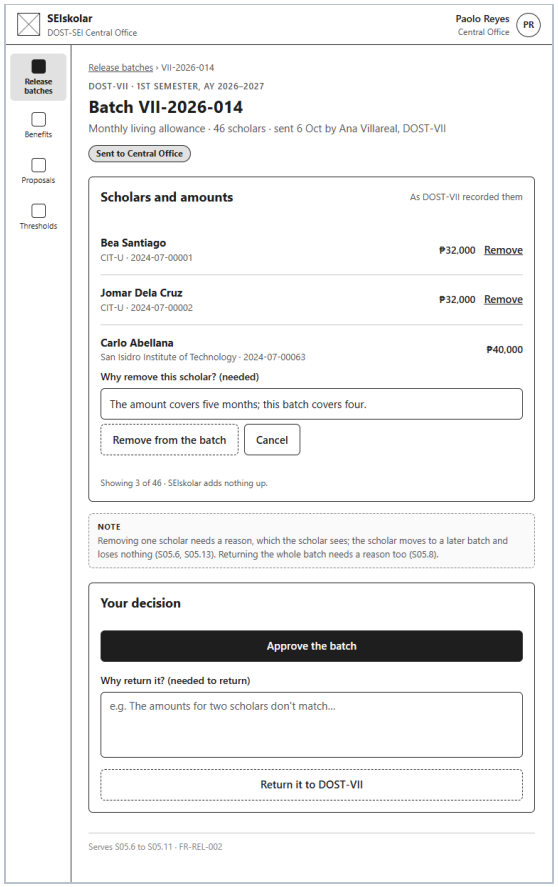

Tablet · 768 px

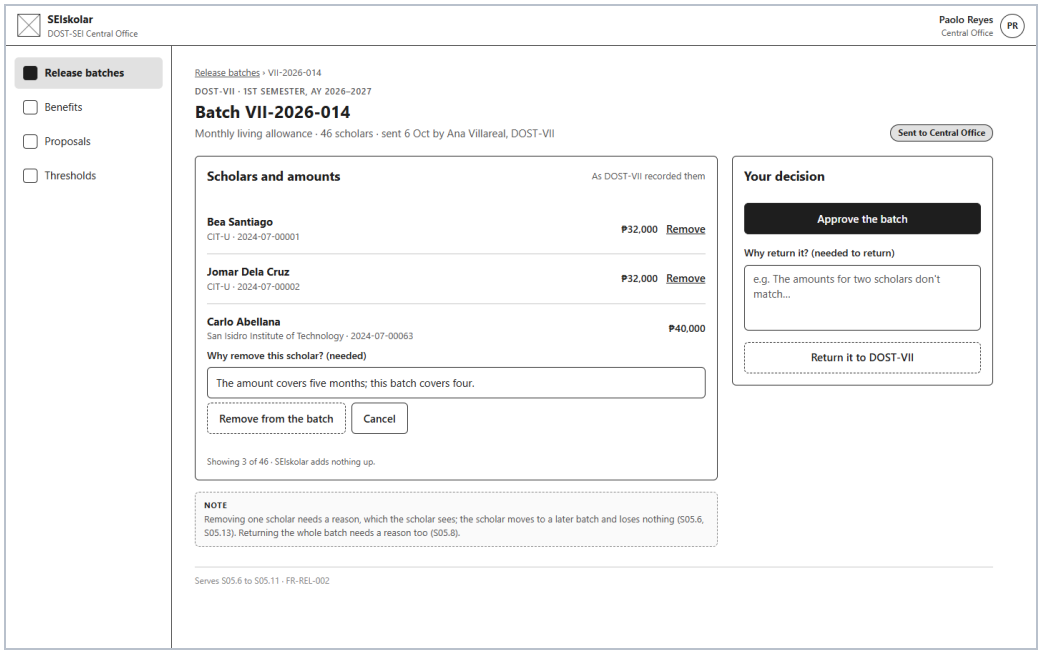

Desktop · 1440 px

Repository: `03-low-fidelity/central-batch.html?state=review` · Figma: page 03 Low-fidelity, section central-batch.html, frames `central-batch--review.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 24 OF 29

Central Office: a release batch

Approved · state 2 of 2

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Serves S05.6 to S05.11 · FR-REL-002 · Swimlane 05 · Finished on page **119**

NOTE SEIskolar records the release and its date. It cannot see the money reach anyone's account (FR-REL-003).

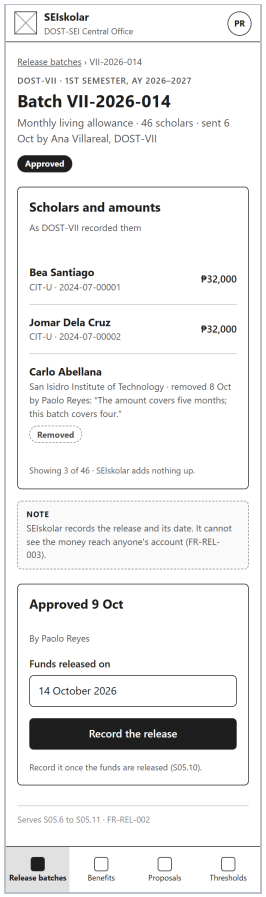

Phone · 360 px

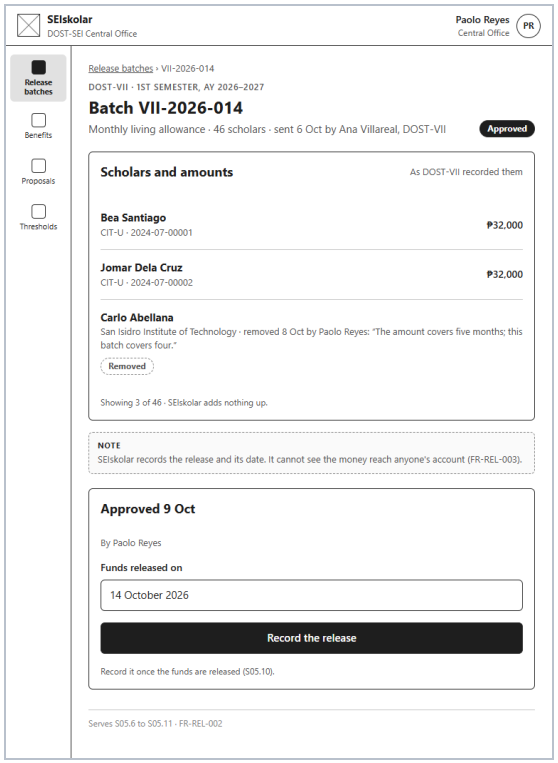

Tablet · 768 px

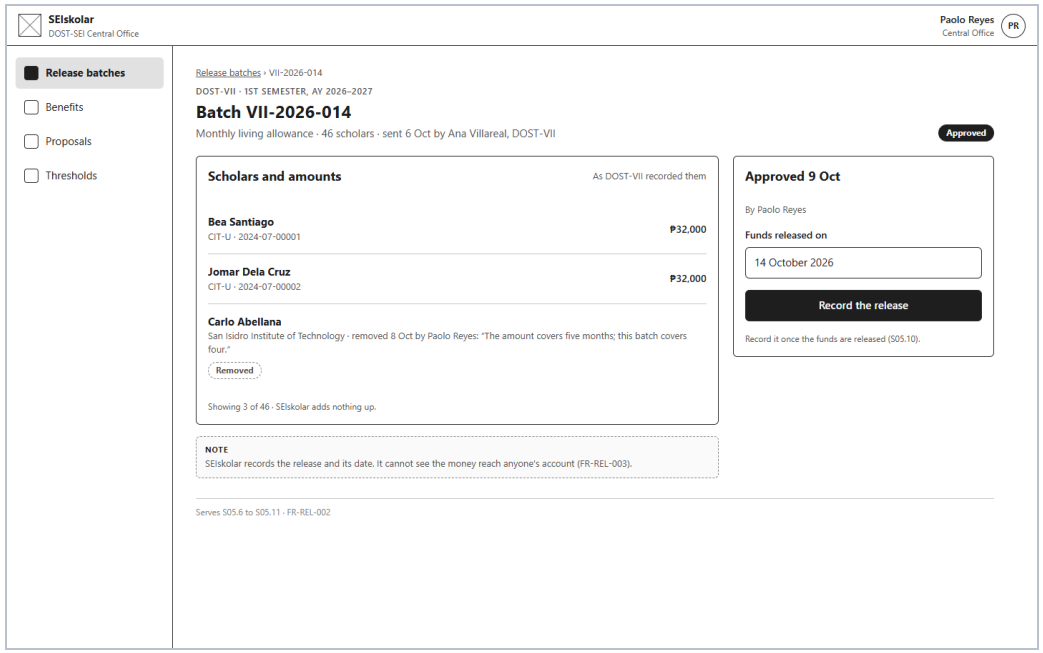

Desktop · 1440 px

Repository: `03-low-fidelity/central-batch.html?state=approved` · Figma: page 03 Low-fidelity, section central-batch.html, frames `central-batch--approved.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 25 OF 29

Central Office: benefits

Benefits · state 1 of 3

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Serves S07.7, S07.8 · FR-BEN-001, FR-BEN-002 · Swimlane 07 · Finished on page **120**

NOTE Every change keeps who made it and the reason (S07.8). Ceilings here are sample values; the real list starts from the Agreement's §VI. A Regional Office can only propose a change (FR-BEN-002).

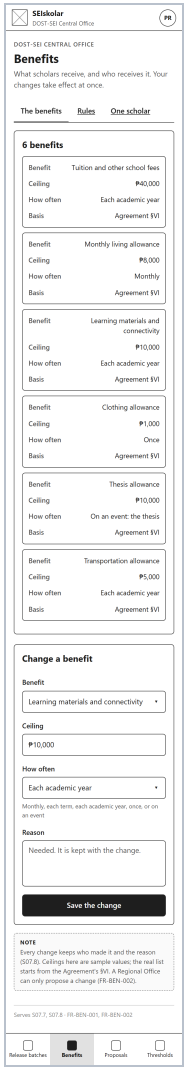

Phone · 360 px

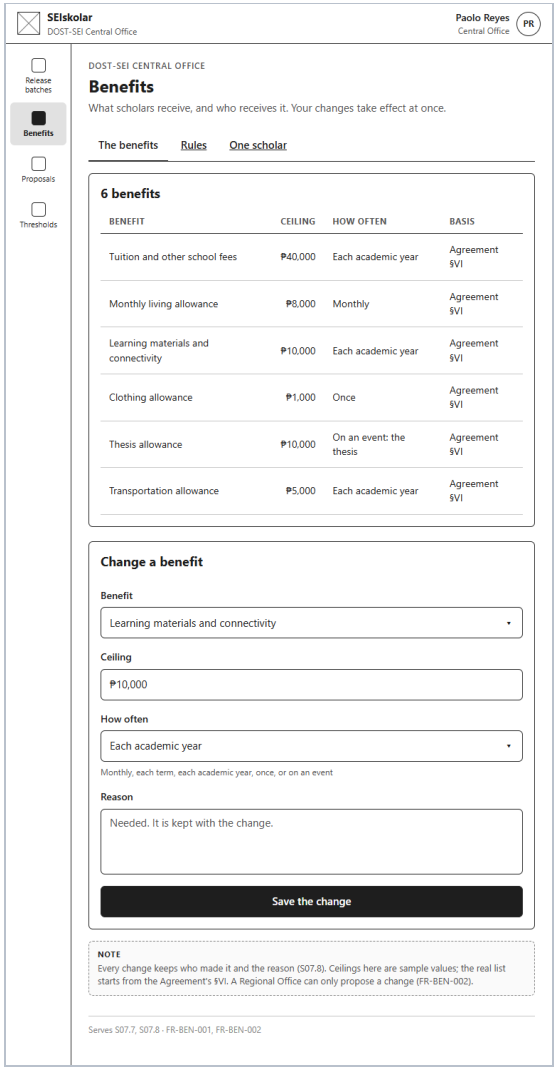

Tablet · 768 px

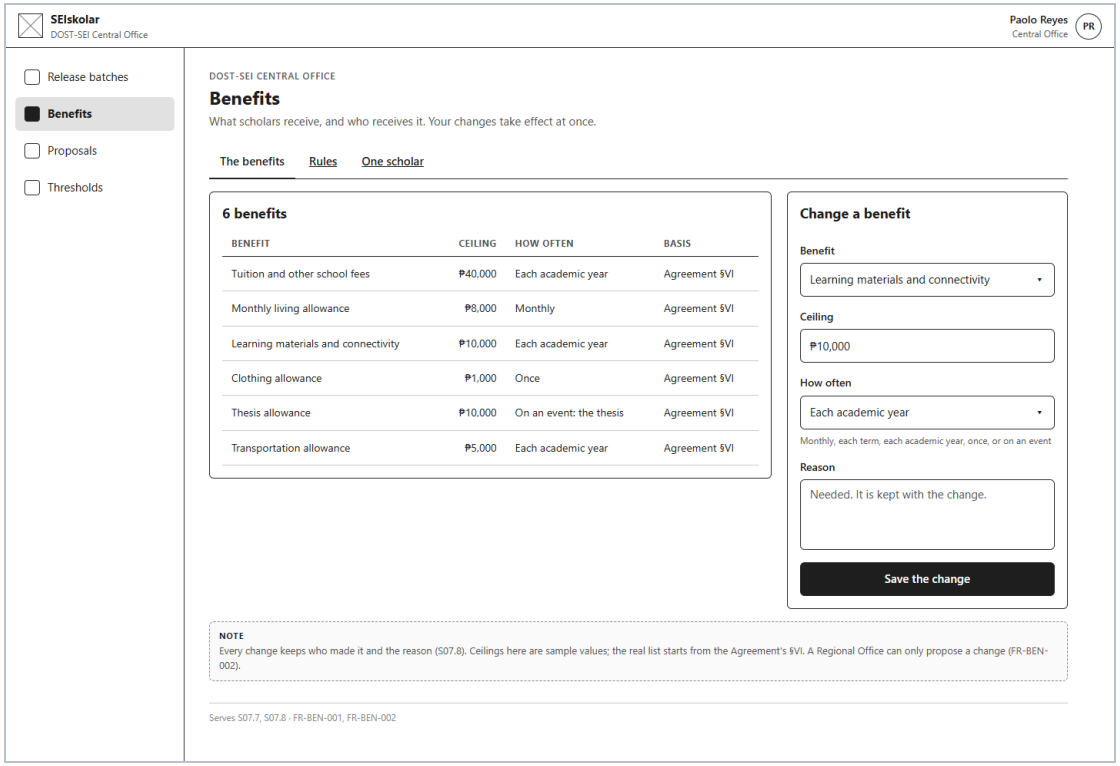

Desktop · 1440 px

Repository: `03-low-fidelity/central-benefits.html?state=benefits` · Figma: page 03 Low-fidelity, section central-benefits.html, frames `central-benefits--benefits.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 25 OF 29

Central Office: benefits

Rules · state 2 of 3

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Serves S07.7, S07.8 · FR-BEN-001, FR-BEN-002 · Swimlane 07 · Finished on page **121**

NOTE Every change keeps who made it and the reason (S07.8). Ceilings here are sample values; the real list starts from the Agreement's §VI. A Regional Office can only propose a change (FR-BEN-002).

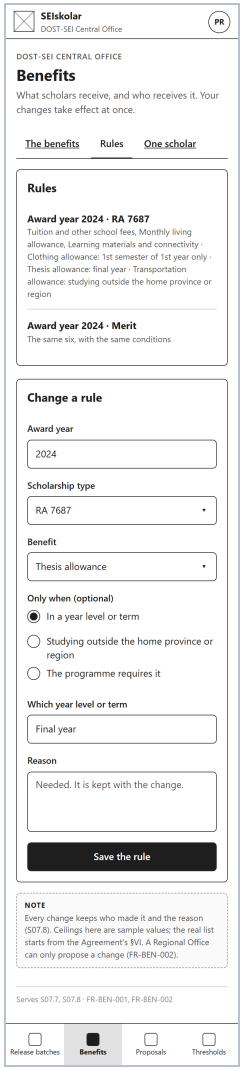

Phone · 360 px

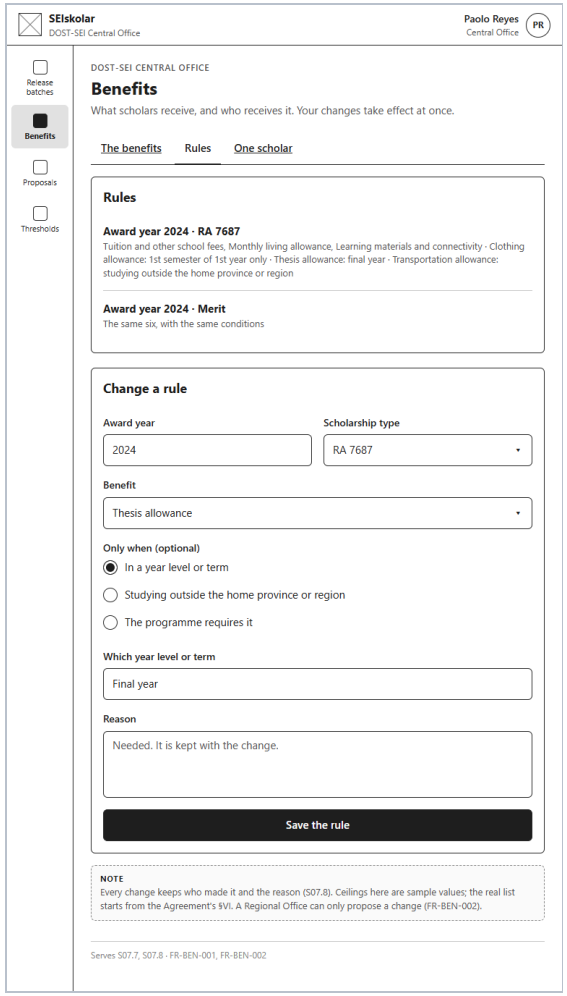

Tablet · 768 px

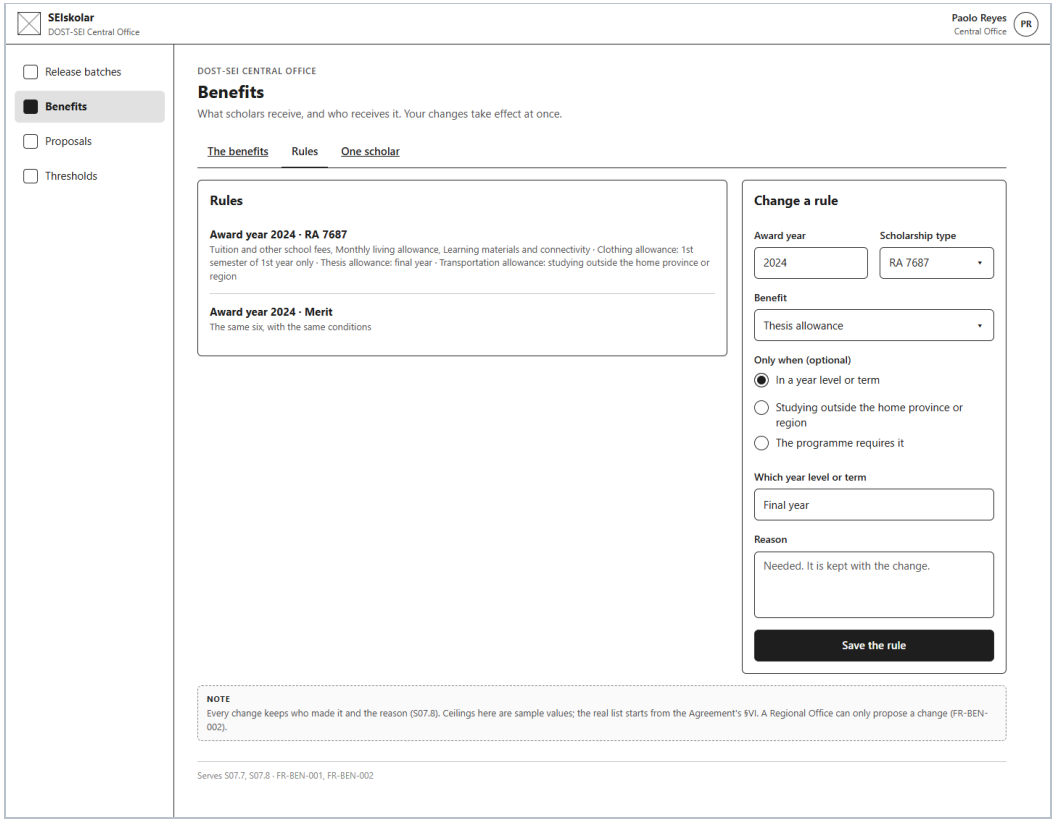

Desktop · 1440 px

Repository: `03-low-fidelity/central-benefits.html?state=rules` · Figma: page 03 Low-fidelity, section central-benefits.html, frames `central-benefits--rules.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 25 OF 29

Central Office: benefits

Scholar · state 3 of 3

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Serves S07.7, S07.8 · FR-BEN-001, FR-BEN-002 · Swimlane 07 · Finished on page **122**

NOTE Every change keeps who made it and the reason (S07.8). Ceilings here are sample values; the real list starts from the Agreement's §VI. A Regional Office can only propose a change (FR-BEN-002).

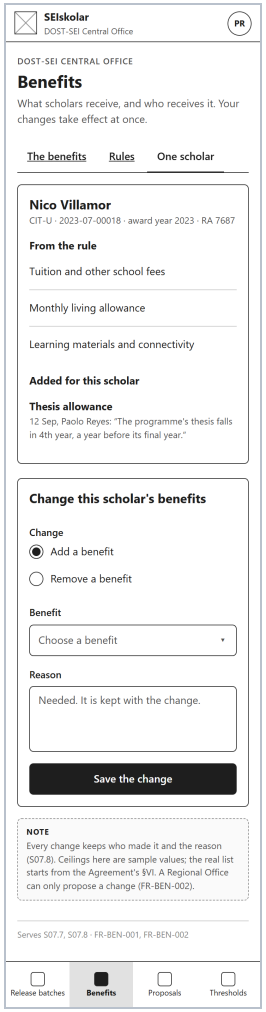

Phone · 360 px

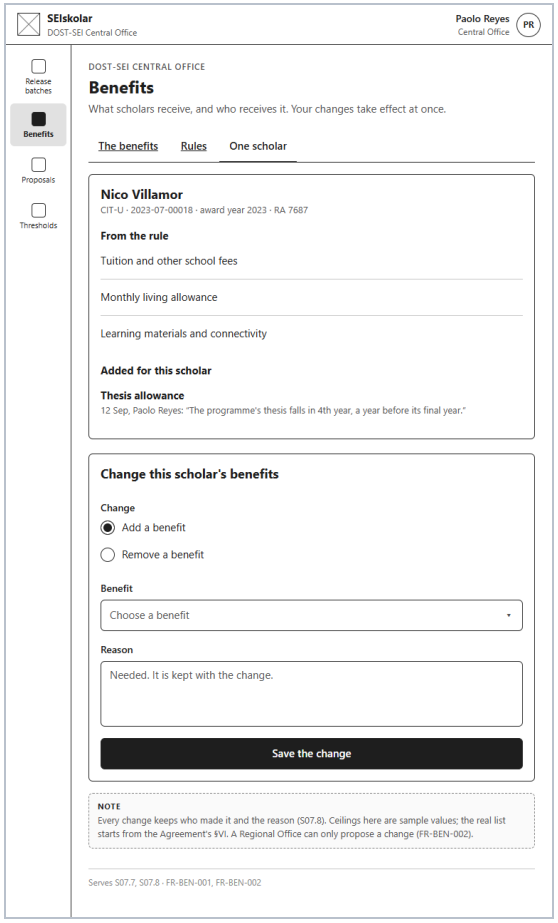

Tablet · 768 px

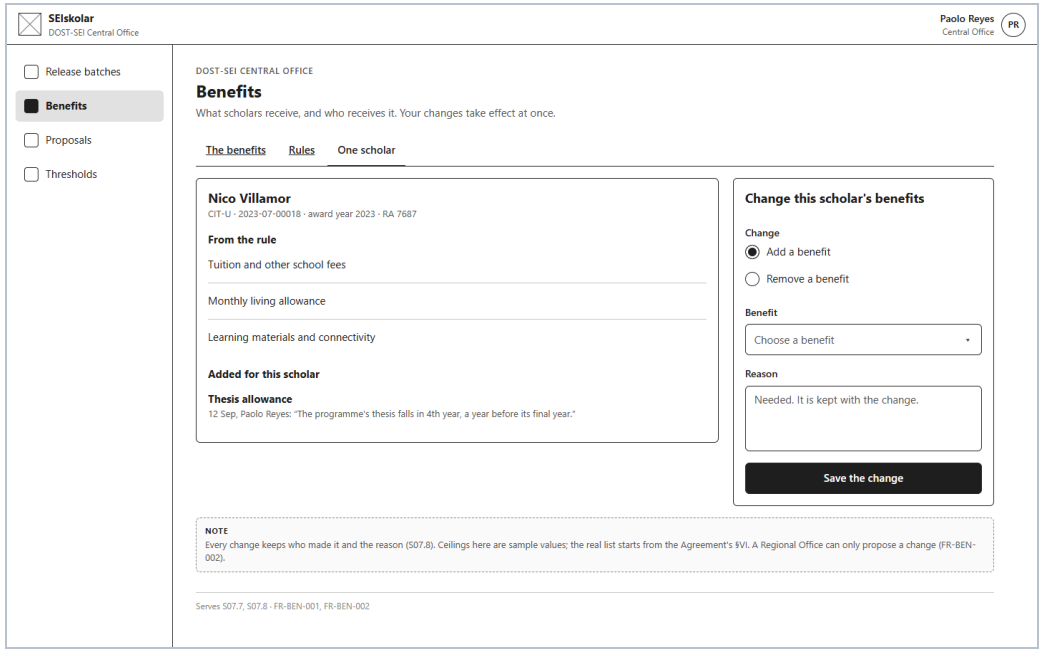

Desktop · 1440 px

Repository: `03-low-fidelity/central-benefits.html?state=scholar` · Figma: page 03 Low-fidelity, section central-benefits.html, frames `central-benefits--scholar.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 26 OF 29

Central Office: proposals

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Serves S07.3, S07.4, S07.6 · FR-BEN-002 · Swimlane 07 · Finished on page **123**

NOTE Approving makes the change at once (S07.6). Rejecting needs a reason, which the Regional Office sees (S07.4, S07.5).

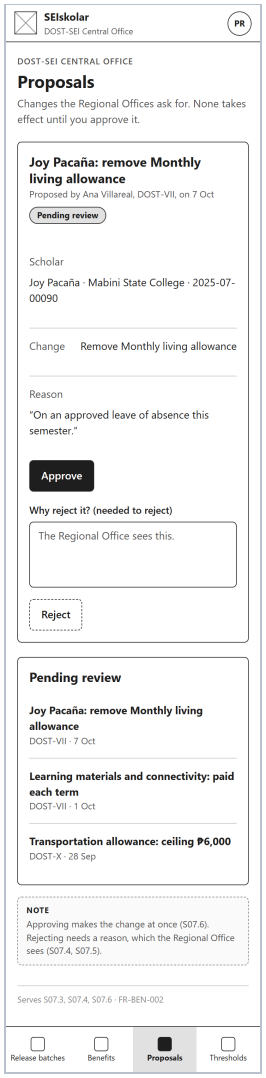

Phone · 360 px

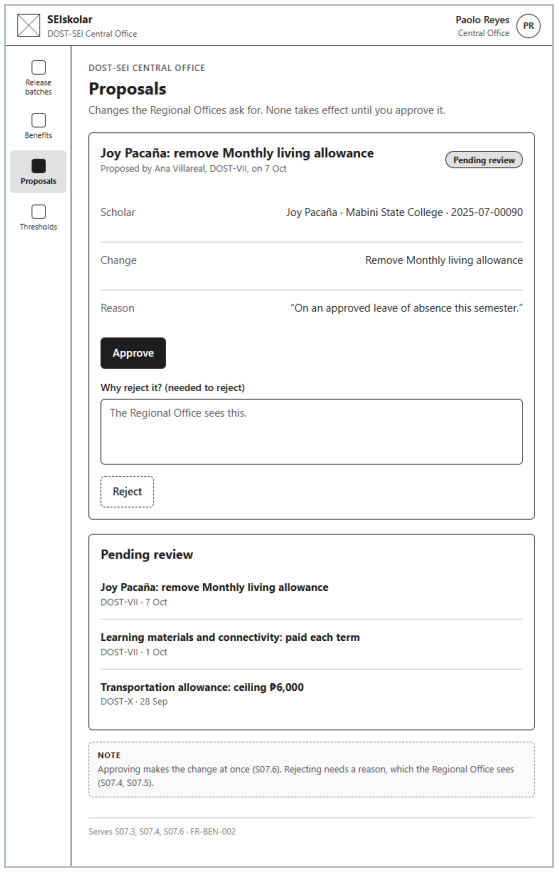

Tablet · 768 px

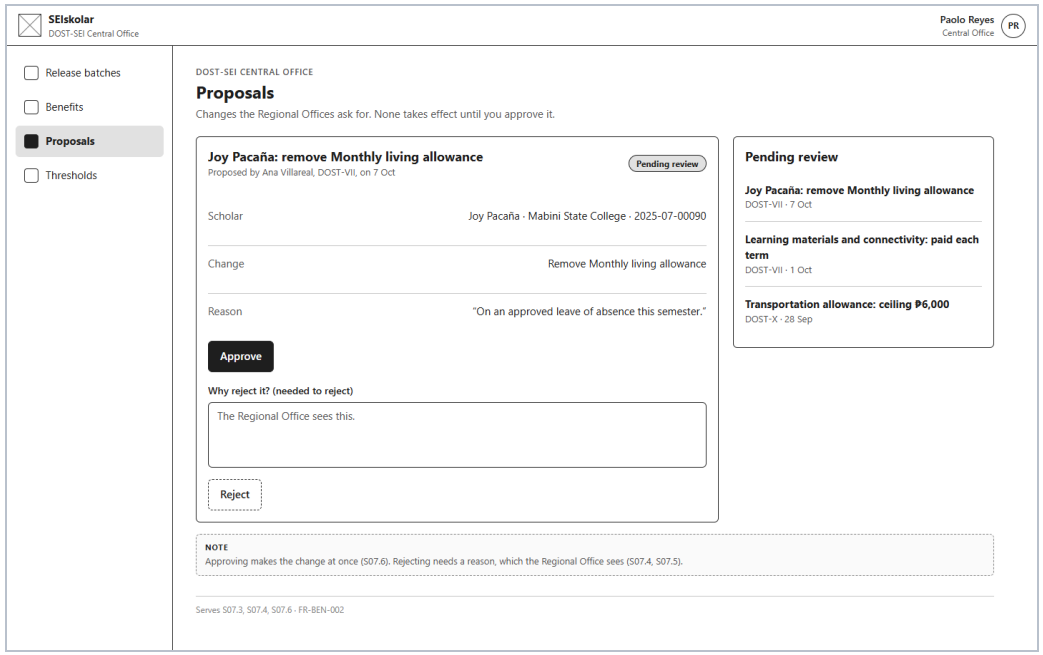

Desktop · 1440 px

Repository: `03-low-fidelity/central-proposals.html` · Figma: page 03 Low-fidelity, section central-proposals.html, frames `central-proposals.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 27 OF 29

Central Office: thresholds

Owner: Althea Maeve Kinaadman (@Tiamporado)

Serves S09.4, S09.5 · FR-ADM-003 · Swimlane 09 · Finished on page **124**

NOTE Each school's coordinator sets its scale and passing grade (S09.2); Central Office sets only the threshold (S09.4). Scholars see whether a term's average meets it, never a verdict on their standing (S09.6, FR-ADM-003).

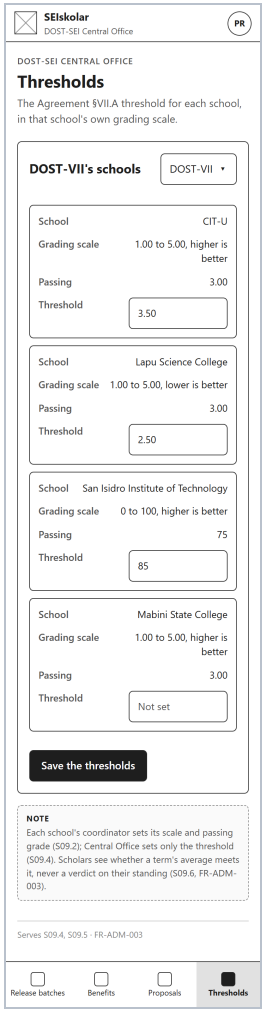

Phone · 360 px

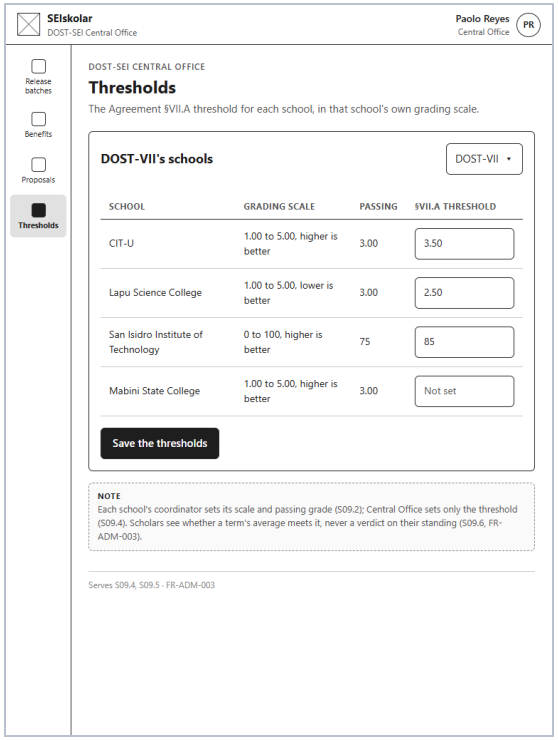

Tablet · 768 px

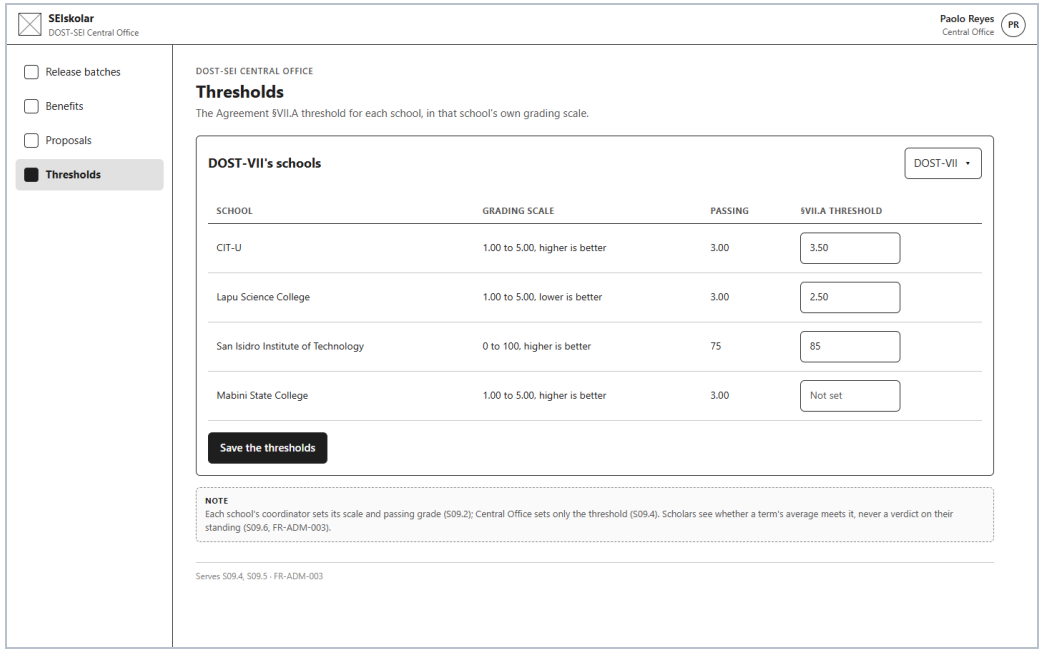

Desktop · 1440 px

Repository: `03-low-fidelity/central-thresholds.html` · Figma: page 03 Low-fidelity, section central-thresholds.html, frames `central-thresholds.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 28 OF 29

Administrator: DOST staff accounts

Owner: Genril Theo Soroño (@gnthril)

Serves S08.2, S08.3 · FR-ADM-001 · Swimlane 08 · Finished on page **125**

> **NOTE** The system administrator creates DOST staff accounts only. Schools, coordinators and scholars are the Regional Office's (FR-ADM-001), and the administrator makes no program decision (SRS §1.3).

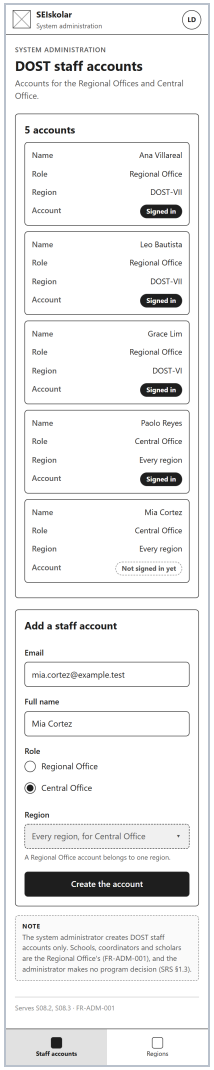

Phone · 360 px

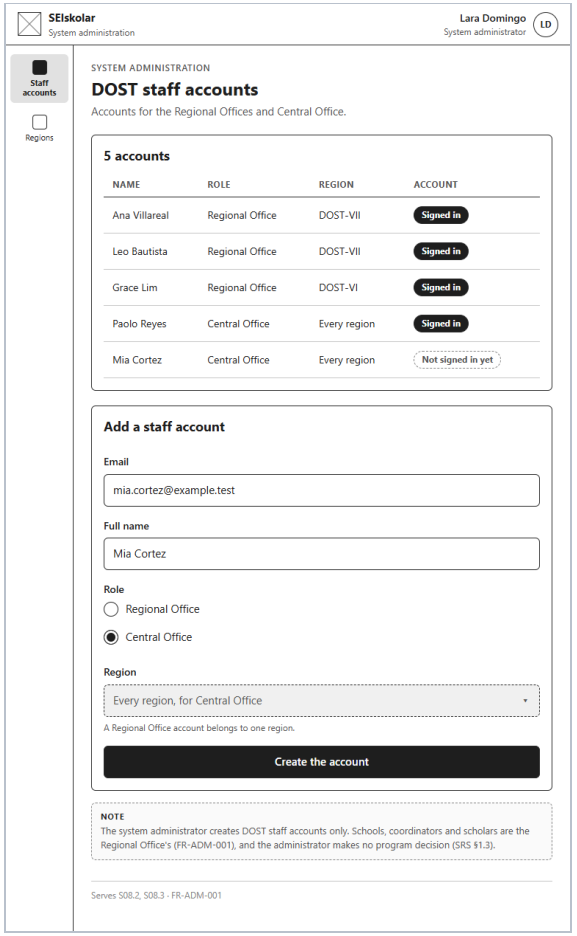

Tablet · 768 px

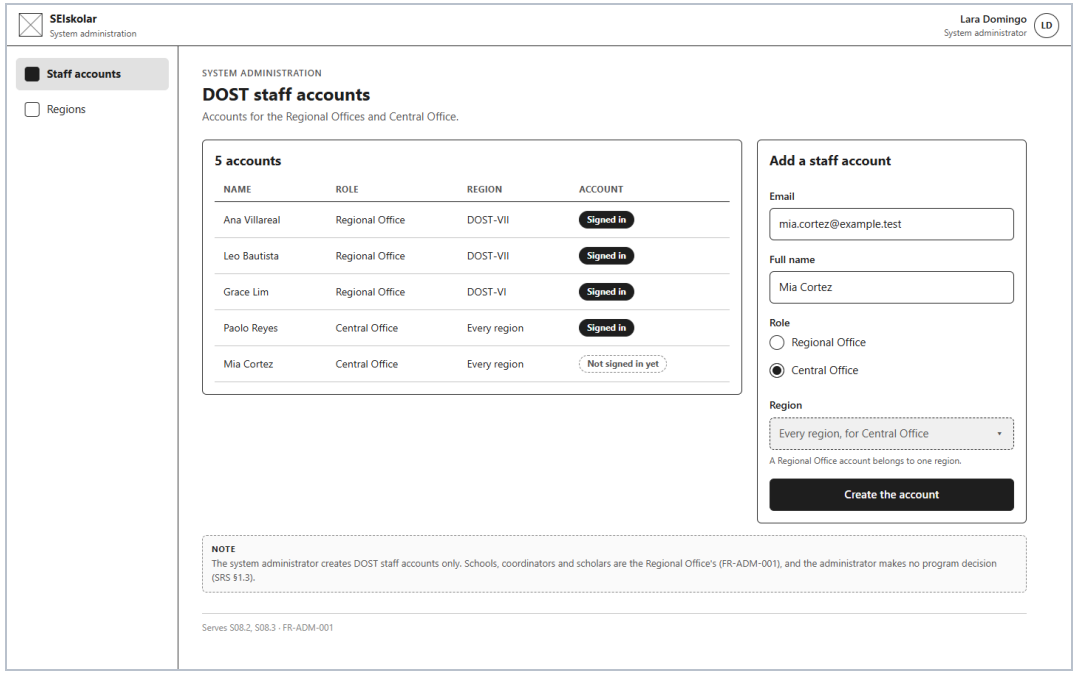

Desktop · 1440 px

Repository: `03-low-fidelity/admin-staff-accounts.html` · Figma: page 03 Low-fidelity, section admin-staff-accounts.html, frames `admin-staff-accounts.phone`, `.tablet`, `.desktop`

LOW-FIDELITY WIREFRAME 29 OF 29

Administrator: regions

Owner: Dorothy Biatriz Capao (@dbeenutsz)

Serves S08.1 · SRS §4.1 "Maintain Reference Data" · Swimlane 08 · Finished on page **126**

NOTE The fields are the SRS's regions table (§4.3). A region stops being used on its end date.

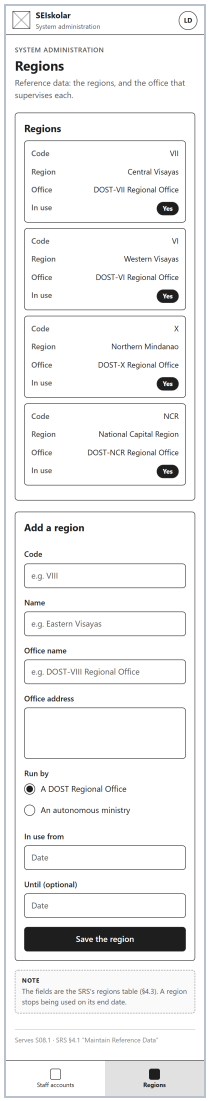

Phone · 360 px

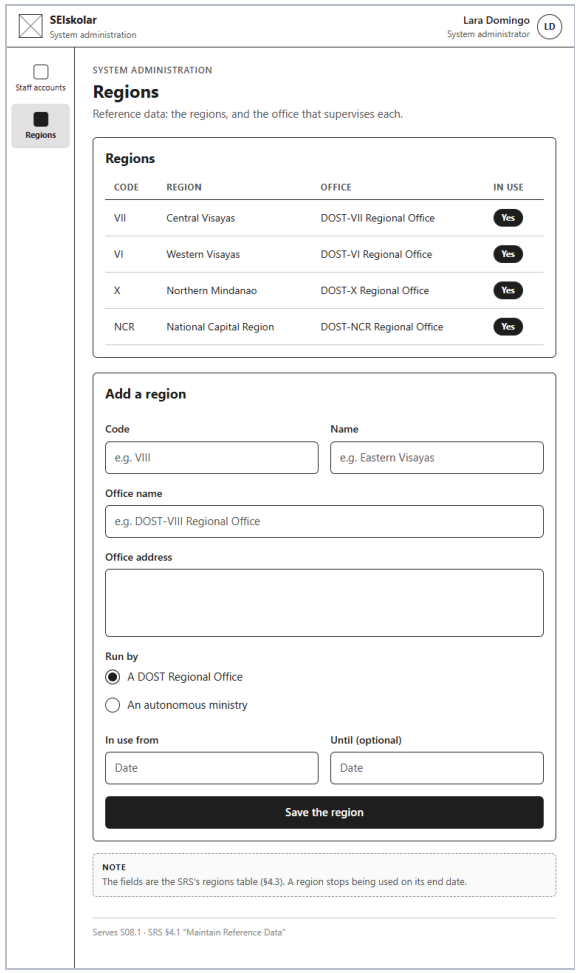

Tablet · 768 px

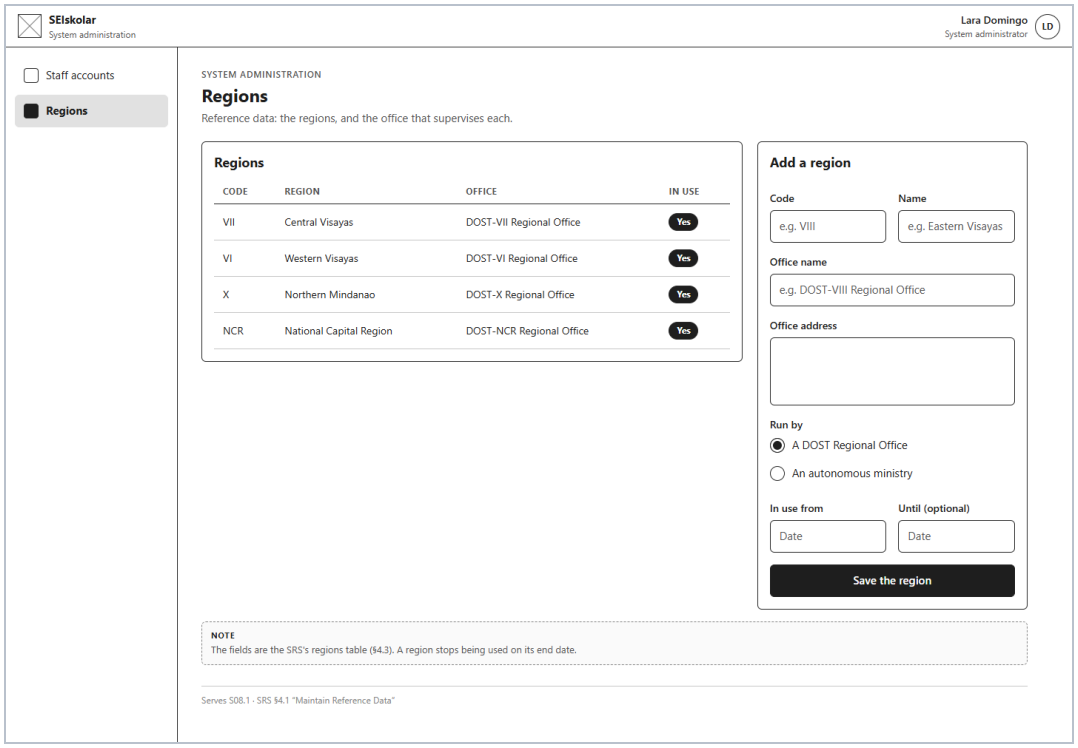

Desktop · 1440 px

Repository: `03-low-fidelity/admin-regions.html` · Figma: page 03 Low-fidelity, section admin-regions.html, frames `admin-regions.phone`, `.tablet`, `.desktop`

C High-fidelity screens

The finished screens: each wireframe drawn for real, with colour, type and working links. Together they are a clickable prototype. 29 screens in 42 states, 126 pictures.

Each screen has its wireframe's file name, content and states. Inside a school's portal the colours are the school's, as its coordinator set them (FR-ADM-003): CIT-U's maroon and gold; in the DOST console they are SEIskolar's navy. Every screen meets WCAG 2.1 AA (NFR-ACC-001): text contrast of at least 4.5:1, borders of fields and buttons at 3:1, tap targets of at least 44 px, a visible focus outline, and nothing that scrolls sideways at 360 px. In the prototype, a button that would save something says what happened instead, because nothing is saved, and the grade lines work out their weighted average as the scholar types (FR-SCH-003).

#	Screen	States	Serves	Owner	Wireframe · screen
1	Sign in	school, console, wrong password	S01.1 to S01.4, S08.8	Genril Theo Soroño	41 · 85
2	Account not ready	one	S01.5, S01.6	Genril Theo Soroño	44 · 88
3	Nothing to show	one	S01.9, S01.10, S01.12	Genril Theo Soroño	45 · 89
4	Scholar: dashboard	one	S01.8, S02.8 to S02.11, S03.1 to S03.3, S08.12	Genril Theo Soroño	46 · 90
5	Scholar: a requirement	not started, returned, verified	S01.11, S03.3 to S03.10, S04.10, S04.11, S09.6	Genril Theo Soroño	47 · 91
6	Scholar: stipend and tuition	one	S05.12, S05.13, S06.12, S07.9	Althea Maeve Kinaadman	50 · 94
7	Coordinator: home	one	S04.12	Zedric Camilotes	51 · 95
8	Coordinator: academic calendar	one	S02.1, S02.2, S02.4	Dorothy Biatriz Capao	52 · 96
9	Coordinator: requirement names	one	S02.3, S02.4	Dorothy Biatriz Capao	53 · 97
10	Coordinator: tuition remittances	check, crediting	S06.3 to S06.11, S06.13	Althea Maeve Kinaadman	54 · 98
11	Coordinator: portal settings	one	S09.1 to S09.3	Althea Maeve Kinaadman	56 · 100
12	Regional Office: home	one	S04.1	Zedric Camilotes	57 · 101
13	Regional Office: checklist and deadline	one	S02.5 to S02.7	Zedric Camilotes	58 · 102
14	Regional Office: queue	one	S04.2, S04.3	Zedric Camilotes	59 · 103
15	Regional Office: check a filing	unclaimed, claimed, returning	S04.3 to S04.9	Zedric Camilotes	60 · 104
16	Regional Office: release batches	draft, returned	S05.1 to S05.5, S05.8, S05.13	Adrian Seth Tabotabo	63 · 107
17	Regional Office: tuition remittances	record, disputed	S06.1, S06.2, S06.5, S06.13	Althea Maeve Kinaadman	65 · 109
18	Regional Office: benefit proposals	one	S07.1, S07.2, S07.5	Adrian Seth Tabotabo	67 · 111
19	Regional Office: schools	one	S08.4	Dorothy Biatriz Capao	68 · 112
20	Regional Office: accounts	scholars, coordinators	S08.5 to S08.7	Dorothy Biatriz Capao	69 · 113
21	Regional Office: transfers	one	S08.9 to S08.11, S08.13	Dorothy Biatriz Capao	71 · 115
22	A record's history	one	S10.5 to S10.8	Zedric Camilotes	72 · 116

#	Screen	States	Serves	Owner	Wireframe · screen
23	Central Office: release batches	one	S05.6	Adrian Seth Tabotabo	73 · 117
24	Central Office: a release batch	review, approved	S05.6 to S05.11	Adrian Seth Tabotabo	74 · 118
25	Central Office: benefits	benefits, rules, scholar	S07.7, S07.8	Adrian Seth Tabotabo	76 · 120
26	Central Office: proposals	one	S07.3, S07.4, S07.6	Adrian Seth Tabotabo	79 · 123
27	Central Office: thresholds	one	S09.4, S09.5	Althea Maeve Kinaadman	80 · 124
28	Administrator: DOST staff accounts	one	S08.2, S08.3	Genril Theo Soroño	81 · 125
29	Administrator: regions	one	S08.1	Dorothy Biatriz Capao	82 · 126

HIGH-FIDELITY SCREEN 1 OF 29

Sign in

School · state 1 of 3

Owner: Genril Theo Soroño (@gnthril)

Serves S01.1 to S01.4, S08.8 · FR-IAM-001, FR-IAM-002 · Swimlanes 01, 08 · Wireframe on page **41**

THE WIREFRAME'S NOTE The address picks this screen (S01.2): a school's portal address shows that school's portal, and the DOST console's address shows the console. The address grants nothing; the account's role, region and school decide what it sees (FR-IAM-002, FR-IAM-003).

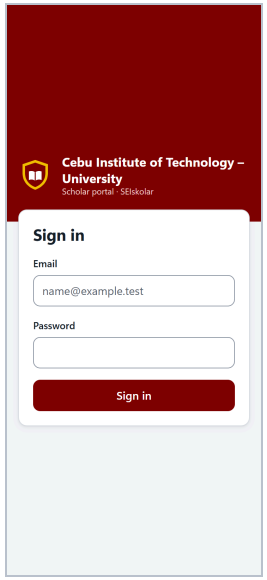

Phone · 360 px

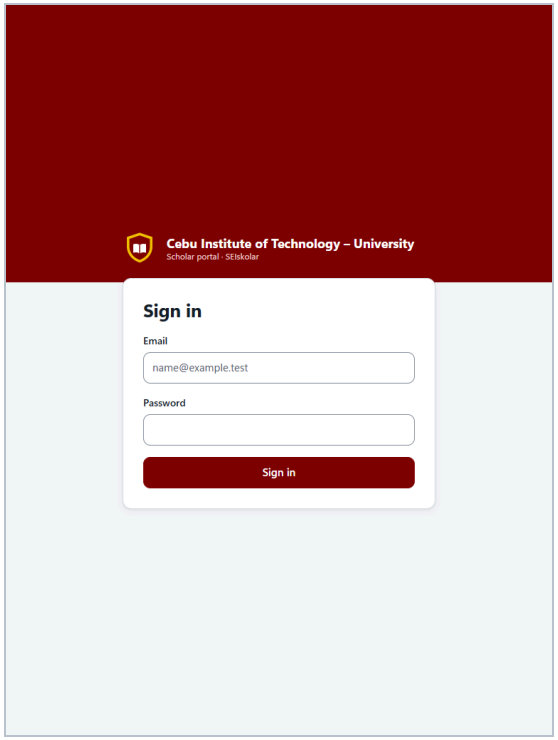

Tablet · 768 px

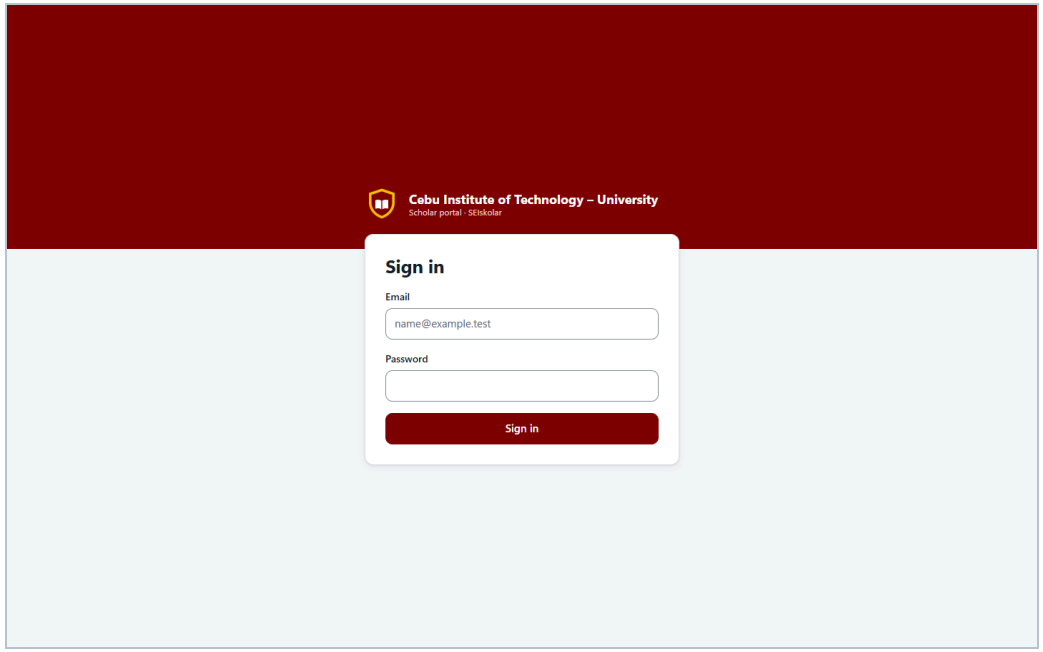

Desktop · 1440 px

Repository: `04-high-fidelity/sign-in.html?state=school` · Figma: page 04 High-fidelity, section sign-in.html, frames `sign-in--school.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 1 OF 29

Sign in

Console · state 2 of 3

Owner: Genril Theo Soroño (@gnthril)

Serves S01.1 to S01.4, S08.8 · FR-IAM-001, FR-IAM-002 · Swimlanes 01, 08 · Wireframe on page **42**

THE WIREFRAME'S NOTE The address picks this screen (S01.2): a school's portal address shows that school's portal, and the DOST console's address shows the console. The address grants nothing; the account's role, region and school decide what it sees (FR-IAM-002, FR-IAM-003).

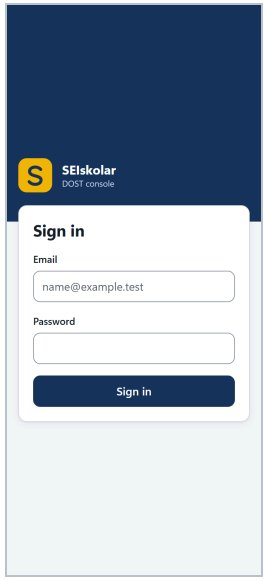

Phone · 360 px

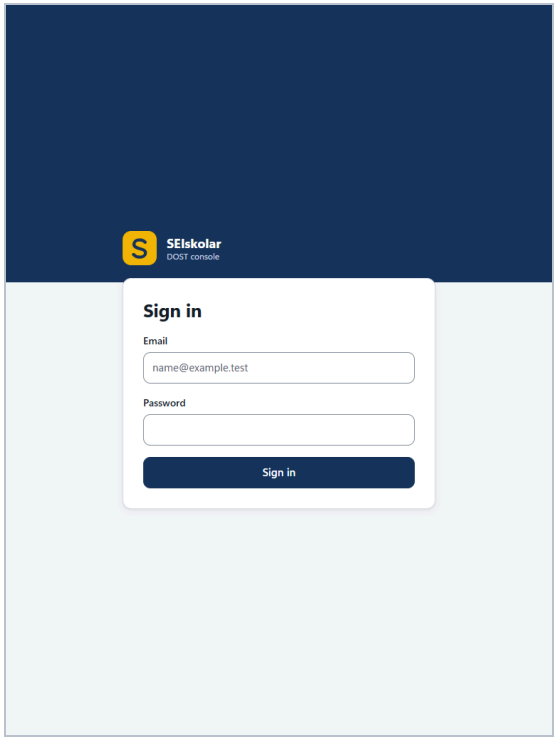

Tablet · 768 px

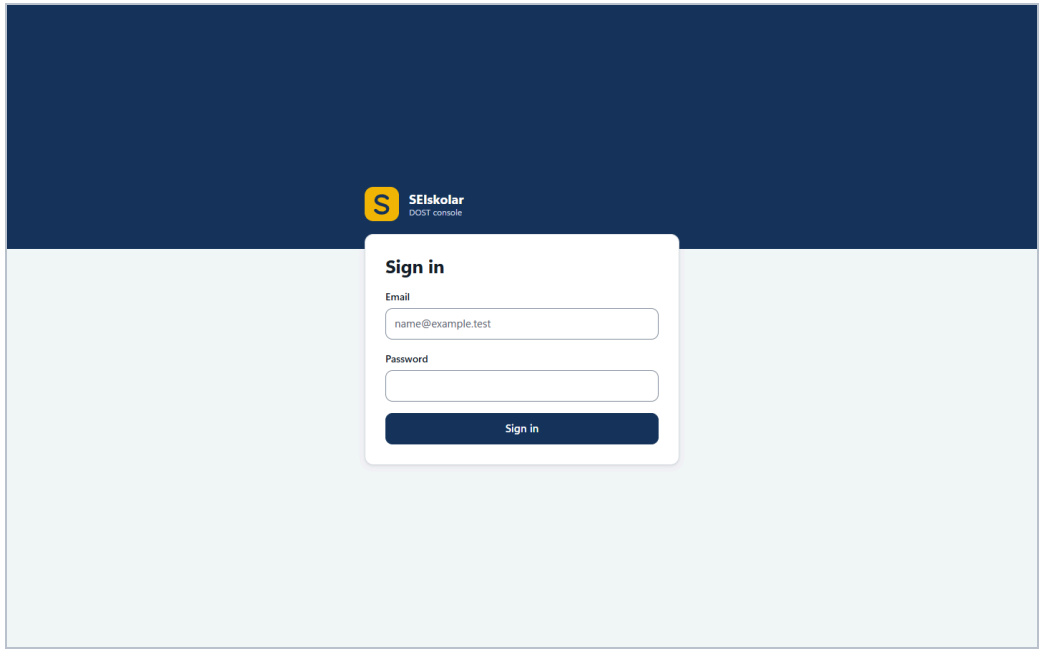

Desktop · 1440 px

Repository: `04-high-fidelity/sign-in.html?state=console` · Figma: page 04 High-fidelity, section sign-in.html, frames `sign-in--console.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 1 OF 29

Sign in

Wrong Password · state 3 of 3

Owner: Genril Theo Soroño (@gnthril)

Serves S01.1 to S01.4, S08.8 · FR-IAM-001, FR-IAM-002 · Swimlanes 01, 08 · Wireframe on page **43**

THE WIREFRAME'S NOTE The address picks this screen (S01.2): a school's portal address shows that school's portal, and the DOST console's address shows the console. The address grants nothing; the account's role, region and school decide what it sees (FR-IAM-002, FR-IAM-003).

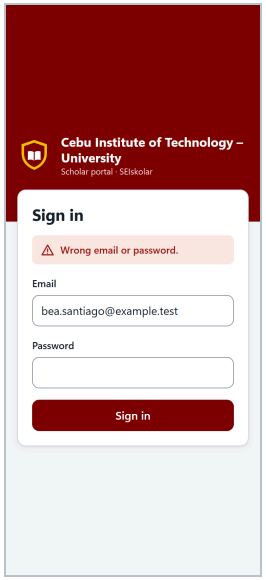

Phone · 360 px

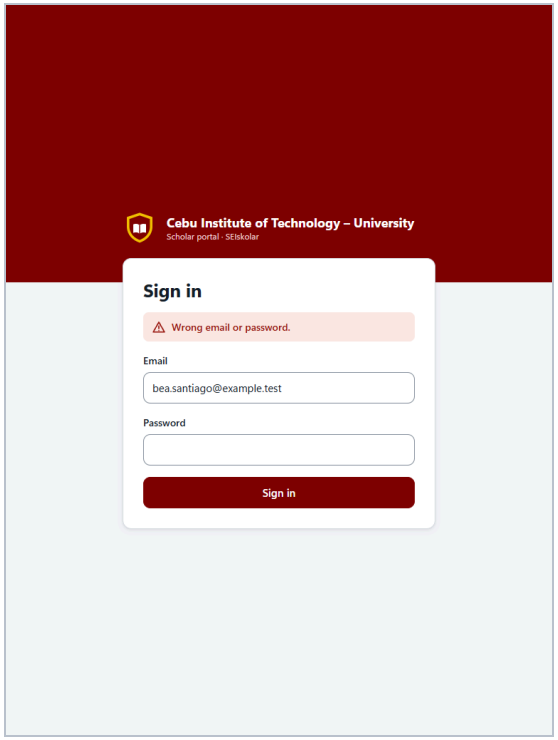

Tablet · 768 px

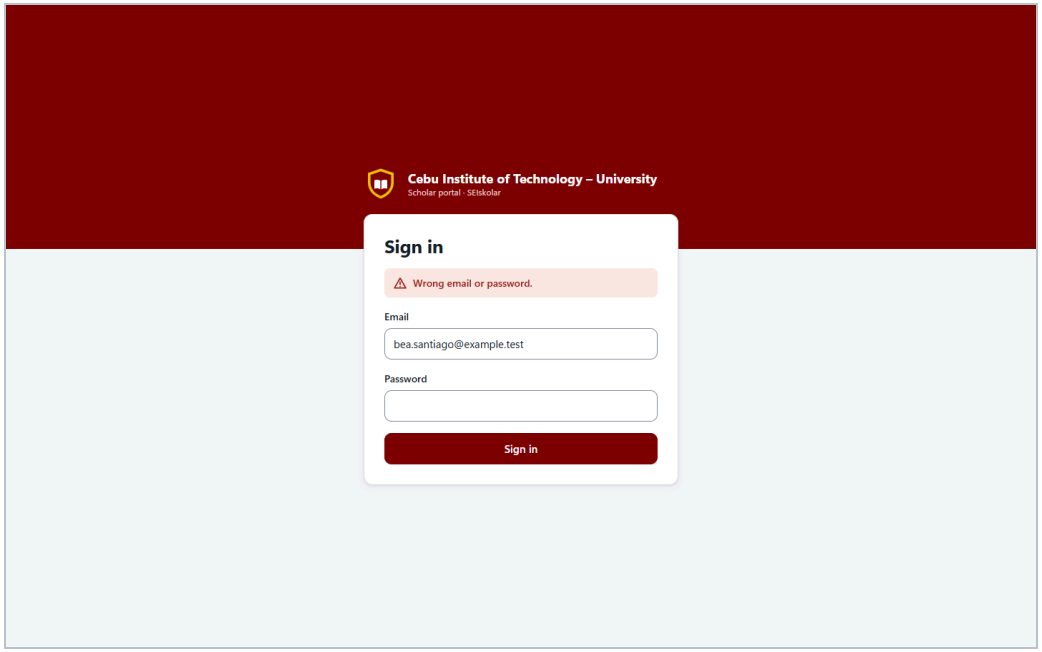

Desktop · 1440 px

Repository: `04-high-fidelity/sign-in.html?state=wrong-password` · Figma: page 04 High-fidelity, section sign-in.html, frames `sign-in--wrong-password.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 2 OF 29

Account not ready

Owner: Genril Theo Soroño (@gnthril)

Serves S01.5, S01.6 · FR-IAM-001 · Swimlane 01 · Wireframe on page **44**

THE WIREFRAME'S NOTE Without a role, region and school, SEIskolar returns no records at all (FR-IAM-001, S01.6). Pointing the person to their Regional Office is our wording; the SRS says only that every list is empty.

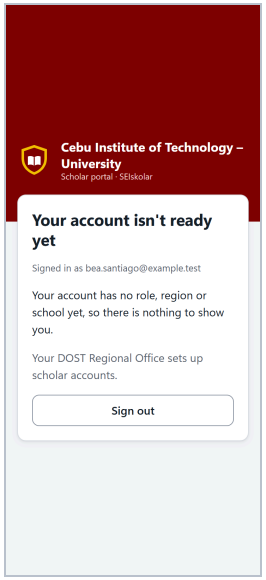

Phone · 360 px

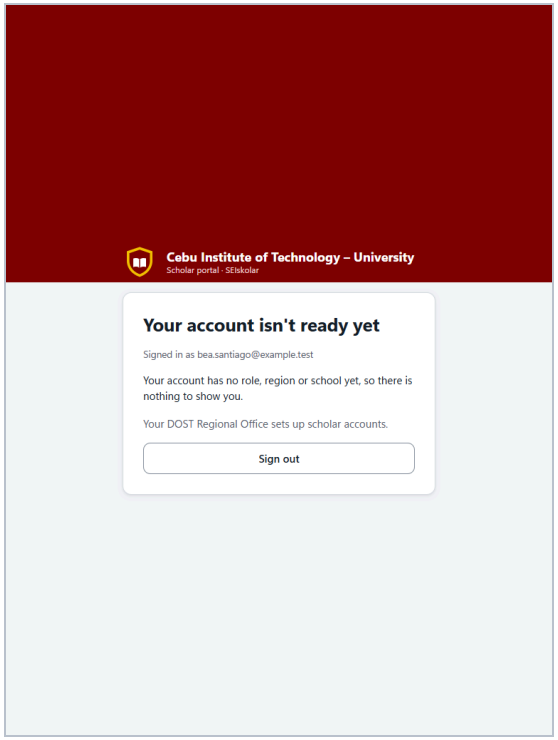

Tablet · 768 px

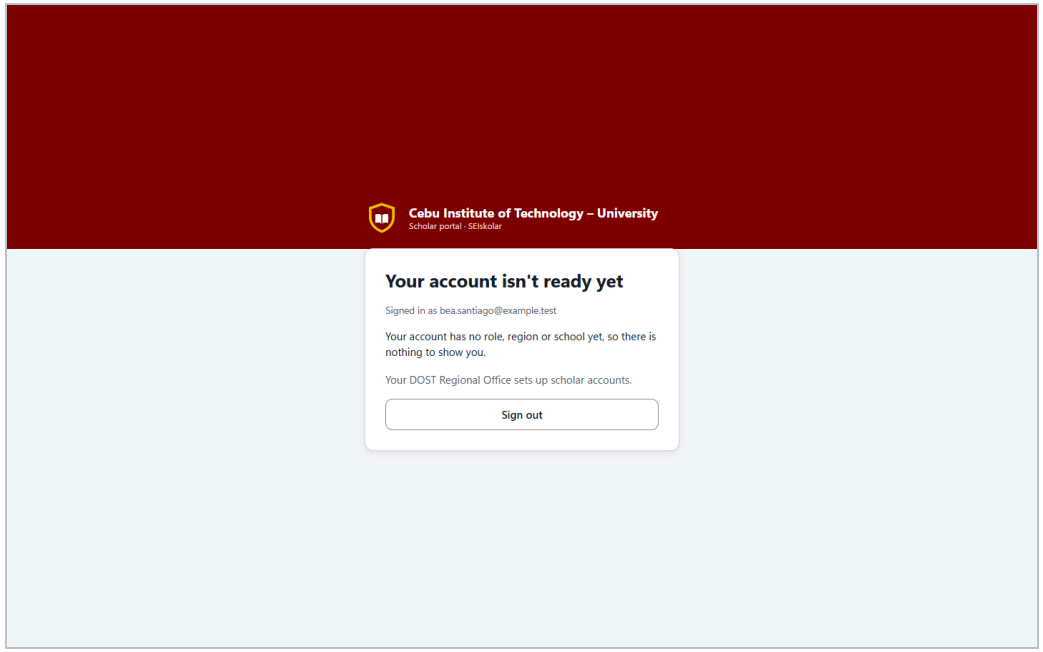

Desktop · 1440 px

Repository: `04-high-fidelity/no-access.html` · Figma: page 04 High-fidelity, section no-access.html, frames `no-access.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 3 OF 29

Nothing to show

Owner: Genril Theo Soroño (@gnthril)

Serves S01.9, S01.10, S01.12 · FR-IAM-003 · Swimlane 01 · Wireframe on page **45**

THE WIREFRAME'S NOTE SEIskolar returns no rows rather than an error (FR-IAM-003), so this page cannot tell "does not exist" from "not yours", and must not hint which.

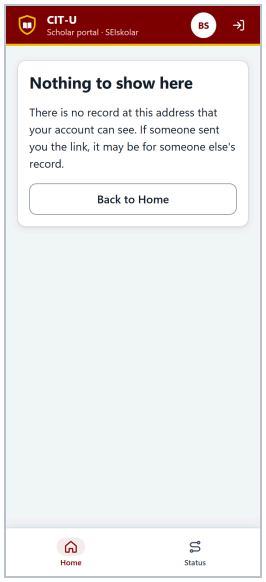

Phone · 360 px

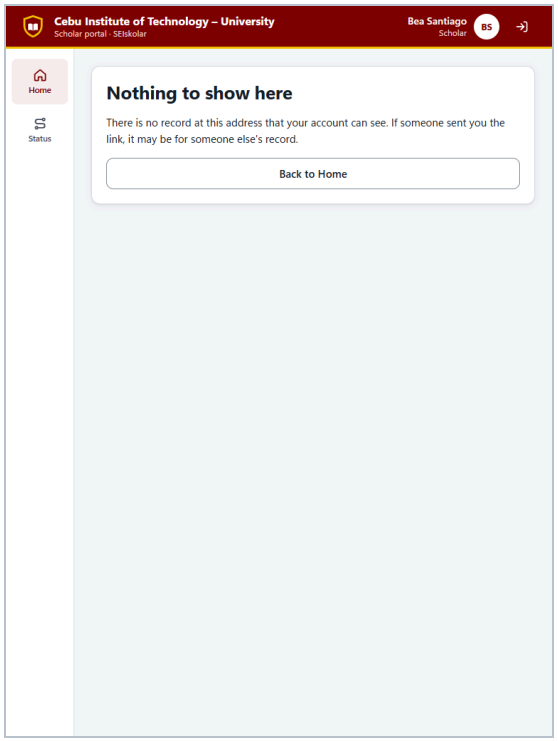

Tablet · 768 px

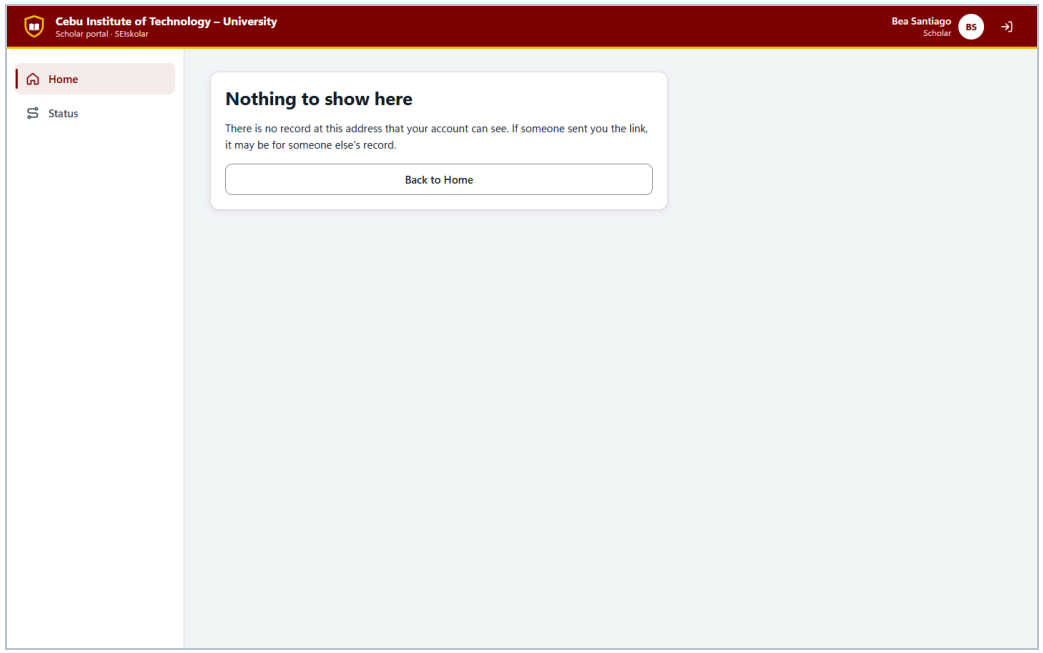

Desktop · 1440 px

Repository: `04-high-fidelity/nothing-found.html` · Figma: page 04 High-fidelity, section nothing-found.html, frames `nothing-found.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 4 OF 29

Scholar: dashboard

Owner: Genril Theo Soroño (@gnthril)

Serves S01.8, S02.8 to S02.11, S03.1 to S03.3, S08.12 · FR-SCH-001 · Swimlanes 01, 02, 03, 08 · Wireframe on page **46**

THE WIREFRAME'S NOTES

- The banner has four states (FR-SCH-001): open with something outstanding, as here; open with everything cleared; closed with something outstanding, which says "Nothing is forfeited — file now, and what you are owed is released with a later batch."; and closed with everything cleared. With no deadline set there is no banner (S02.11). Days count in Philippine time.
- Each requirement shows its school's name, with DOST's name under it (S02.3). A requirement opens its own screen.

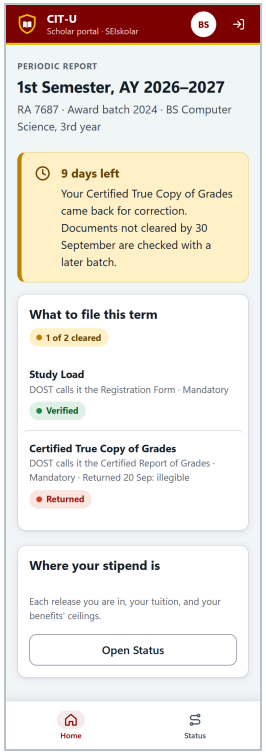

Phone · 360 px

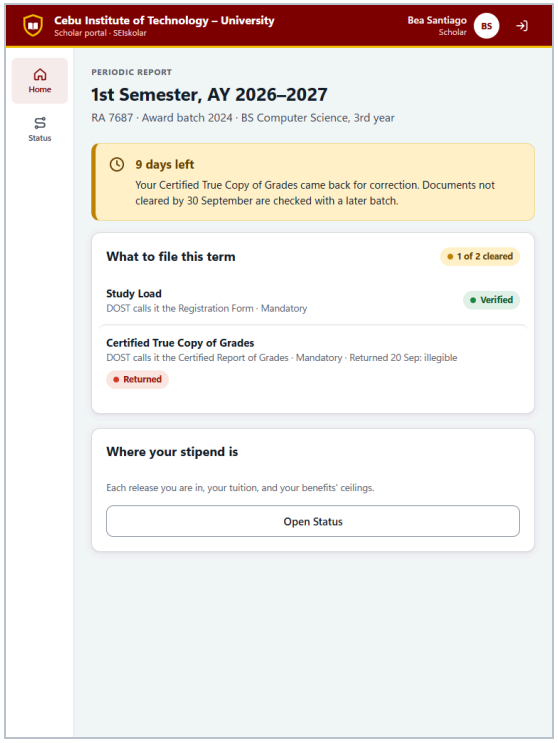

Tablet · 768 px

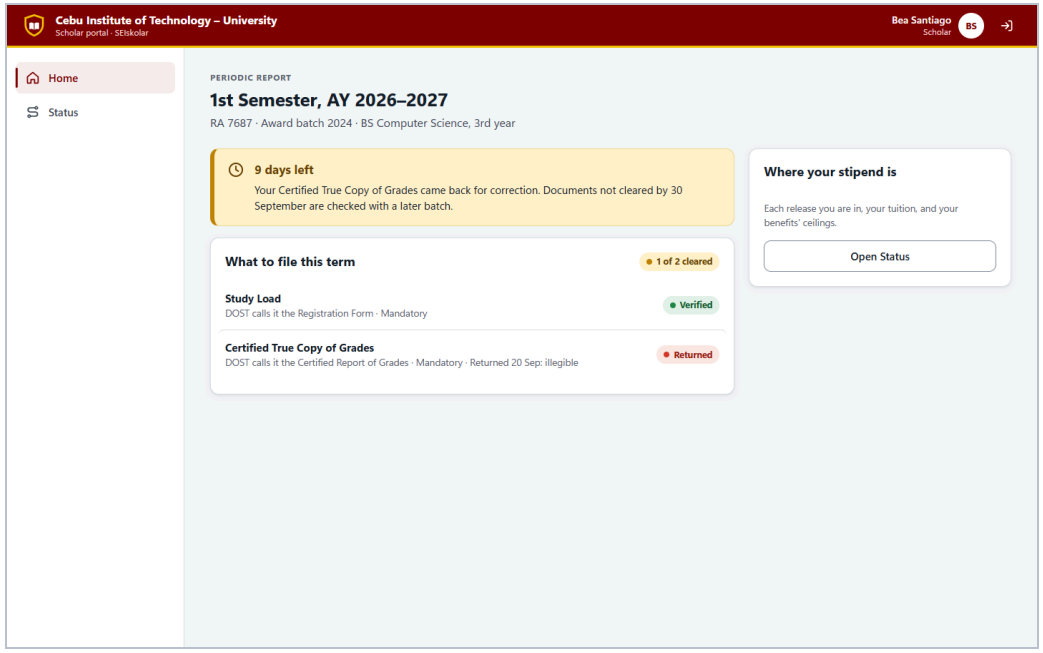

Desktop · 1440 px

Repository: `04-high-fidelity/scholar-dashboard.html` · Figma: page 04 High-fidelity, section scholar-dashboard.html, frames `scholar-dashboard.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 5 OF 29

Scholar: a requirement

Not Started · state 1 of 3

Owner: Genril Theo Soroño (@gnthril)

Serves S01.11, S03.3 to S03.10, S04.10, S04.11, S09.6 · FR-SCH-002, FR-SCH-003, FR-SCH-004, FR-ADM-003 · Swimlanes 01, 03, 04, 09 · Wireframe on page **47**

THE WIREFRAME'S NOTES

- Up to 30 lines; units more than 0 and at most 15; grades inside the school's scale (FR-SCH-003). If the file or a line is not allowed, the screen says what to fix (S03.6). A line may show that it passes, and the average whether it meets the threshold, but never a verdict on standing (FR-ADM-003).
- Filing never replaces an earlier version (S03.9). The file goes straight to private storage, through a link that lasts five minutes (S03.8).

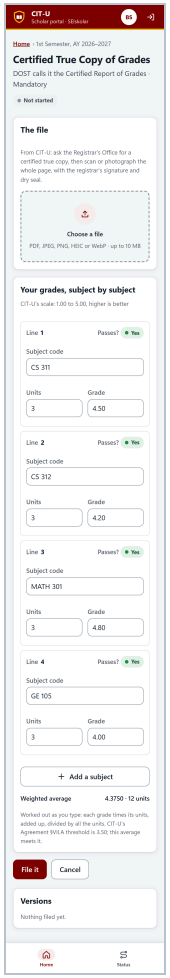

Phone · 360 px

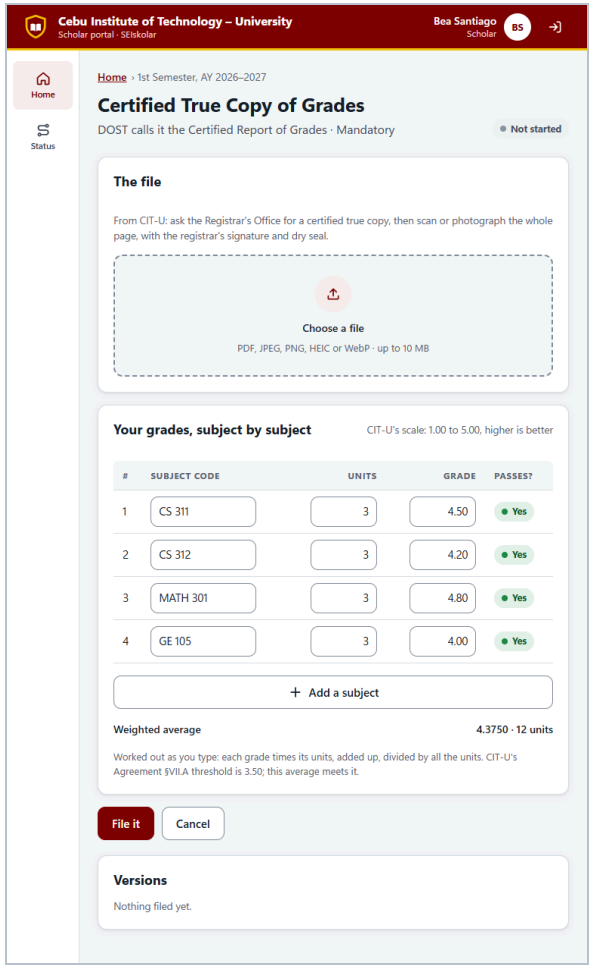

Tablet · 768 px

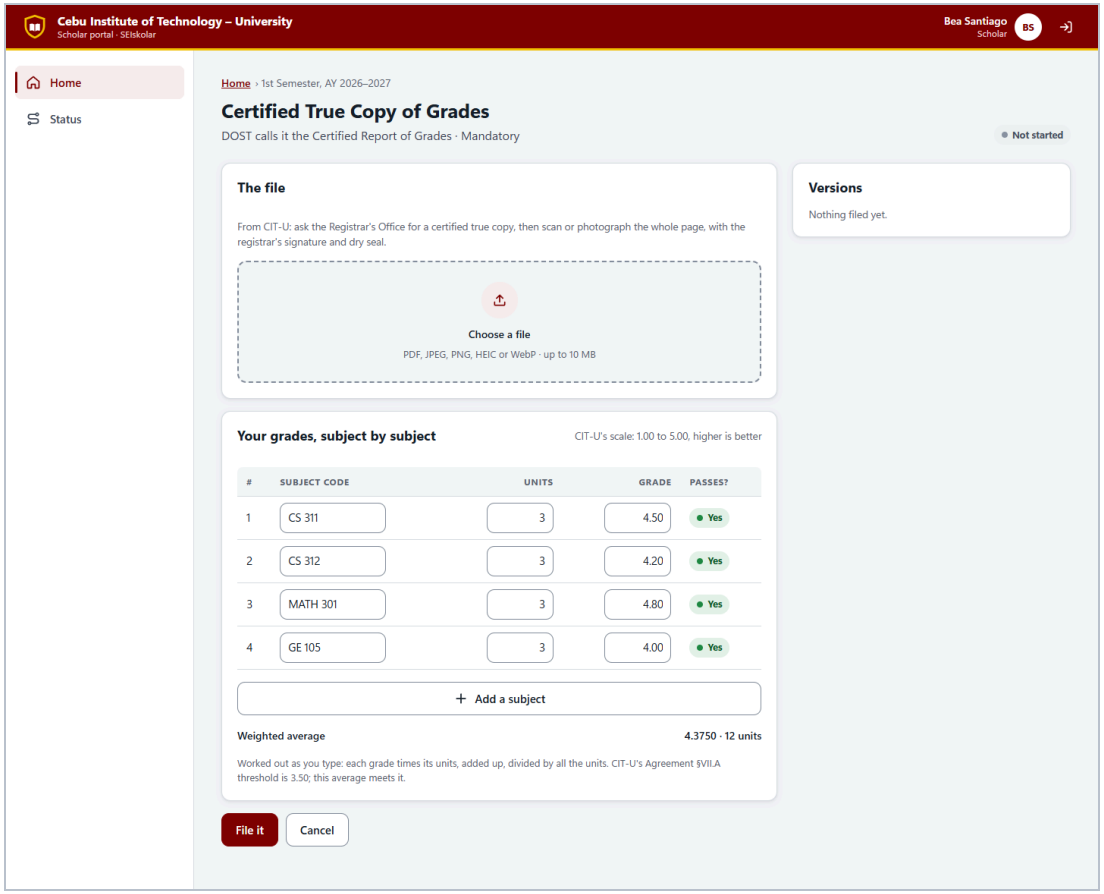

Desktop · 1440 px

Repository: `04-high-fidelity/scholar-requirement.html?state=not-started` · Figma: page 04 High-fidelity, section scholar-requirement.html, frames `scholar-requirement--not-started.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 5 OF 29

Scholar: a requirement

Returned · state 2 of 3

Owner: Genril Theo Soroño (@gnthril)

Serves S01.11, S03.3 to S03.10, S04.10, S04.11, S09.6 · FR-SCH-002, FR-SCH-003, FR-SCH-004, FR-ADM-003 · Swimlanes 01, 03, 04, 09 · Wireframe on page **48**

THE WIREFRAME'S NOTES

- Up to 30 lines; units more than 0 and at most 15; grades inside the school's scale (FR-SCH-003). If the file or a line is not allowed, the screen says what to fix (S03.6). A line may show that it passes, and the average whether it meets the threshold, but never a verdict on standing (FR-ADM-003).
- Filing never replaces an earlier version (S03.9). The file goes straight to private storage, through a link that lasts five minutes (S03.8).

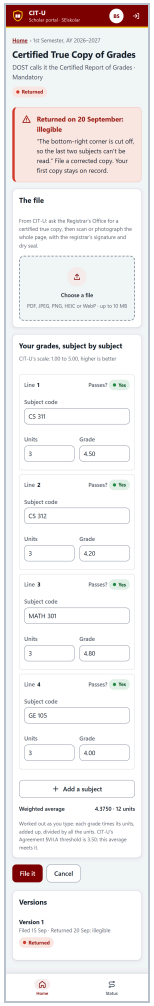

Phone · 360 px

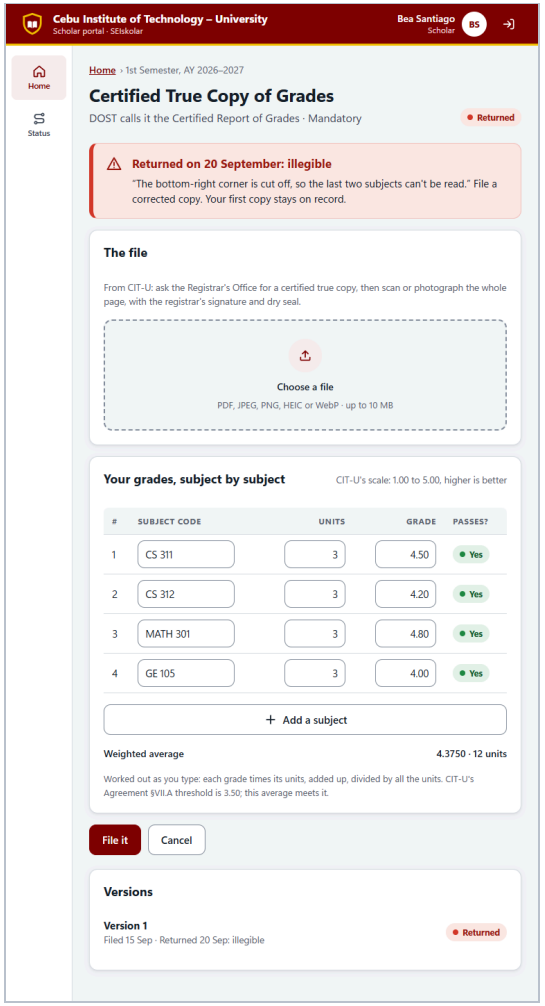

Tablet · 768 px

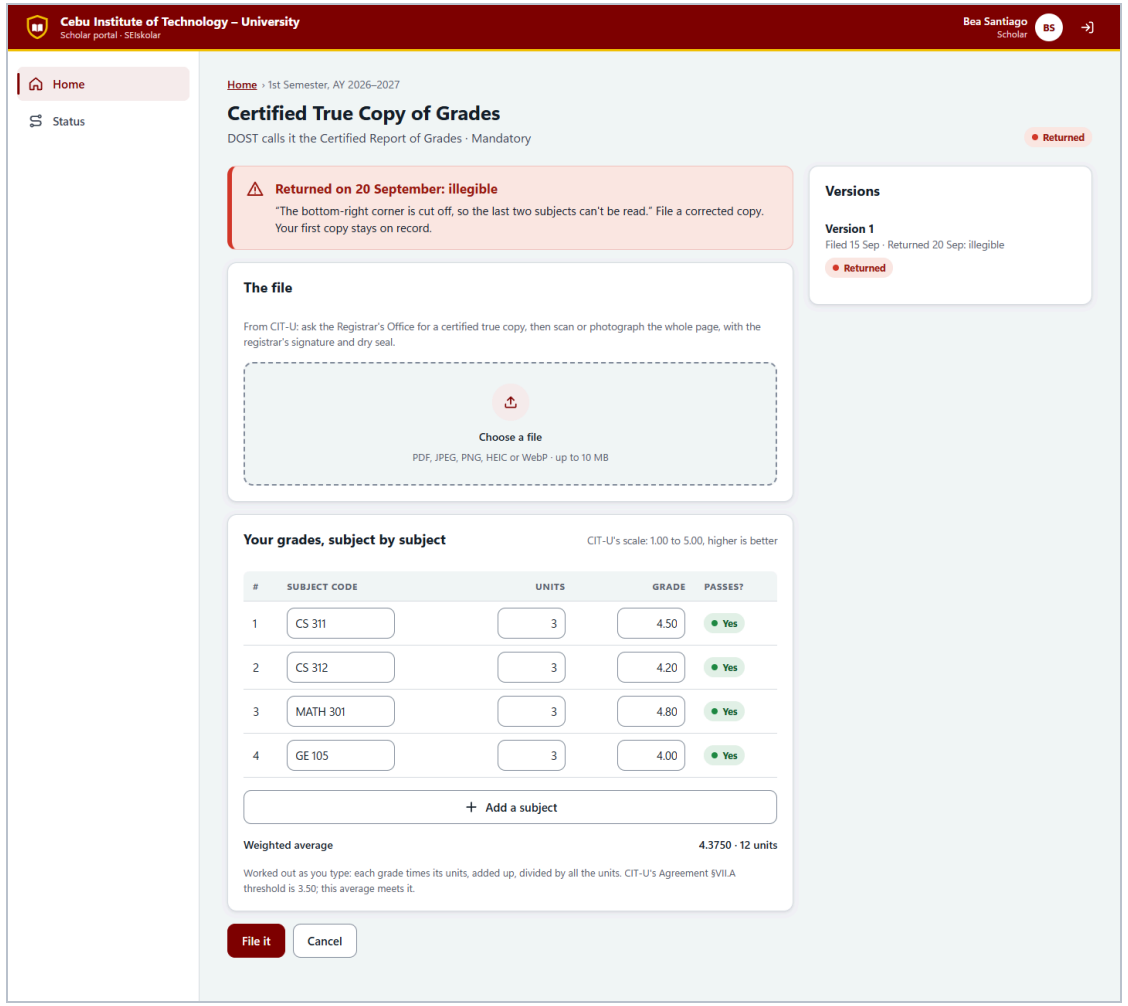

Desktop · 1440 px

Repository: `04-high-fidelity/scholar-requirement.html?state=returned` · Figma: page 04 High-fidelity, section scholar-requirement.html, frames `scholar-requirement--returned.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 5 OF 29

Scholar: a requirement

Verified · state 3 of 3

Owner: Genril Theo Soroño (@gnthril)

Serves S01.11, S03.3 to S03.10, S04.10, S04.11, S09.6 · FR-SCH-002, FR-SCH-003, FR-SCH-004, FR-ADM-003 · Swimlanes 01, 03, 04, 09 · Wireframe on page **49**

THE WIREFRAME'S NOTE Filing never replaces an earlier version (S03.9). The file goes straight to private storage, through a link that lasts five minutes (S03.8).

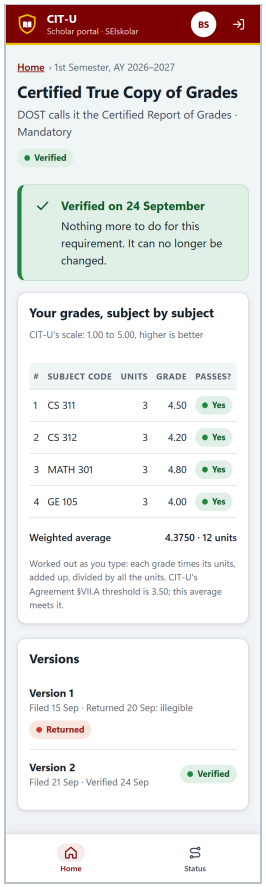

Phone · 360 px

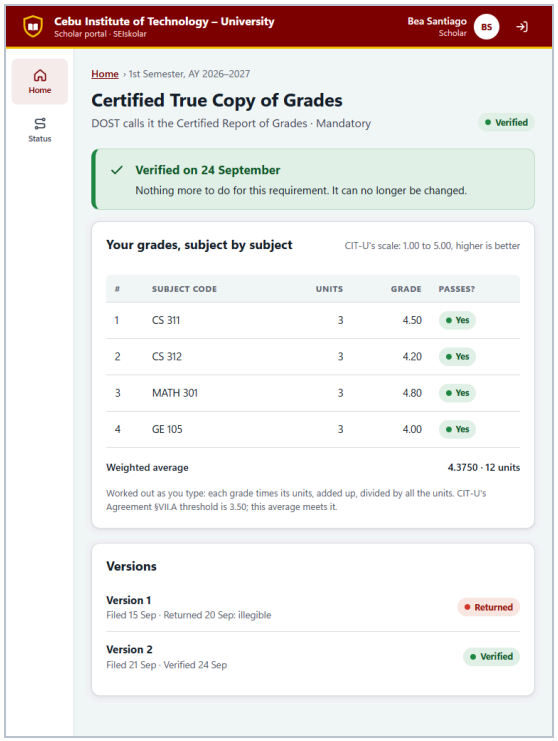

Tablet · 768 px

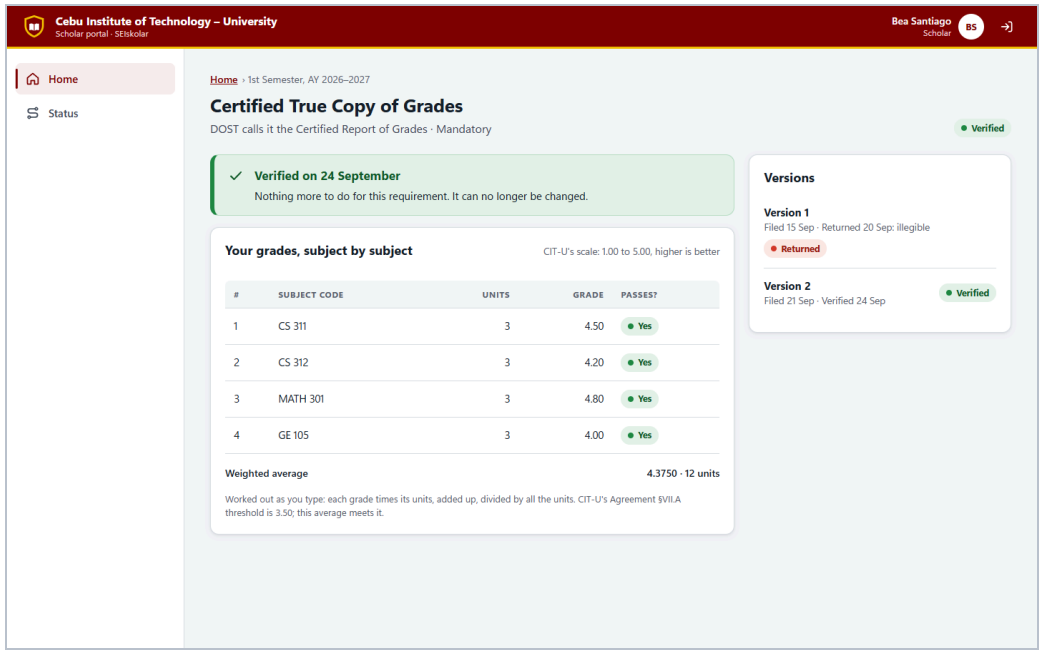

Desktop · 1440 px

Repository: `04-high-fidelity/scholar-requirement.html?state=verified` · Figma: page 04 High-fidelity, section scholar-requirement.html, frames `scholar-requirement--verified.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 6 OF 29

Scholar: stipend and tuition

Owner: Althea Maeve Kinaadman (@Tiamporado)

Serves S05.12, S05.13, S06.12, S07.9 · FR-REL-003, FR-TUI-003, FR-BEN-003 · Swimlanes 05, 06, 07 · Wireframe on page **50**

THE WIREFRAME'S NOTE Three ways off the path (FR-REL-003): moved to a later batch, if not cleared by the deadline or taken off the list; the batch returned to the Regional Office; or removed by Central Office, with its reason. Nothing is forfeited.

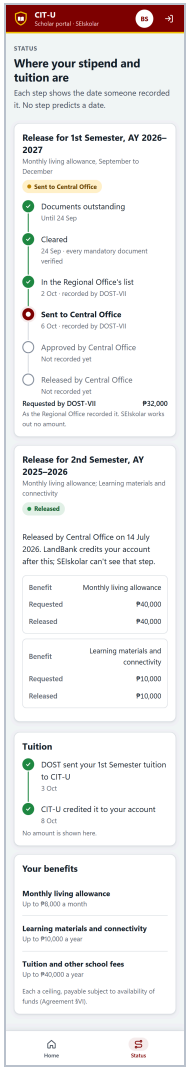

Phone · 360 px

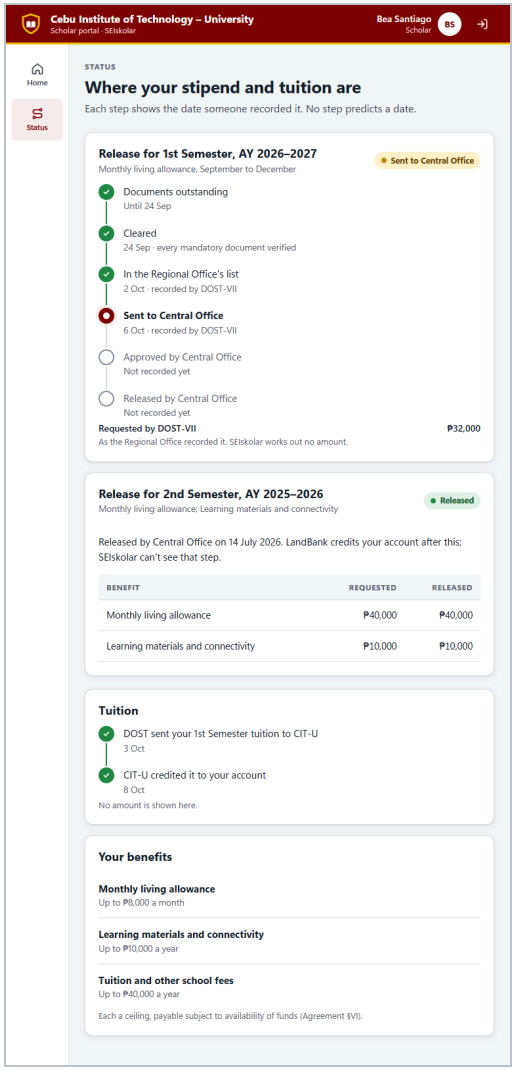

Tablet · 768 px

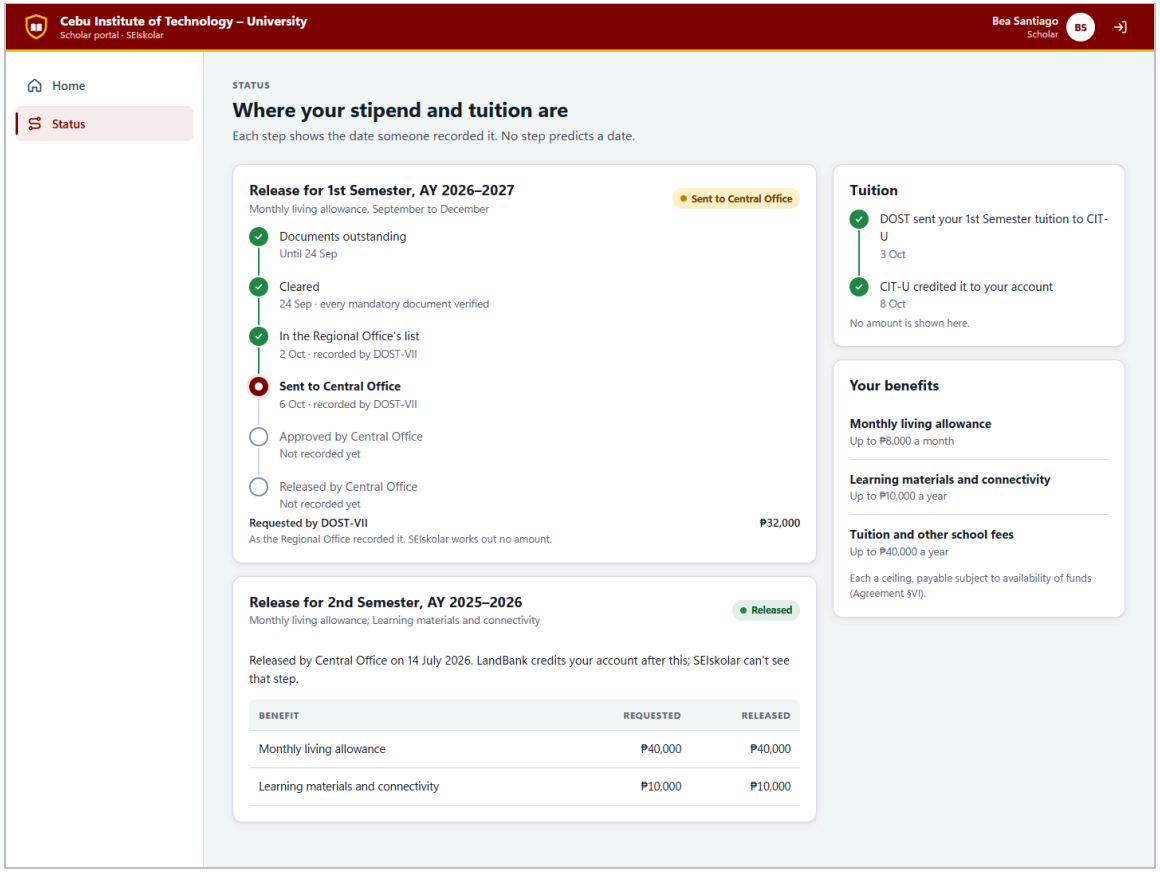

Desktop · 1440 px

Repository: `04-high-fidelity/scholar-status.html` · Figma: page 04 High-fidelity, section scholar-status.html, frames `scholar-status.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 7 OF 29

Coordinator: home

Owner: Zedric Camilotes (@zedric-git)

Serves S04.12 · FR-MON-001 · Swimlane 04 · Wireframe on page **51**

THE WIREFRAME'S NOTE Counts only, for this school and this term (FR-MON-001). A coordinator sees no other school's figures. They change as DOST-VII checks filings.

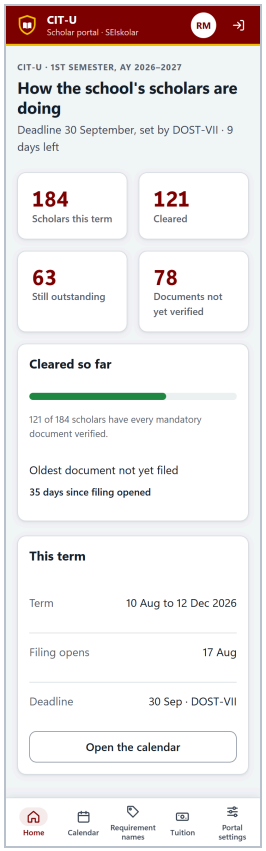

Phone · 360 px

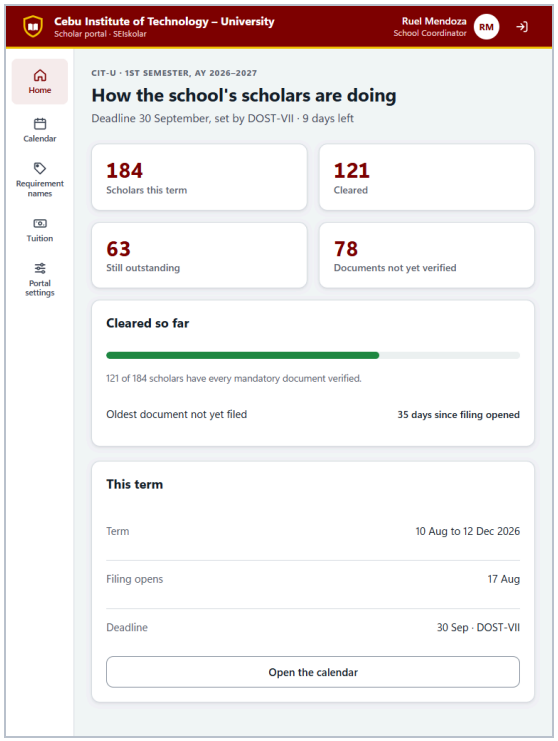

Tablet · 768 px

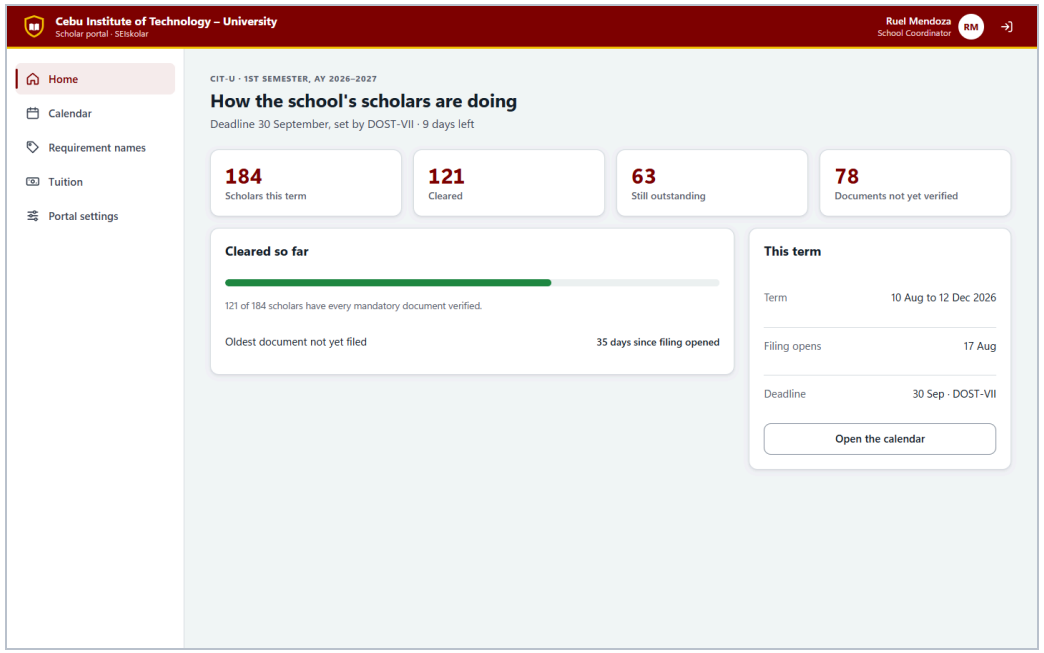

Desktop · 1440 px

Repository: `04-high-fidelity/coordinator-home.html` · Figma: page 04 High-fidelity, section coordinator-home.html, frames `coordinator-home.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 8 OF 29

Coordinator: academic calendar

Owner: Dorothy Biatriz Capao (@dbeenutsz)

Serves S02.1, S02.2, S02.4 · SRS §1.3; §4.1 "Configure Campus Terms" · Swimlane 02 · Wireframe on page **52**

THE WIREFRAME'S NOTE The coordinator runs the calendar; each term's checklist and deadline are the Regional Office's (SRS §1.3, S02.5 and S02.6).

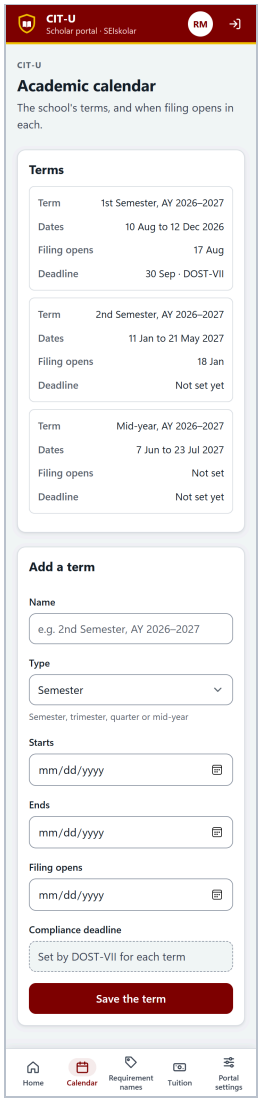

Phone · 360 px

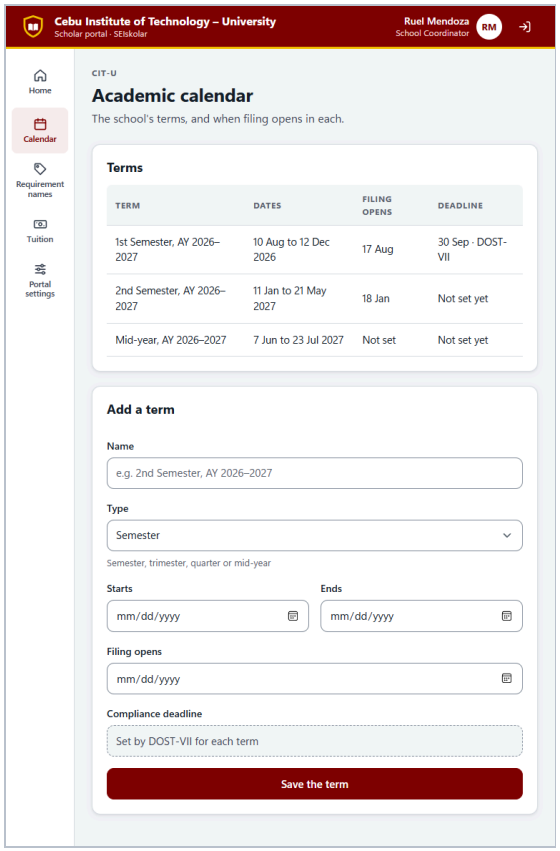

Tablet · 768 px

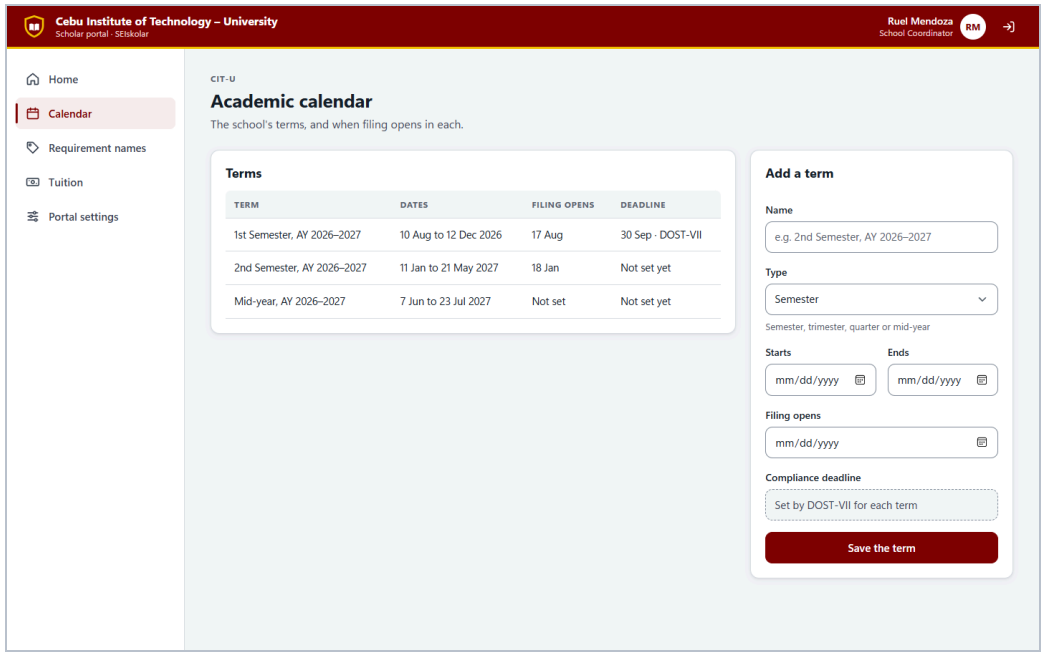

Desktop · 1440 px

Repository: `04-high-fidelity/coordinator-terms.html` · Figma: page 04 High-fidelity, section coordinator-terms.html, frames `coordinator-terms.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 9 OF 29

Coordinator: requirement names

Owner: Dorothy Biatriz Capao (@dbeenutsz)

Serves S02.3, S02.4 · SRS §4.1 “Customize Requirement Labels” · Swimlane 02 · Wireframe on page **53**

THE WIREFRAME’S NOTE Only the name and the instructions change here. DOST's list of requirements, and which ones a term needs, stay DOST's (S02.3, S02.5).

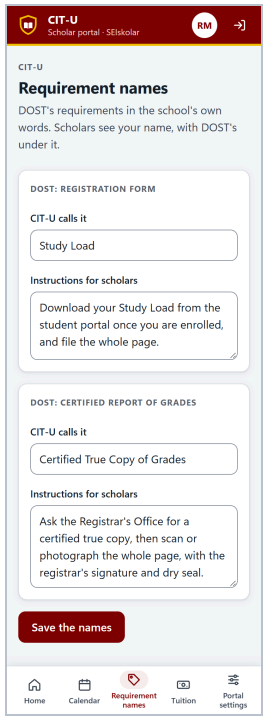

Phone · 360 px

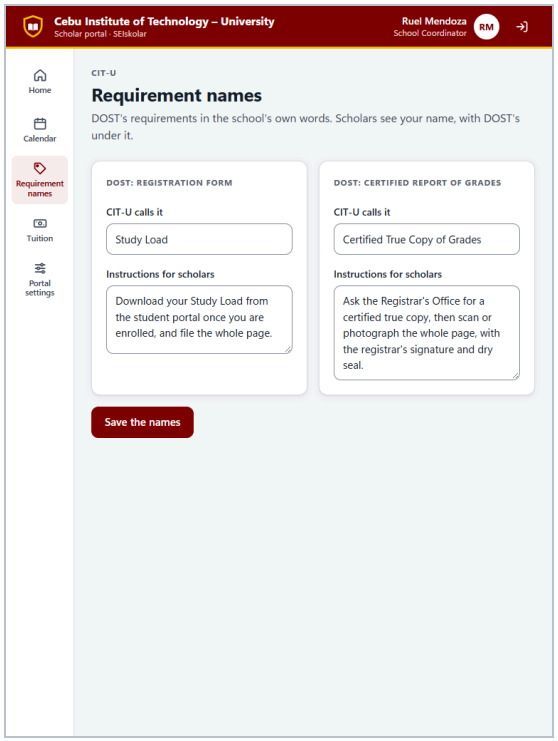

Tablet · 768 px

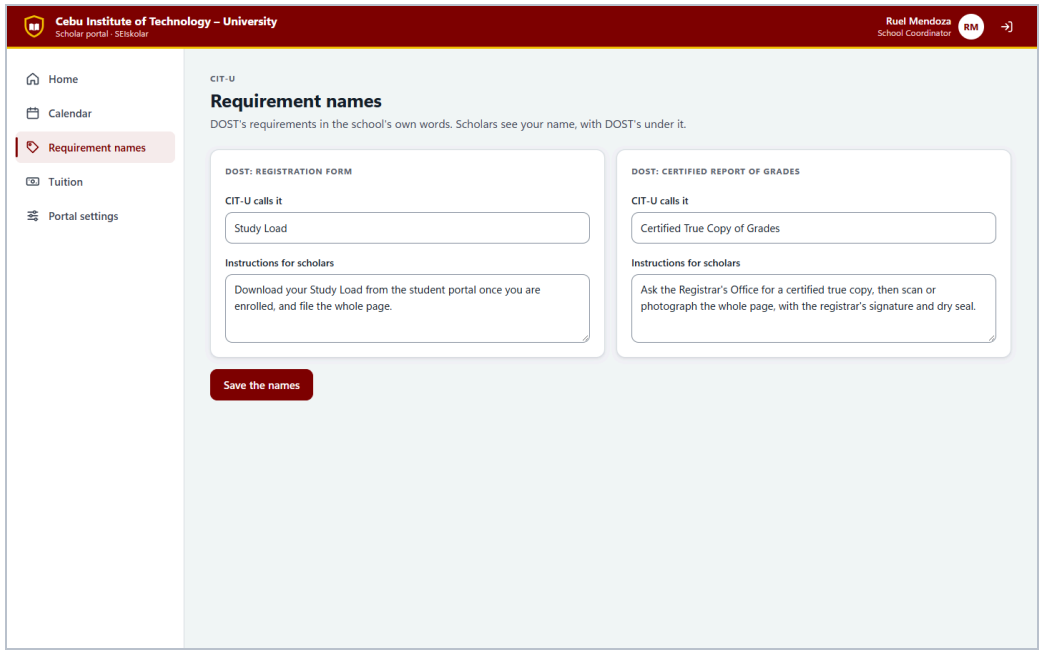

Desktop · 1440 px

Repository: `04-high-fidelity/coordinator-requirement-names.html` · Figma: page 04 High-fidelity, section coordinator-requirement-names.html, frames `coordinator-requirement-names.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 10 OF 29

Coordinator: tuition remittances

Check · state 1 of 2

Owner: Althea Maeve Kinaadman (@Tiamporado)

Serves S06.3 to S06.11, S06.13 · FR-TUI-002 · Swimlane 06 · Wireframe on page **54**

THE WIREFRAME'S NOTE Disputing needs a reason. DOST-VII then corrects the remittance and sends it again (S06.4, S06.5).

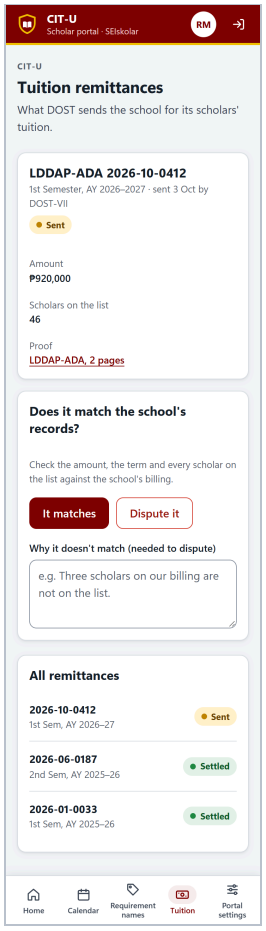

Phone · 360 px

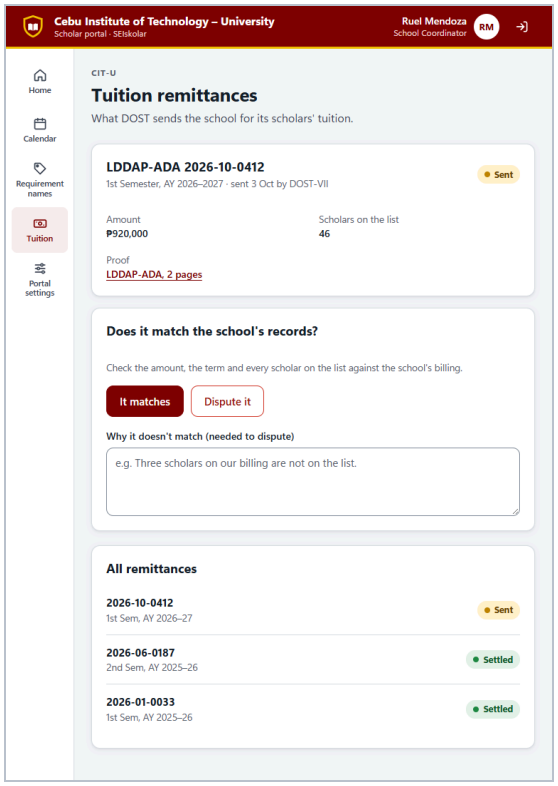

Tablet · 768 px

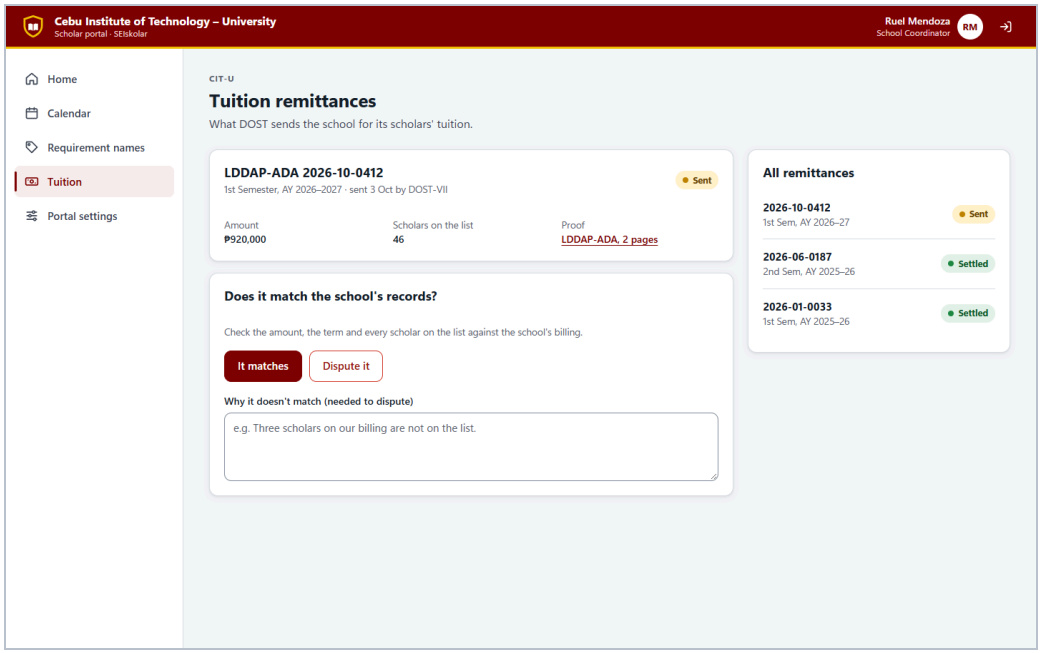

Desktop · 1440 px

Repository: `04-high-fidelity/coordinator-remittances.html?state=check` · Figma: page 04 High-fidelity, section coordinator-remittances.html, frames `coordinator-remittances--check.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 10 OF 29

Coordinator: tuition remittances

Crediting · state 2 of 2

Owner: Althea Maeve Kinaadman (@Tiamporado)

Serves S06.3 to S06.11, S06.13 · FR-TUI-002 · Swimlane 06 · Wireframe on page **55**

THE WIREFRAME'S NOTE Once every scholar on the list is credited, the remittance is settled (S06.9). A mismatch found now can still be disputed (S06.13).

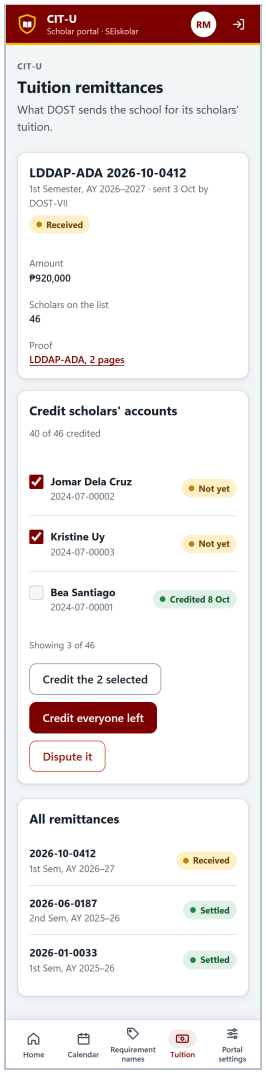

Phone · 360 px

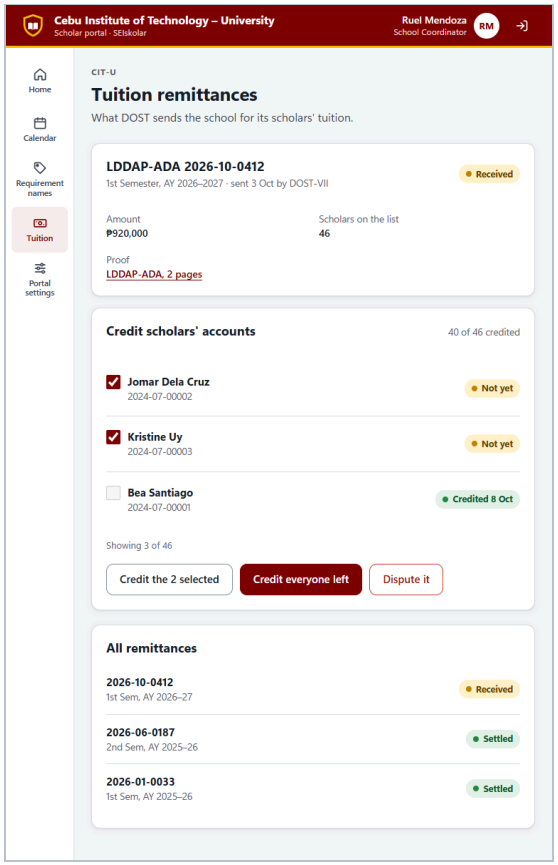

Tablet · 768 px

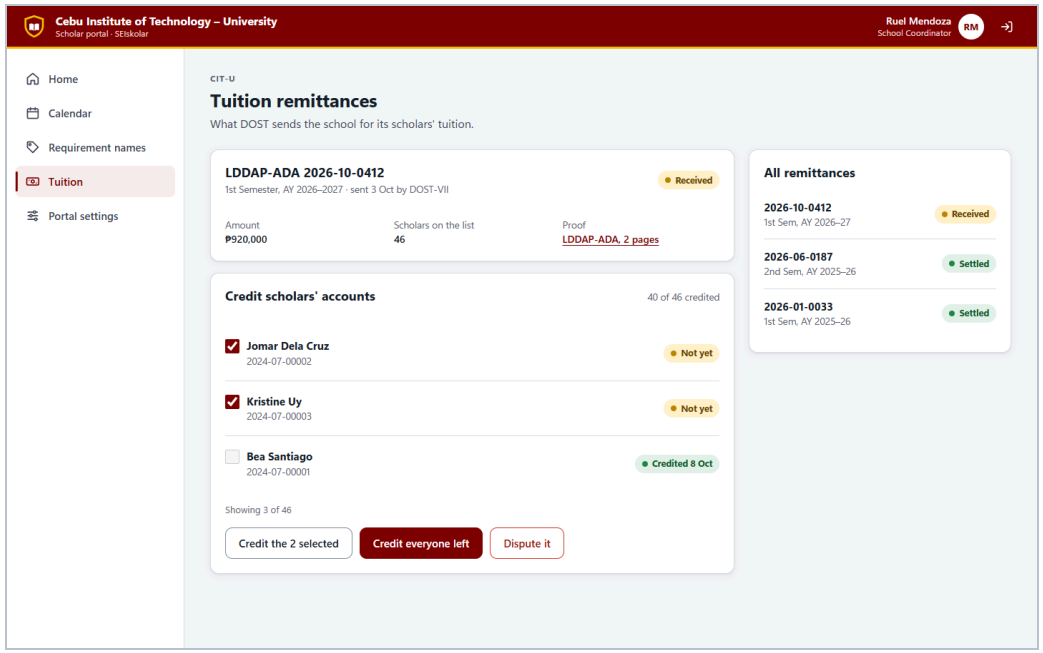

Desktop · 1440 px

Repository: `04-high-fidelity/coordinator-remittances.html?state=crediting` · Figma: page 04 High-fidelity, section coordinator-remittances.html, frames `coordinator-remittances--crediting.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 11 OF 29

Owner: Althea Maeve Kinaadman (@Tiamporado)

Coordinator: portal settings

Serves S09.1 to S09.3 · FR-ADM-003 · Swimlane 09 · Wireframe on page **56**

THE WIREFRAME'S NOTE With these, a grade line can show that it passes, and a term's average whether it meets the threshold. SEIskolar never declares a scholar's standing (FR-ADM-003).

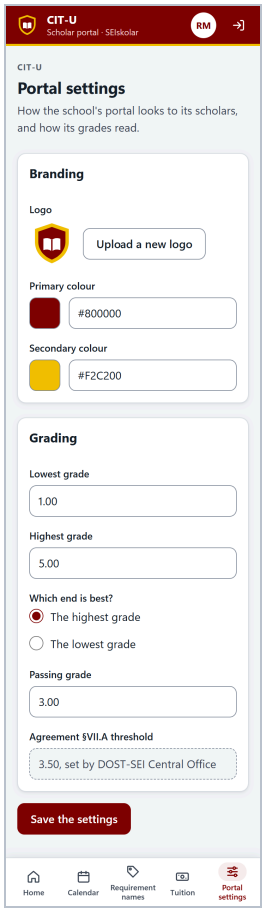

Phone · 360 px

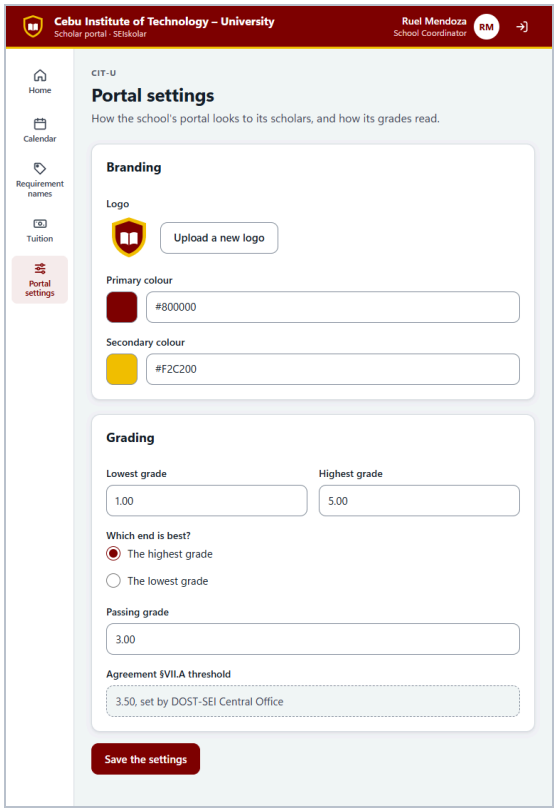

Tablet · 768 px

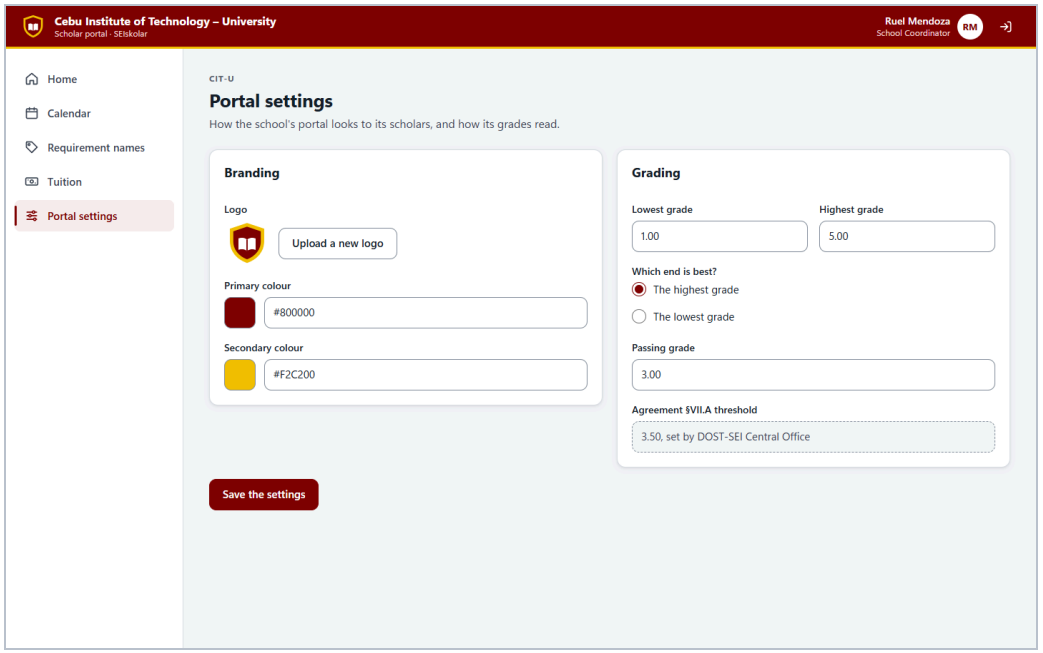

Desktop · 1440 px

Repository: `04-high-fidelity/coordinator-portal-settings.html` · Figma: page 04 High-fidelity, section coordinator-portal-settings.html, frames `coordinator-portal-settings.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 12 OF 29

Regional Office: home

Owner: Zedric Camilotes (@zedric-git)

Serves S04.1 · FR-MON-001 · Swimlane 04 · Wireframe on page **57**

THE WIREFRAME'S NOTE Counts only, for DOST-VII's schools (FR-MON-001). Each school keeps its own calendar, so each row is that school's current term (S02.1). A school past its deadline stays on the list.

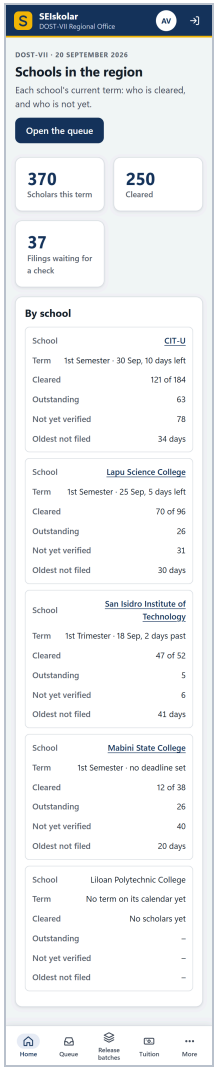

Phone · 360 px

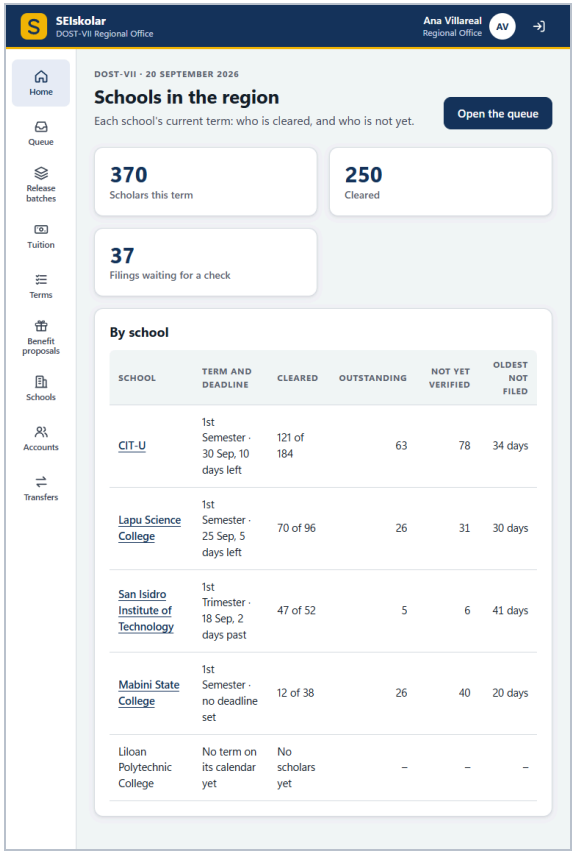

Tablet · 768 px

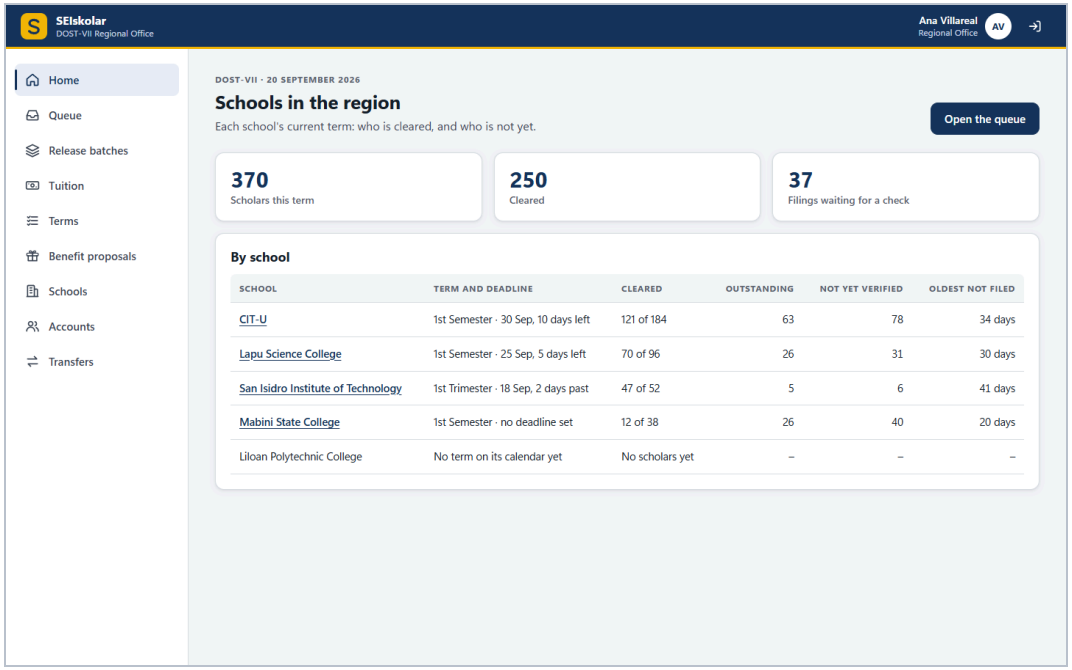

Desktop · 1440 px

Repository: `04-high-fidelity/regional-home.html` · Figma: page 04 High-fidelity, section regional-home.html, frames `regional-home.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 13 OF 29

Regional Office: checklist and deadline

Owner: Zedric Camilotes (@zedric-git)

Serves S02.5 to S02.7 · SRS §1.3; FR-SCH-001 · Swimlane 02 · Wireframe on page **58**

THE WIREFRAME'S NOTE The checklist is chosen from DOST's requirements, and each shows in the school's own words (S02.3). Without a deadline, scholars see the checklist with no countdown (S02.11).

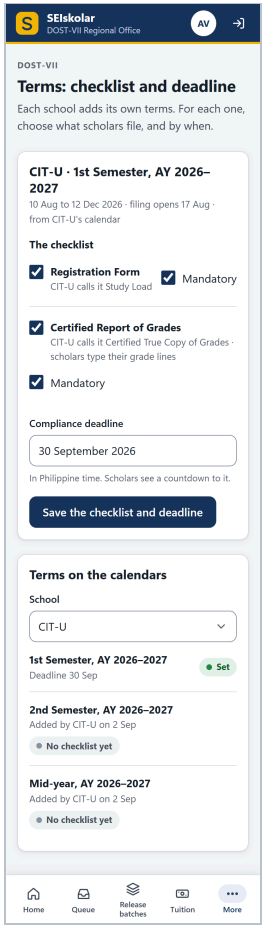

Phone · 360 px

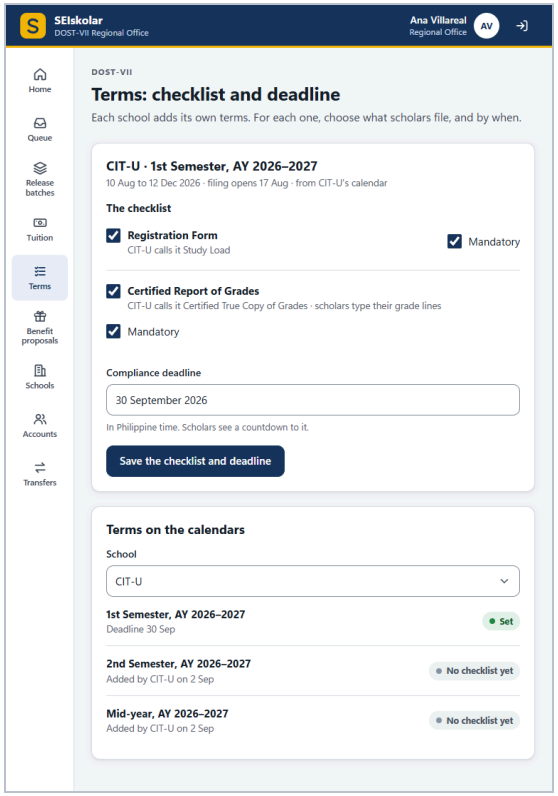

Tablet · 768 px

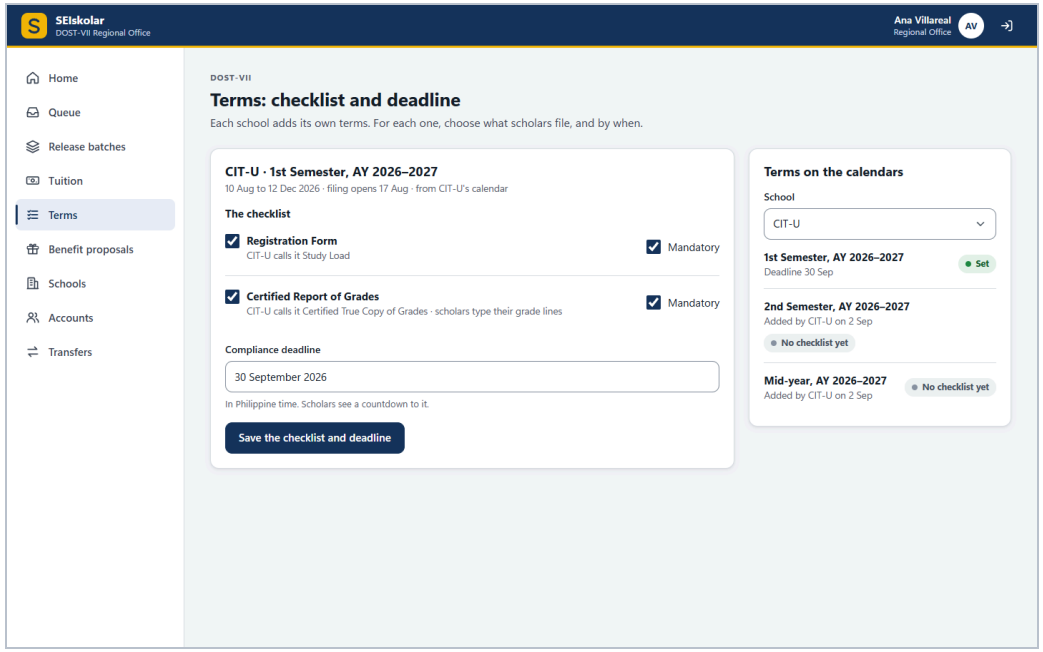

Desktop · 1440 px

Repository: `04-high-fidelity/regional-term-setup.html` · Figma: page 04 High-fidelity, section regional-term-setup.html, frames `regional-term-setup.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 14 OF 29

Regional Office: queue

Owner: Zedric Camilotes (@zedric-git)

Serves S04.2, S04.3 · FR-CHK-001, FR-CHK-002 · Swimlane 04 · Wireframe on page **59**

THE WIREFRAME'S NOTE A filing past its school's deadline stays in the queue, with how many days past: checking never waits for the deadline, and nothing is hidden after it (FR-CHK-001). Claiming a filing stops anyone else deciding it (FR-CHK-002).

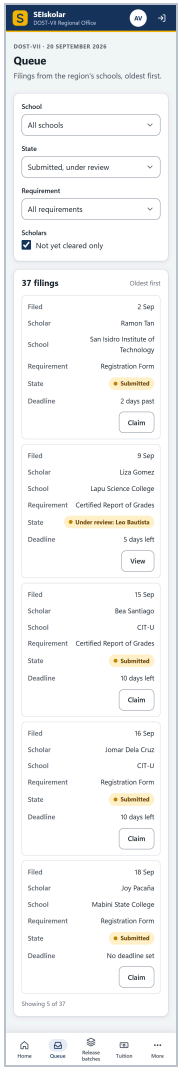

Phone · 360 px

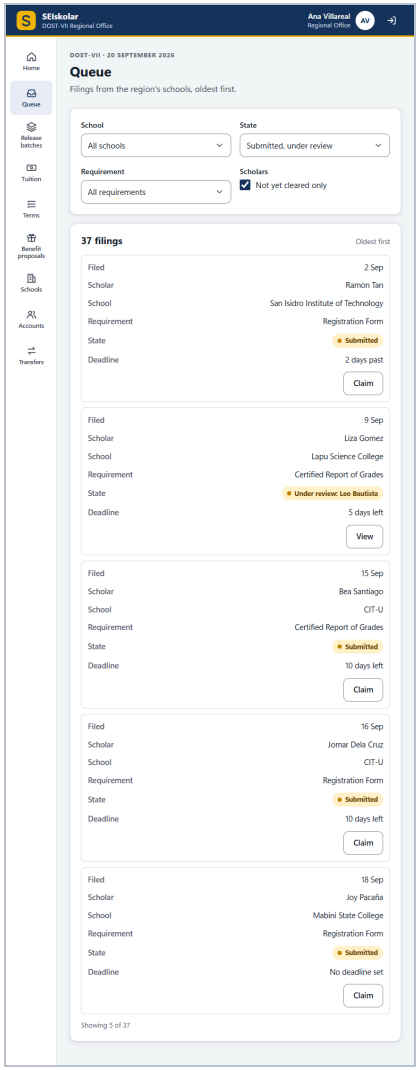

Tablet · 768 px

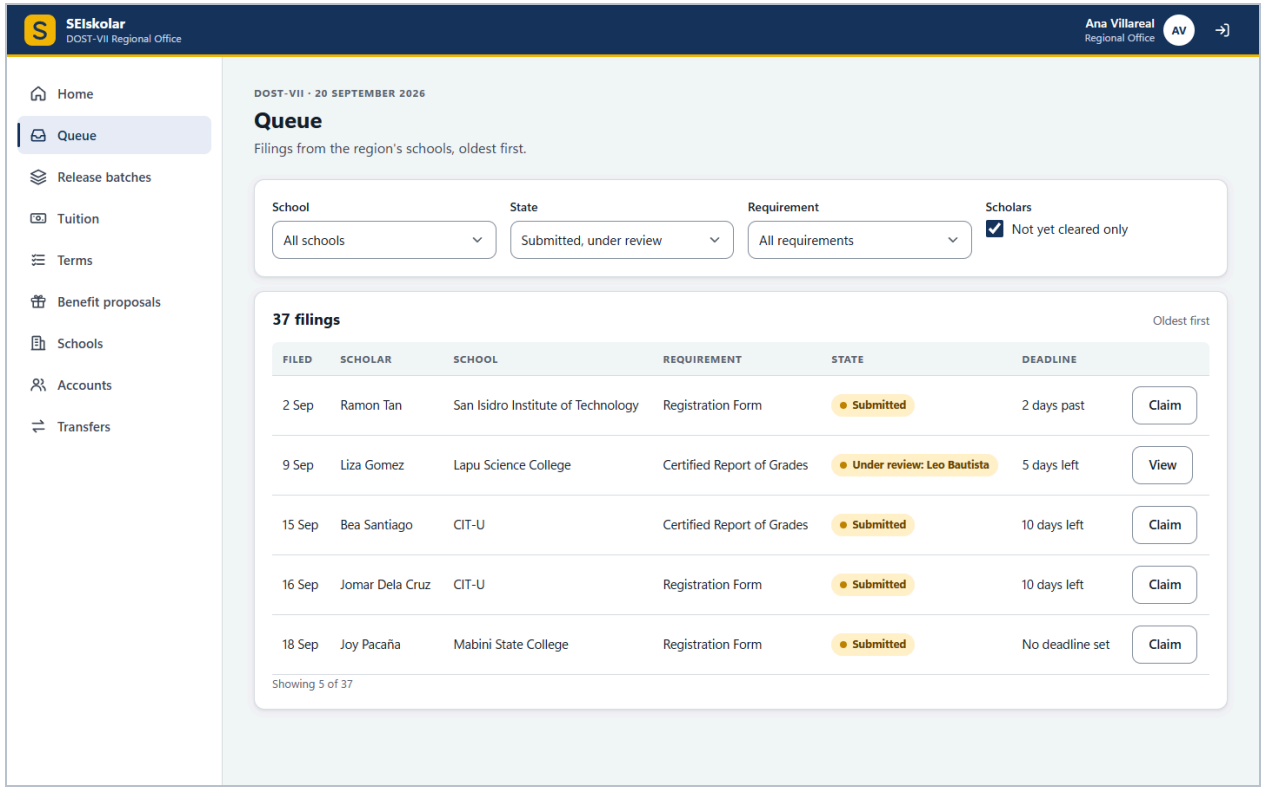

Desktop · 1440 px

Repository: `04-high-fidelity/regional-queue.html` · Figma: page 04 High-fidelity, section regional-queue.html, frames `regional-queue.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 15 OF 29

Regional Office: check a filing

Unclaimed · state 1 of 3

Owner: Zedric Camilotes (@zedric-git)

Serves S04.3 to S04.9 · FR-CHK-002, FR-CHK-003, FR-CHK-004 · Swimlane 04 · Wireframe on page **60**

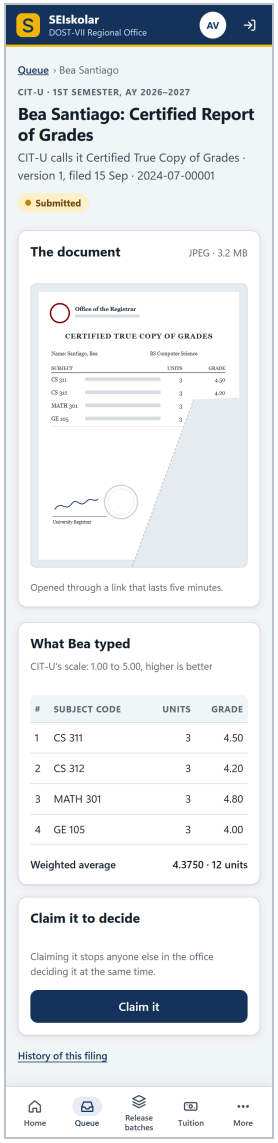

Phone · 360 px

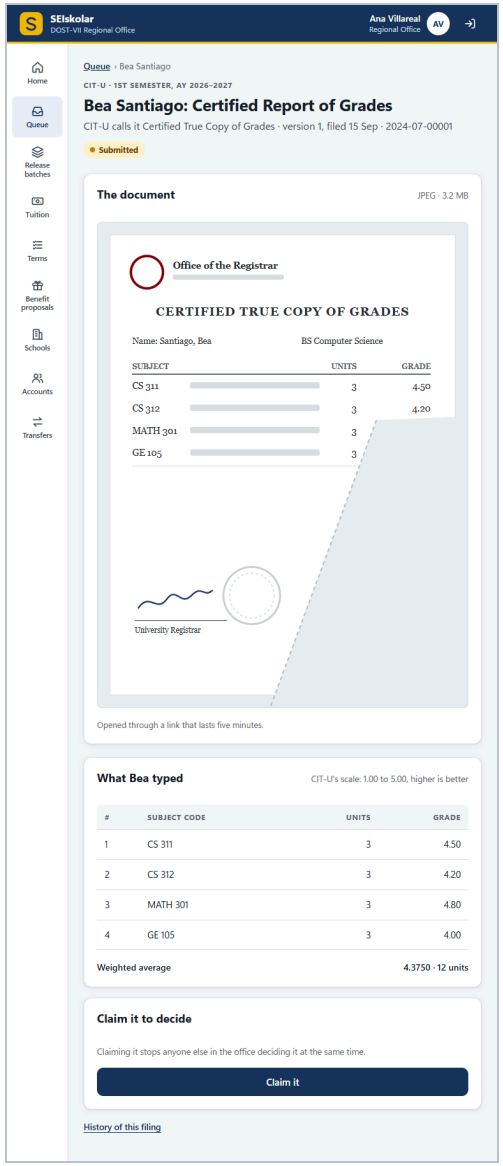

Tablet · 768 px

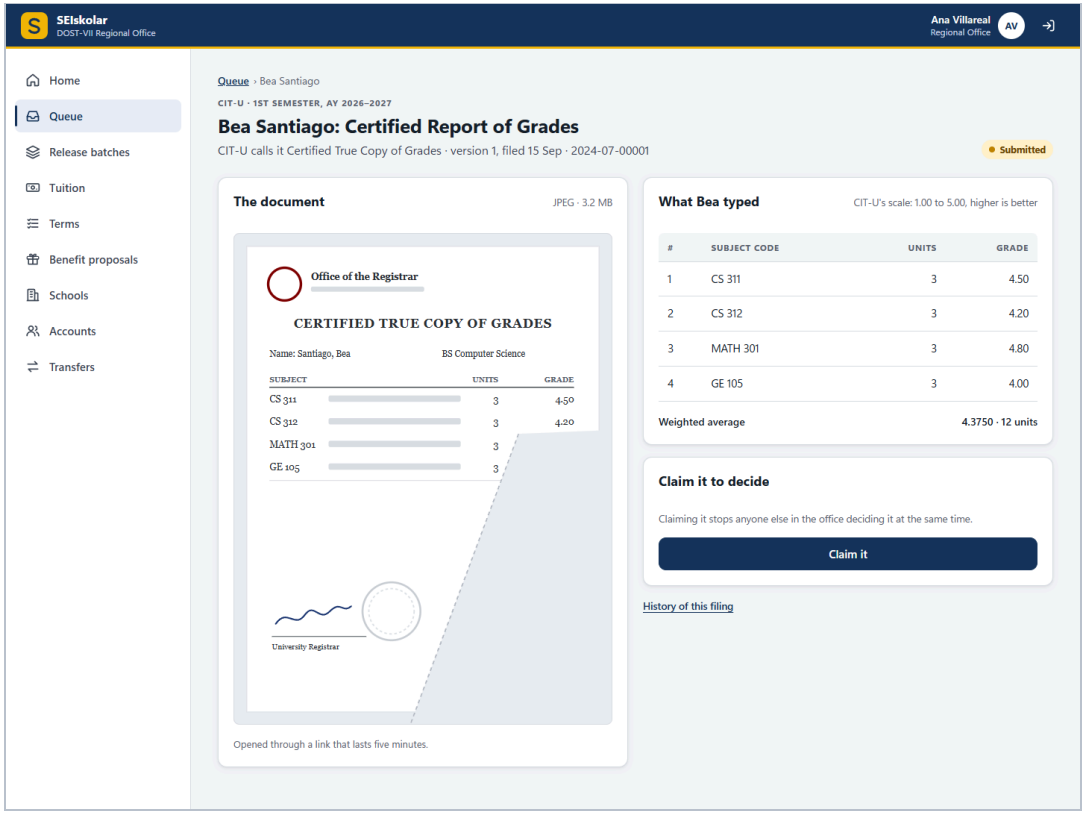

Desktop · 1440 px

Repository: `04-high-fidelity/regional-review.html?state=unclaimed` · Figma: page 04 High-fidelity, section regional-review.html, frames `regional-review--unclaimed.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 15 OF 29

Regional Office: check a filing

Claimed · state 2 of 3

Owner: Zedric Camilotes (@zedric-git)

Serves S04.3 to S04.9 · FR-CHK-002, FR-CHK-003, FR-CHK-004 · Swimlane 04 · Wireframe on page **61**

THE WIREFRAME'S NOTE Verified is final: no one can change it afterwards (S04.7). Releasing the claim puts the filing back in the queue for anyone (S04.6).

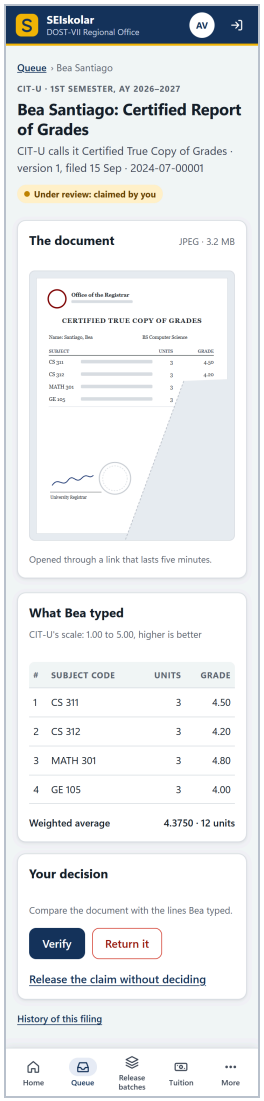

Phone · 360 px

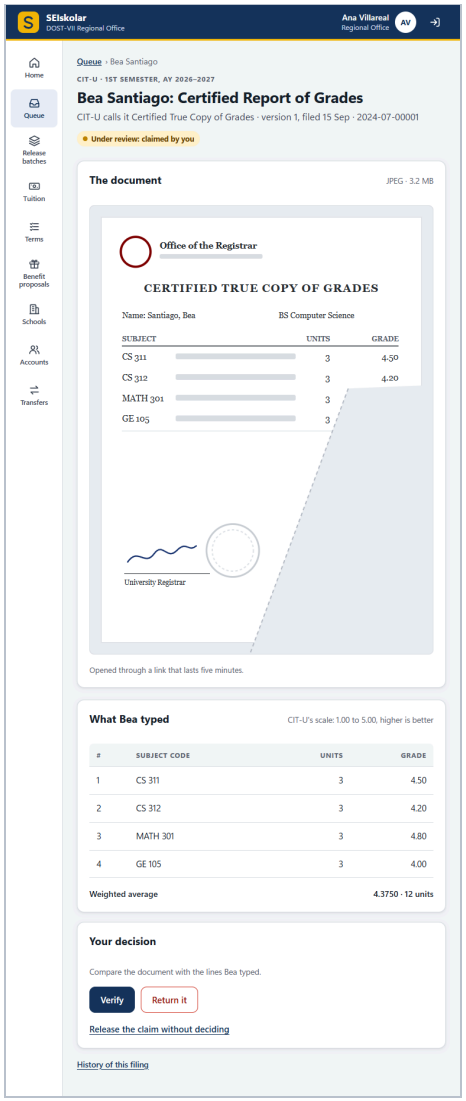

Tablet · 768 px

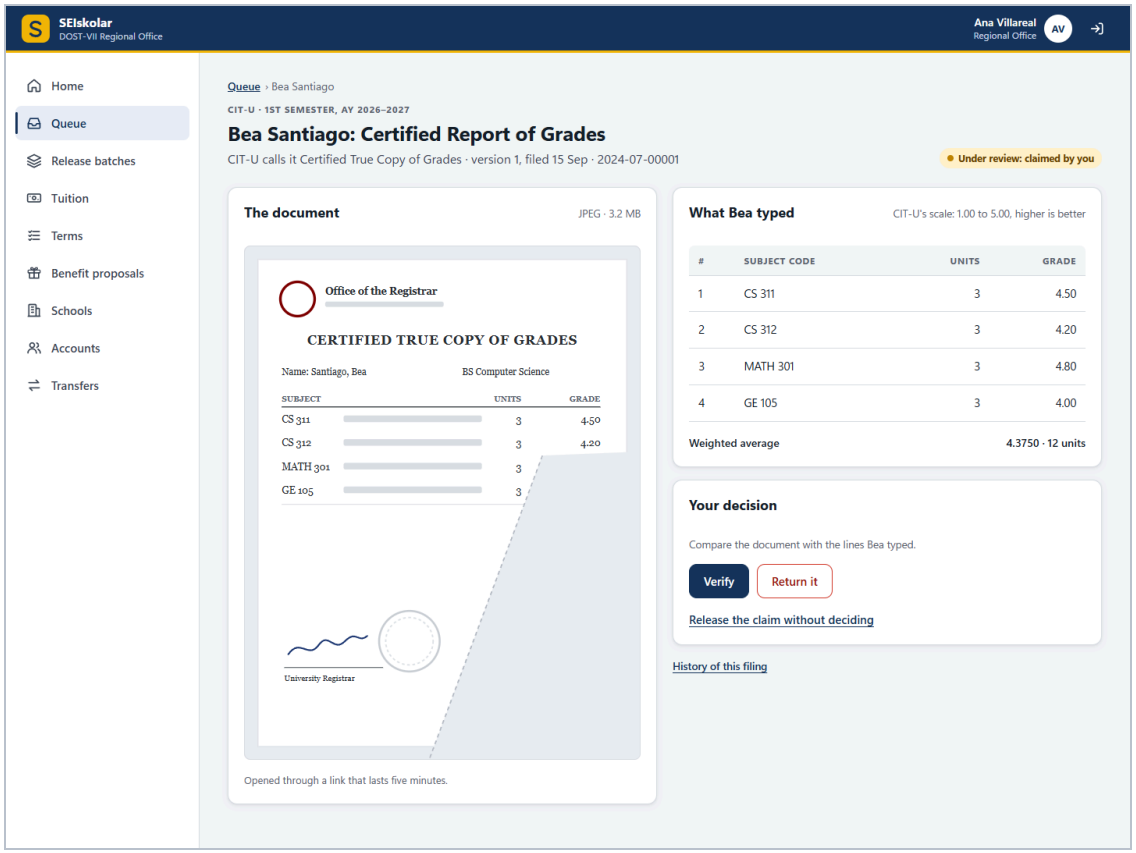

Desktop · 1440 px

Repository: `04-high-fidelity/regional-review.html?state=claimed` · Figma: page 04 High-fidelity, section regional-review.html, frames `regional-review--claimed.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 15 OF 29

Regional Office: check a filing

Returning · state 3 of 3

Owner: Zedric Camilotes (@zedric-git)

Serves S04.3 to S04.9 · FR-CHK-002, FR-CHK-003, FR-CHK-004 · Swimlane 04 · Wireframe on page **62**

THE WIREFRAME'S NOTE One of the eight reasons in FR-CHK-004. Bea sees the reason and the remarks, and files a corrected copy as version 2; version 1 stays on record (S04.11).

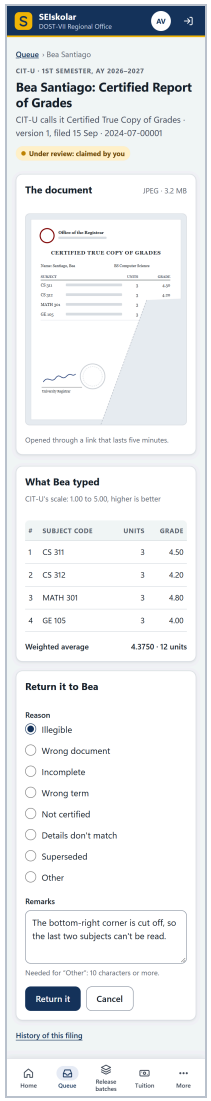

Phone · 360 px

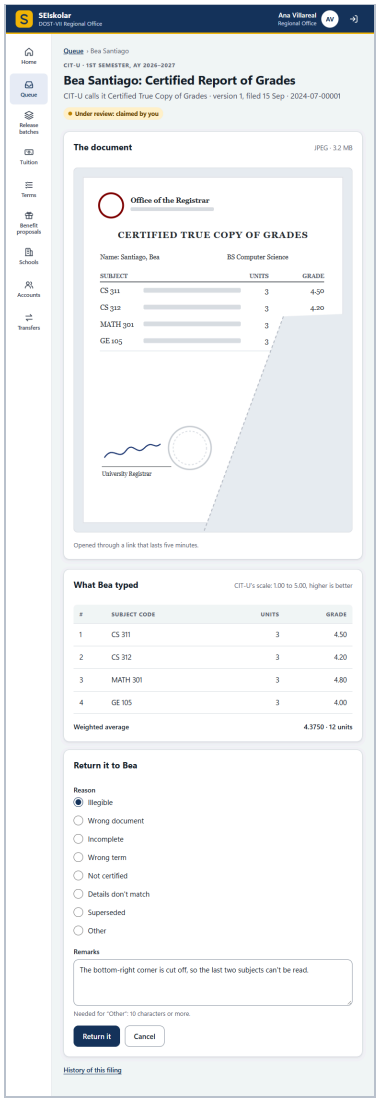

Tablet · 768 px

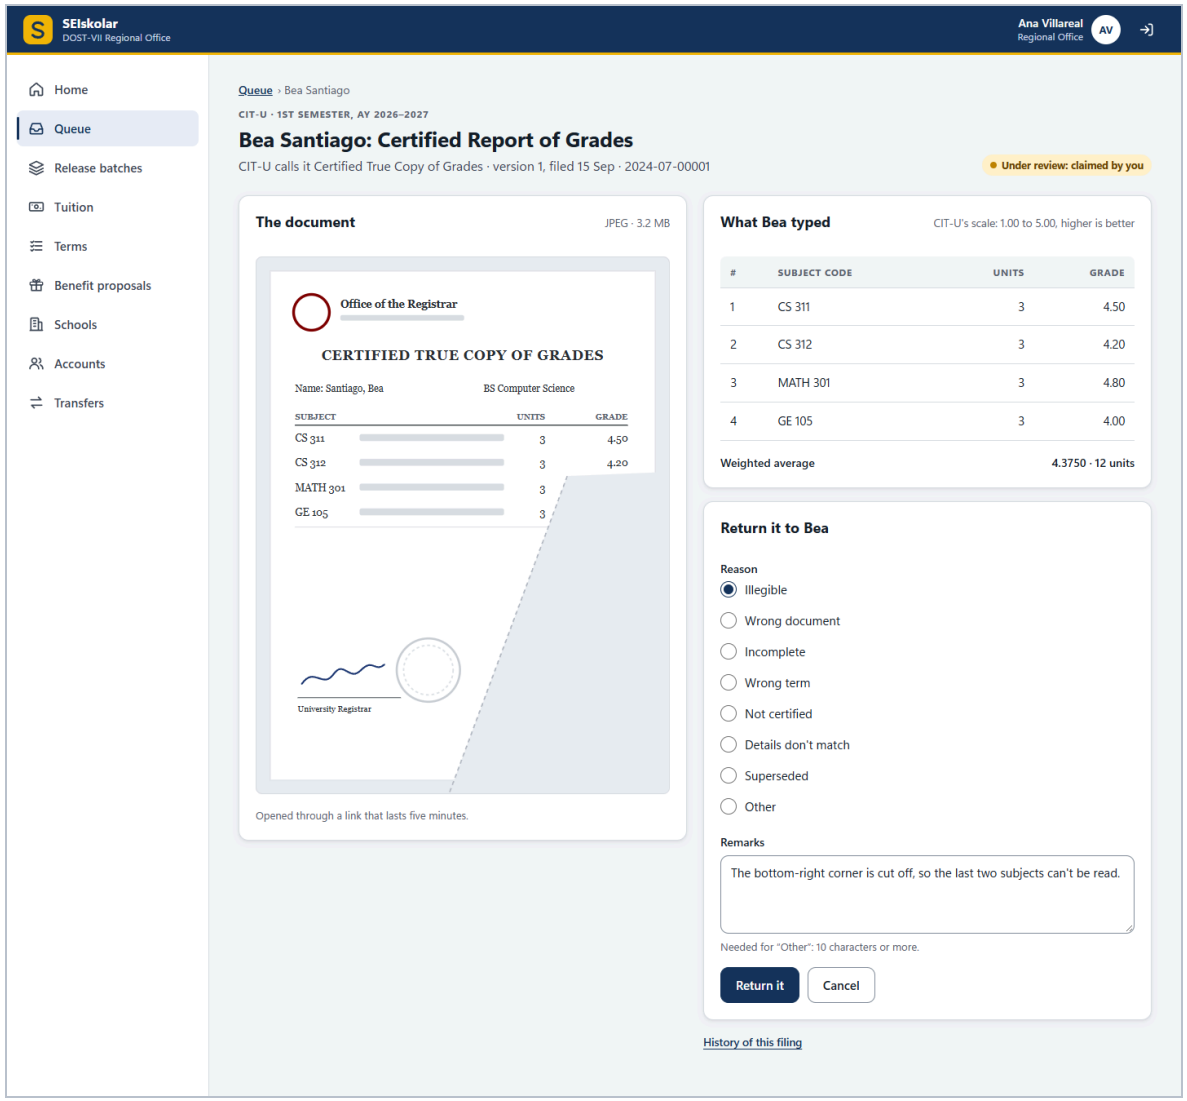

Desktop · 1440 px

Repository: `04-high-fidelity/regional-review.html?state=returning` · Figma: page 04 High-fidelity, section regional-review.html, frames `regional-review--returning.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 16 OF 29

Regional Office: release batches

Draft · state 1 of 2

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Serves S05.1 to S05.5, S05.8, S05.13 · FR-REL-001 · Swimlane 05 · Wireframe on page **63**

THE WIREFRAME'S NOTE SEIskolar offers only cleared scholars and works out no amount: each one is typed here, and nothing is added up (FR-REL-001). A scholar taken off moves to a later batch, with the reason, and loses nothing (S05.13).

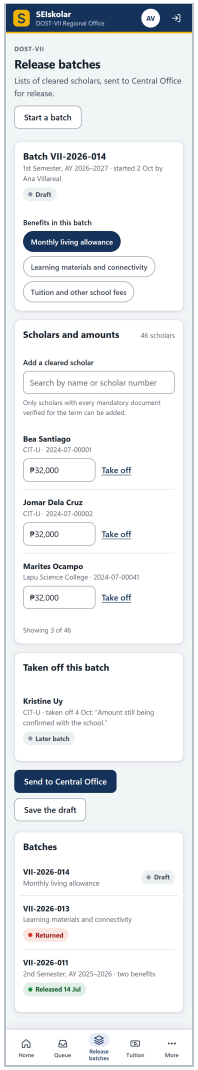

Phone · 360 px

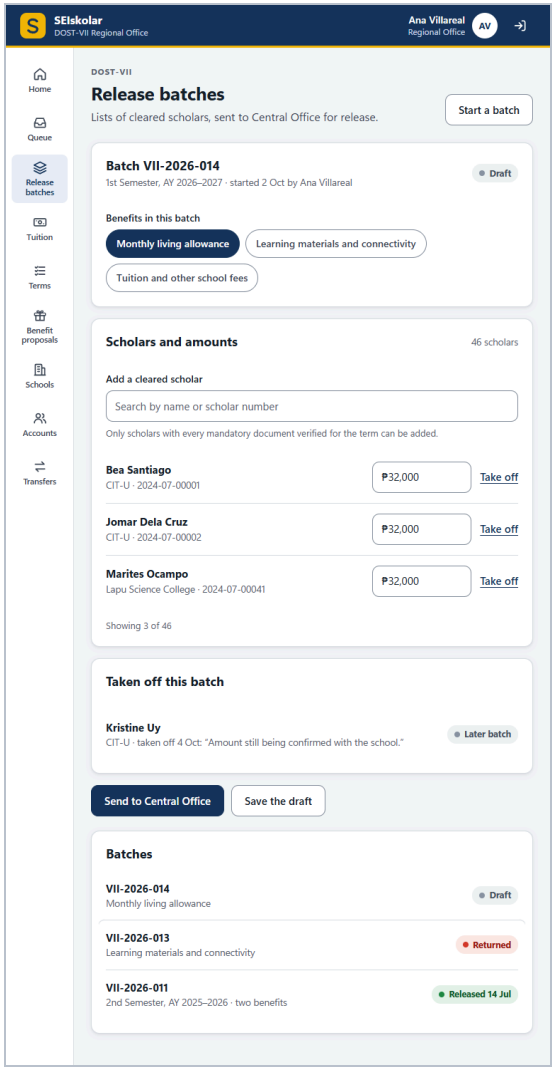

Tablet · 768 px

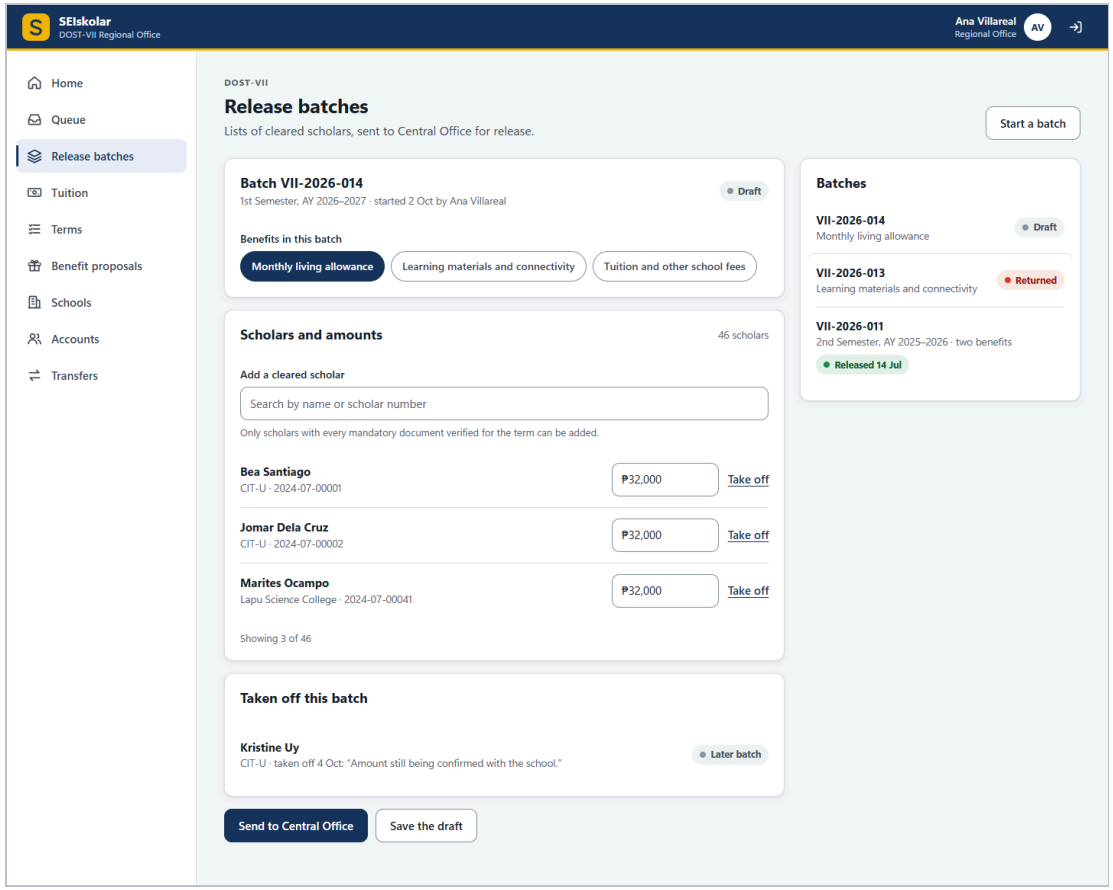

Desktop · 1440 px

Repository: `04-high-fidelity/regional-release-batch.html?state=draft` · Figma: page 04 High-fidelity, section regional-release-batch.html, frames `regional-release-batch--draft.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 16 OF 29

Regional Office: release batches

Returned · state 2 of 2

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Serves S05.1 to S05.5, S05.8, S05.13 · FR-REL-001 · Swimlane 05 · Wireframe on page **64**

THE WIREFRAME'S NOTE A returned batch is a draft again: correct it, and send it again (S05.8, FR-REL-001).

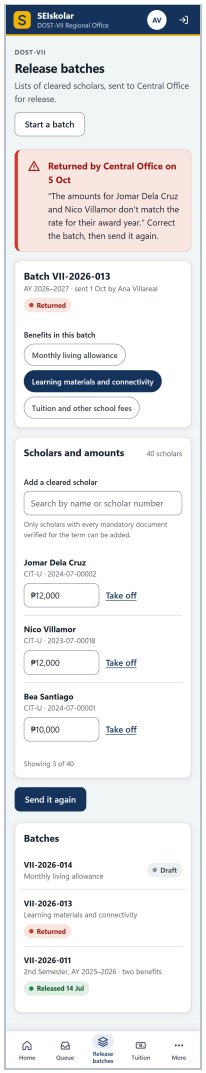

Phone · 360 px

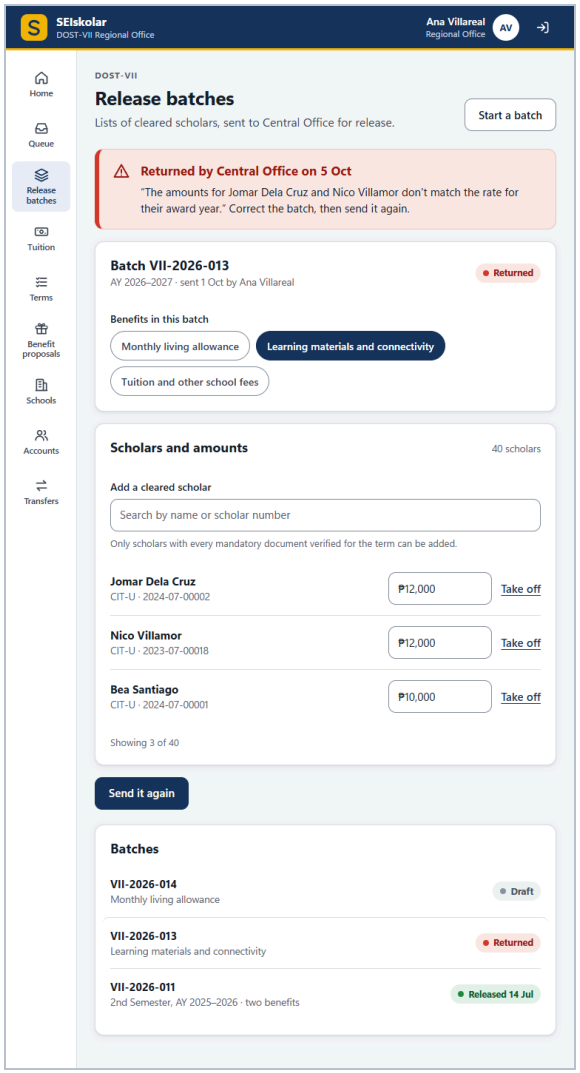

Tablet · 768 px

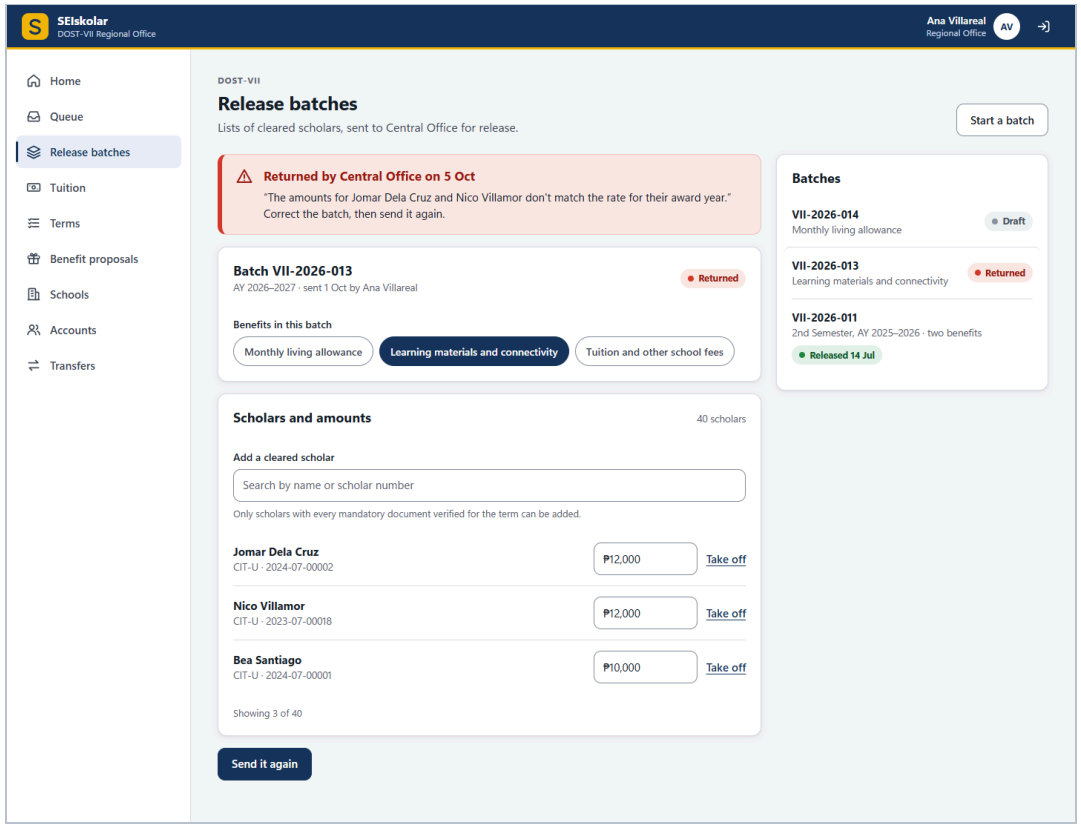

Desktop · 1440 px

Repository: `04-high-fidelity/regional-release-batch.html?state=returned` · Figma: page 04 High-fidelity, section regional-release-batch.html, frames `regional-release-batch--returned.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 17 OF 29

Regional Office: tuition remittances

Record · state 1 of 2

Owner: Althea Maeve Kinaadman (@Tiamporado)

Serves S06.1, S06.2, S06.5, S06.13 · FR-TUI-001 · Swimlane 06 · Wireframe on page **65**

THE WIREFRAME'S NOTE The proof goes to private storage (S06.2). CIT-U's coordinator checks the remittance against the school's own records, then credits each scholar (swimlane 06).

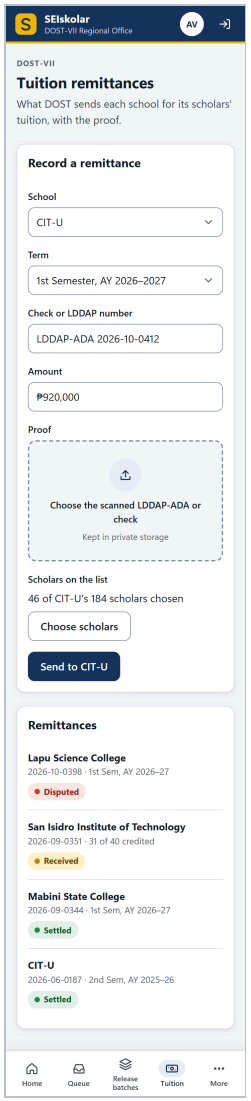

Phone · 360 px

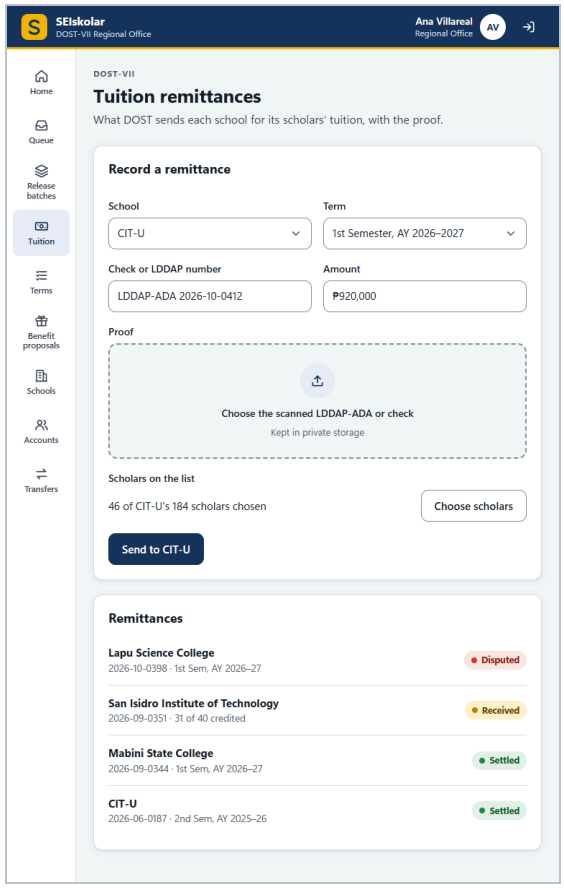

Tablet · 768 px

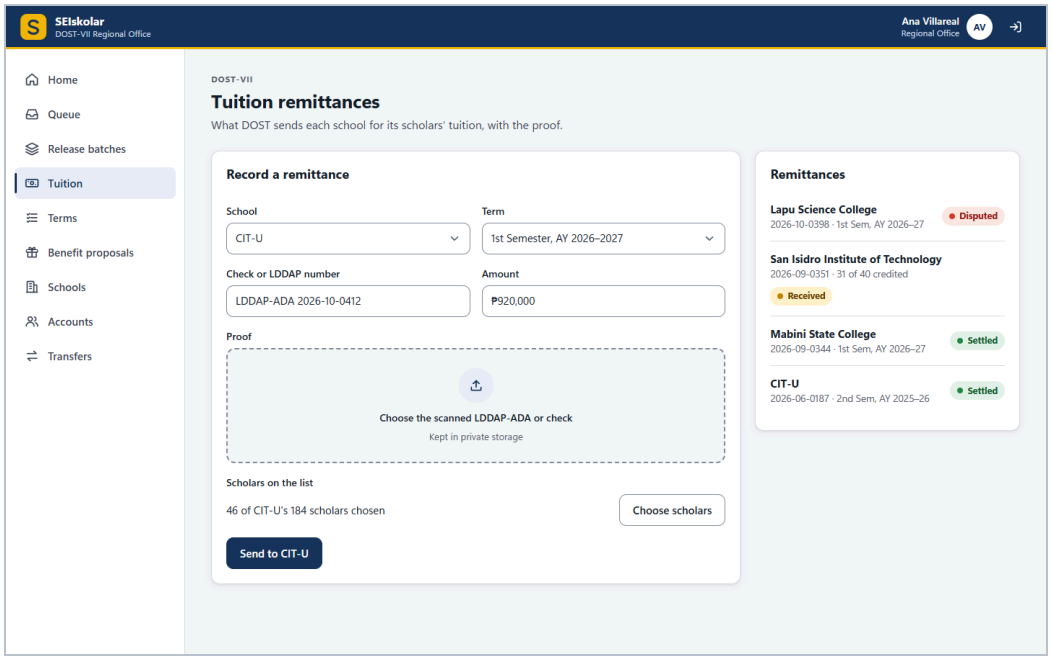

Desktop · 1440 px

Repository: `04-high-fidelity/regional-remittance.html?state=record` · Figma: page 04 High-fidelity, section regional-remittance.html, frames `regional-remittance--record.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 17 OF 29

Regional Office: tuition remittances

Disputed · state 2 of 2

Owner: Althea Maeve Kinaadman (@Tiamporado)

Serves S06.1, S06.2, S06.5, S06.13 · FR-TUI-001 · Swimlane 06 · Wireframe on page **66**

THE WIREFRAME'S NOTE A school disputes with a reason, before or during crediting (S06.5, S06.13). The corrected remittance goes back to the school as sent (FR-TUI-001).

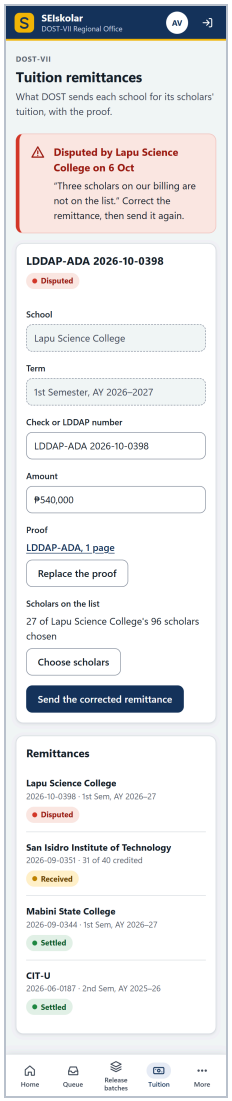

Phone · 360 px

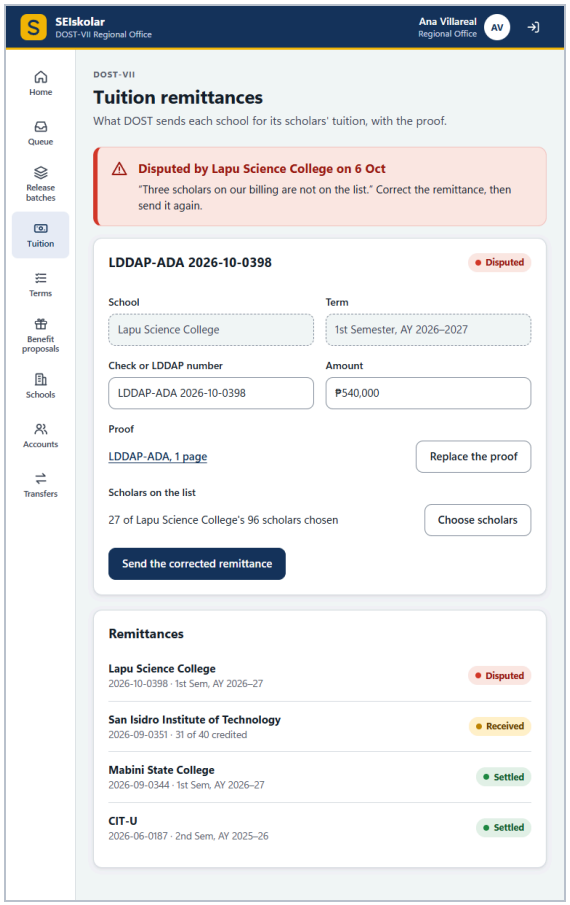

Tablet · 768 px

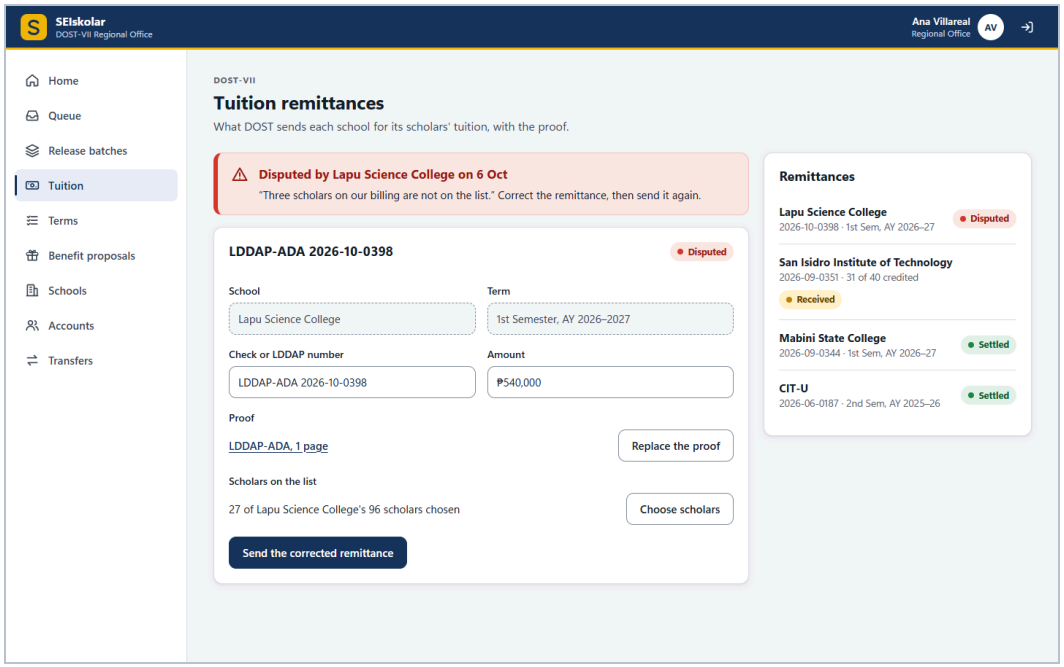

Desktop · 1440 px

Repository: `04-high-fidelity/regional-remittance.html?state=disputed` · Figma: page 04 High-fidelity, section regional-remittance.html, frames `regional-remittance--disputed.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 18 OF 29

Regional Office: benefit proposals

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Serves S07.1, S07.2, S07.5 · FR-BEN-002 · Swimlane 07 · Wireframe on page **67**

THE WIREFRAME'S NOTE A proposal changes nothing until Central Office approves it (FR-BEN-002). A rejected one shows Central Office's reason (S07.5).

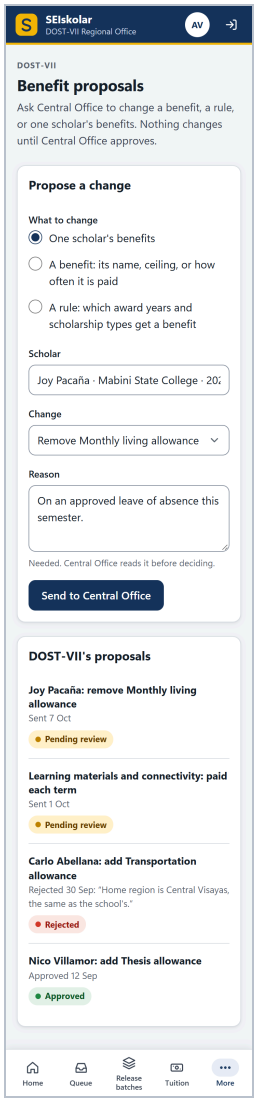

Phone · 360 px

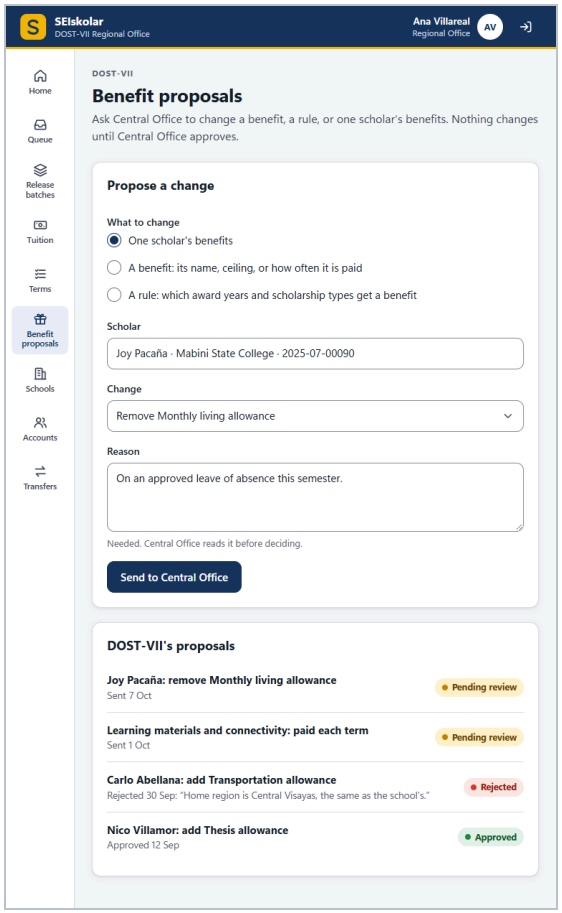

Tablet · 768 px

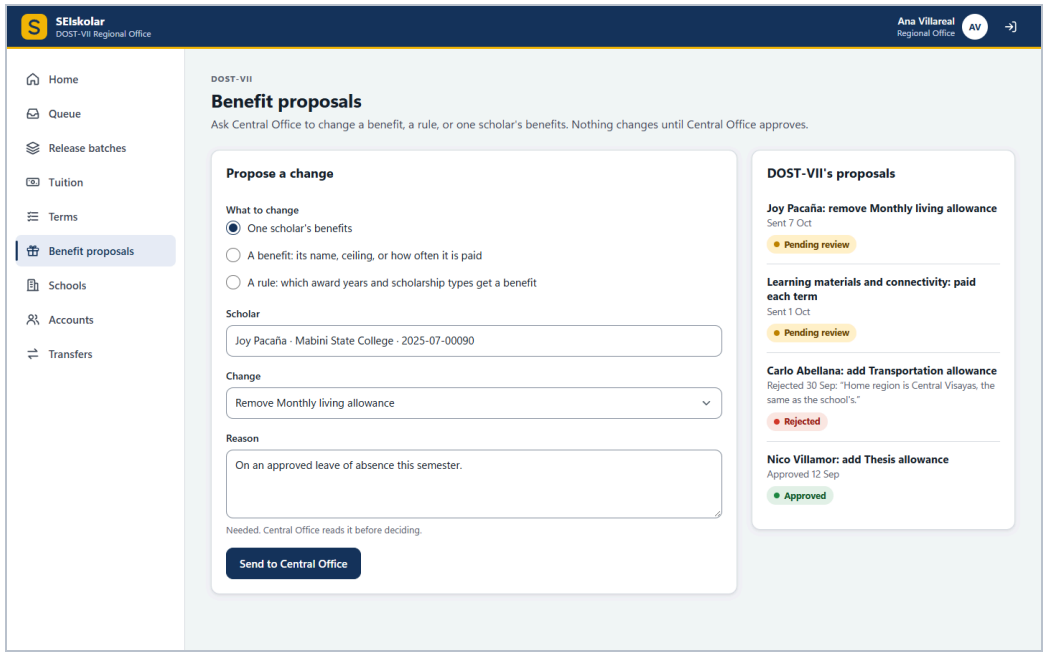

Desktop · 1440 px

Repository: `04-high-fidelity/regional-benefit-proposal.html` · Figma: page 04 High-fidelity, section regional-benefit-proposal.html, frames `regional-benefit-proposal.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 19 OF 29

Regional Office: schools

Owner: Dorothy Biatriz Capao (@dbeenutsz)

Serves S08.4 · FR-ADM-001 · Swimlane 08 · Wireframe on page **68**

THE WIREFRAME'S NOTE A Regional Office creates schools in its own region only (FR-ADM-001). The school's coordinator then sets up its calendar, requirement names and portal (swimlanes 02 and 09).

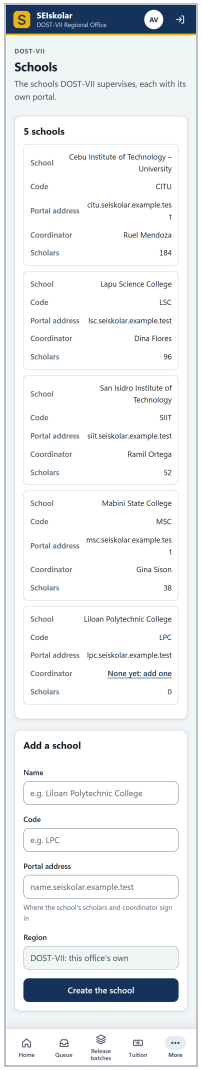

Phone · 360 px

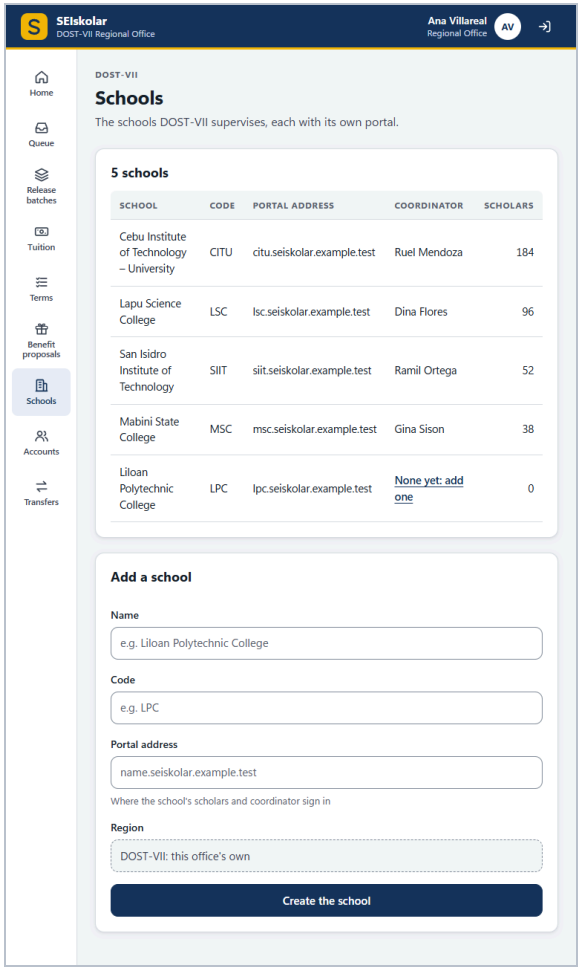

Tablet · 768 px

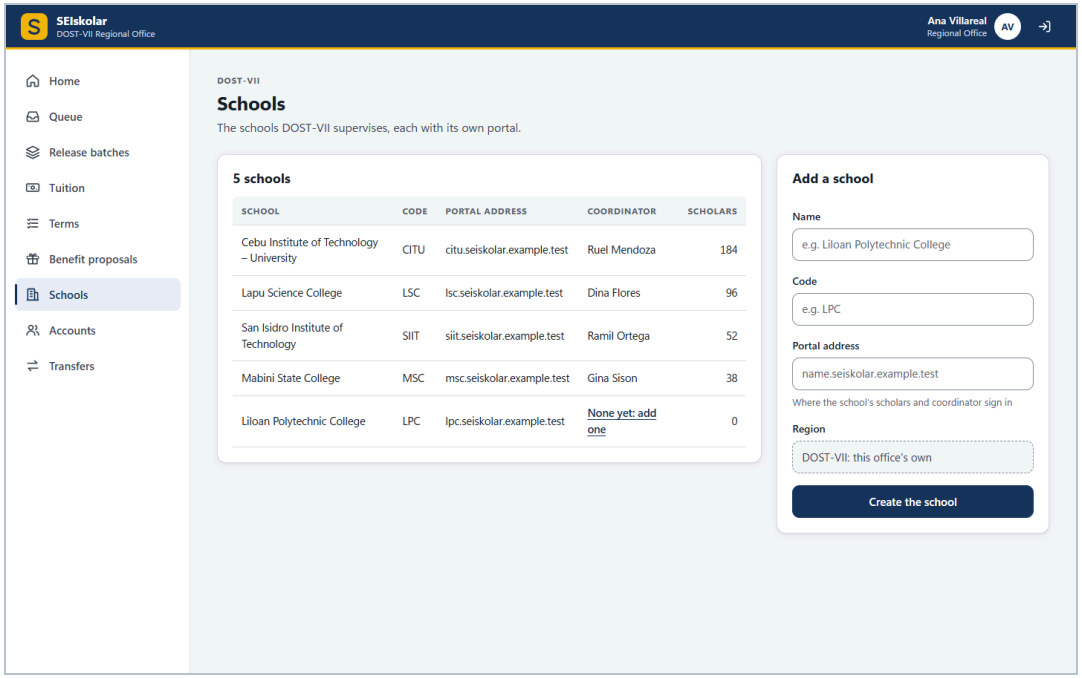

Desktop · 1440 px

Repository: `04-high-fidelity/regional-schools.html` · Figma: page 04 High-fidelity, section regional-schools.html, frames `regional-schools.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 20 OF 29

Regional Office: accounts

Scholars · state 1 of 2

Owner: Dorothy Biatriz Capao (@dbeenutsz)

Serves S08.5 to S08.7 · FR-ADM-001 · Swimlane 08 · Wireframe on page **69**

THE WIREFRAME'S NOTE A Regional Office creates accounts for its own region's schools only; DOST staff accounts are the system administrator's (FR-ADM-001). A new account signs in with its email (swimlane 01).

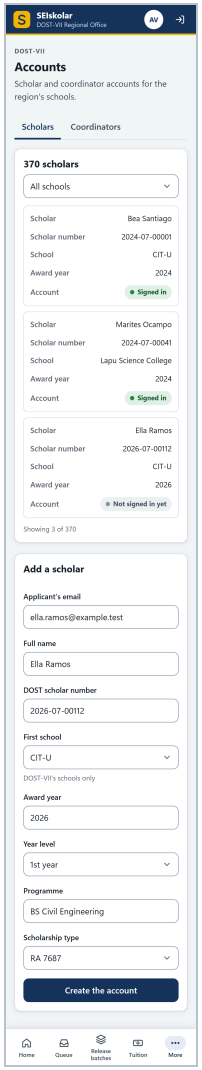

Phone · 360 px

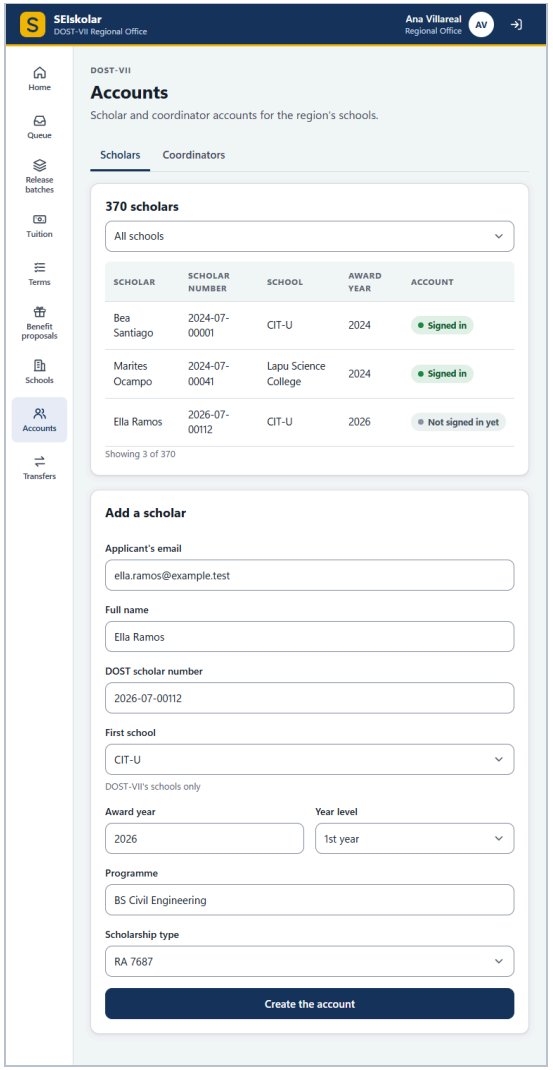

Tablet · 768 px

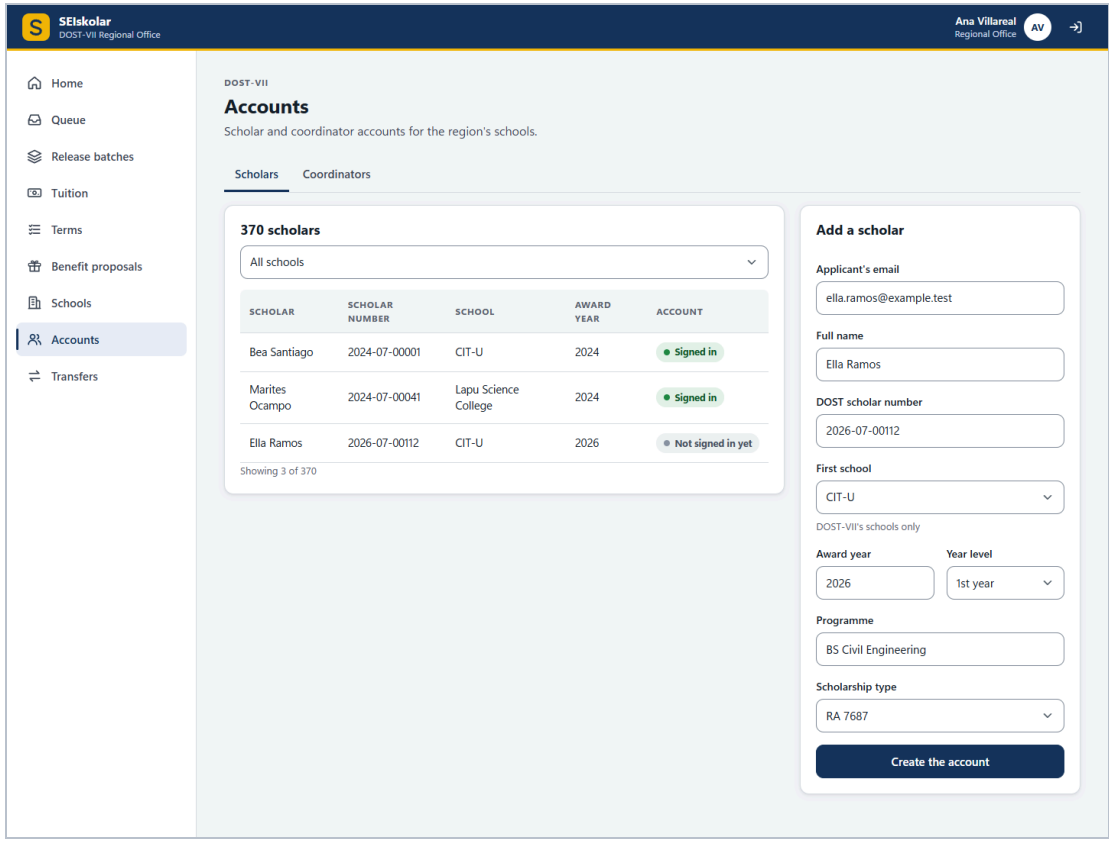

Desktop · 1440 px

Repository: `04-high-fidelity/regional-accounts.html?state=scholars` · Figma: page 04 High-fidelity, section regional-accounts.html, frames `regional-accounts--scholars.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 20 OF 29

Regional Office: accounts

Coordinators · state 2 of 2

Owner: Dorothy Biatriz Capao (@dbeenutsz)

Serves S08.5 to S08.7 · FR-ADM-001 · Swimlane 08 · Wireframe on page **70**

THE WIREFRAME'S NOTE A Regional Office creates accounts for its own region's schools only; DOST staff accounts are the system administrator's (FR-ADM-001). A new account signs in with its email (swimlane 01).

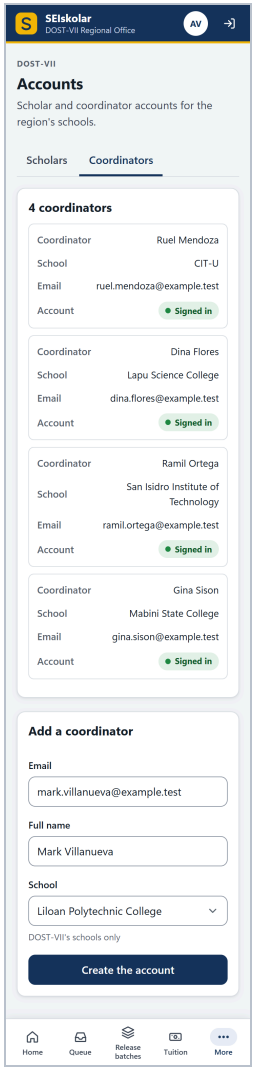

Phone · 360 px

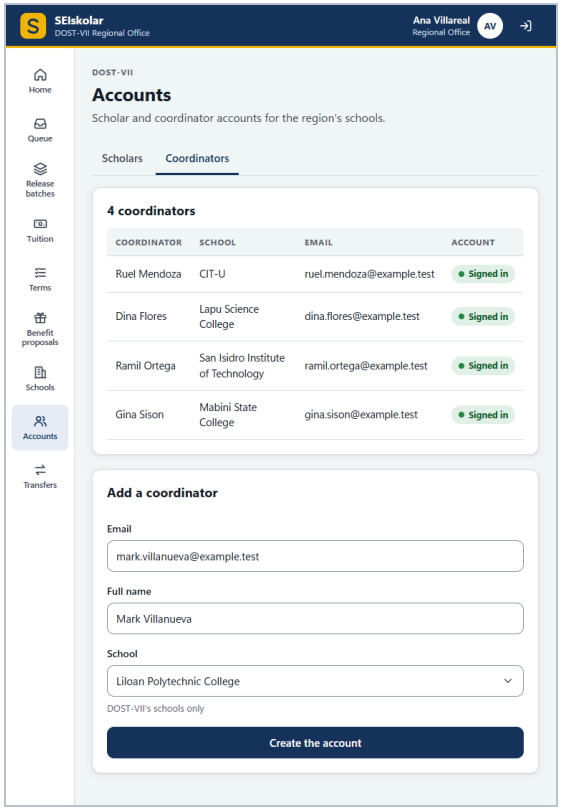

Tablet · 768 px

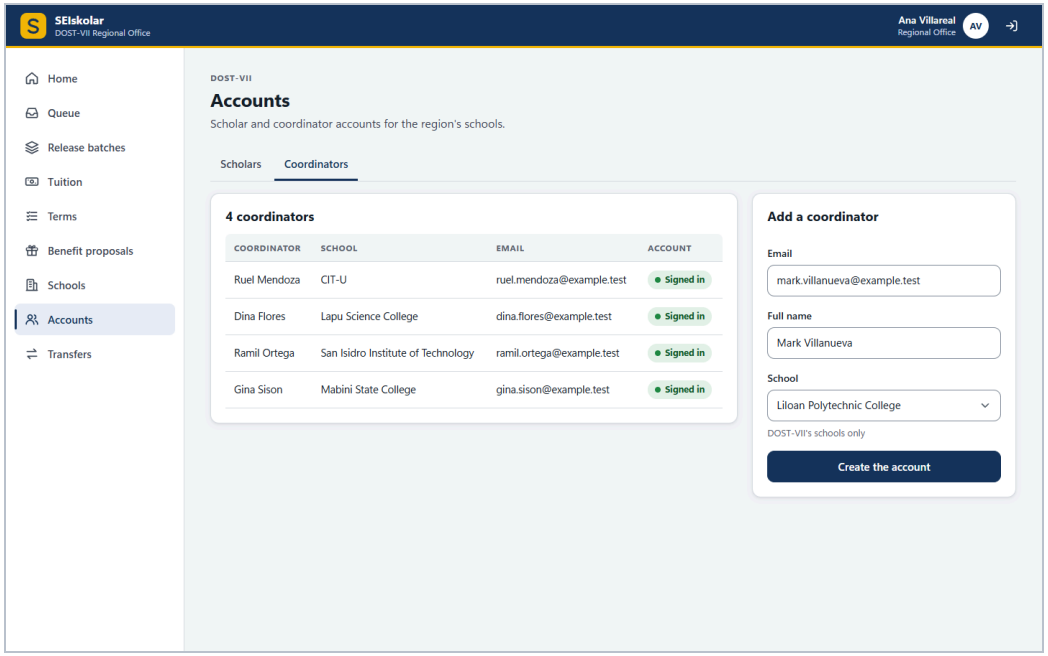

Desktop · 1440 px

Repository: `04-high-fidelity/regional-accounts.html?state=coordinators` · Figma: page 04 High-fidelity, section regional-accounts.html, frames `regional-accounts--coordinators.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 21 OF 29

Regional Office: transfers

Owner: Dorothy Biatriz Capao (@dbeenutsz)

Serves S08.9 to S08.11, S08.13 · FR-ADM-002 · Swimlane 08 · Wireframe on page **71**

THE WIREFRAME'S NOTES

- Aira's filings at Mabini State College keep that school; from the next term, Aira files at Lapu Science College (S08.11, S08.12).
- Assumed The SRS does not settle which Regional Office records a move to another region (open question 26, S08.13), so this screen offers DOST-VII's schools only.

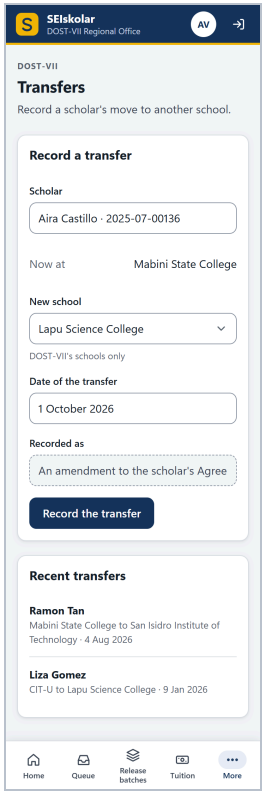

Phone · 360 px

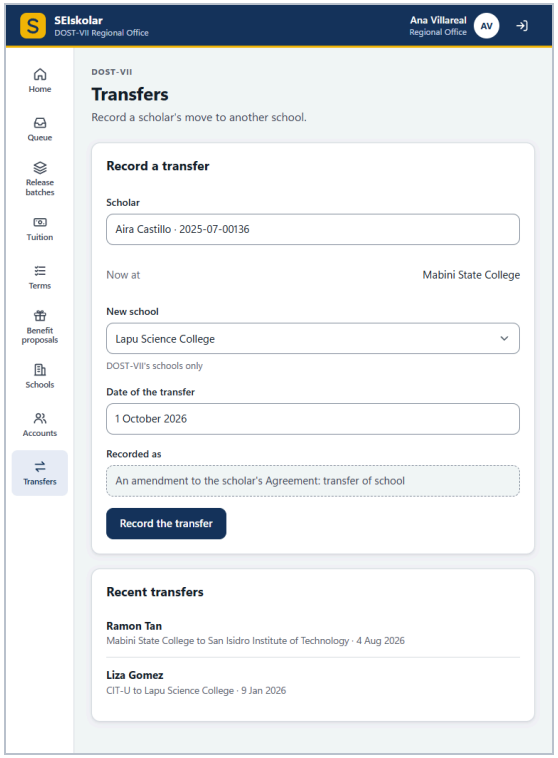

Tablet · 768 px

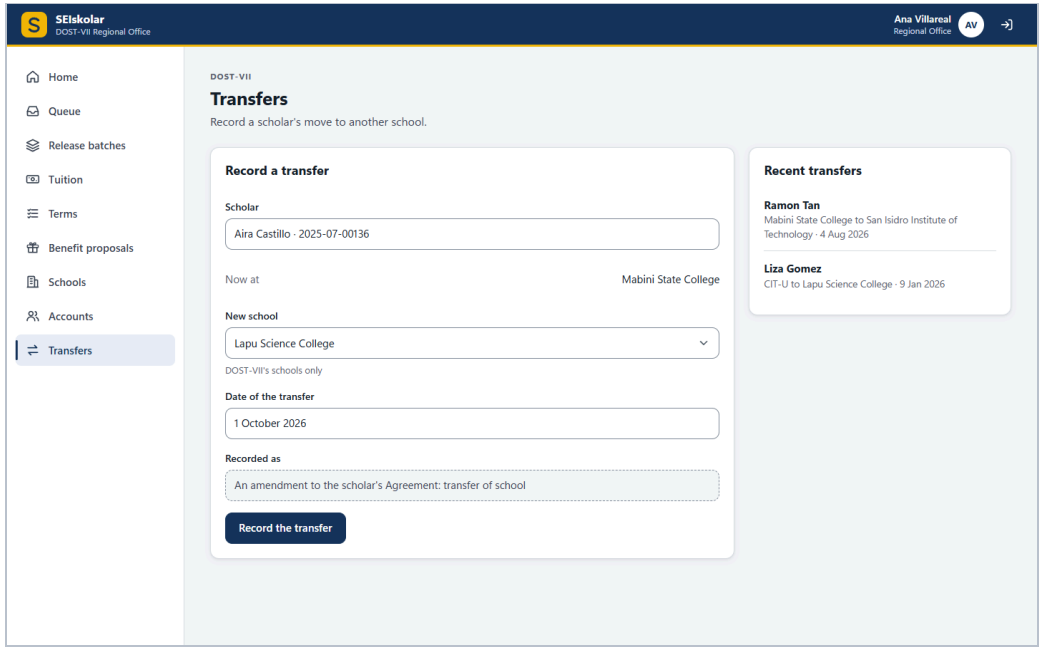

Desktop · 1440 px

Repository: `04-high-fidelity/regional-transfer.html` · Figma: page 04 High-fidelity, section regional-transfer.html, frames `regional-transfer.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 22 OF 29

A record's history

Owner: Zedric Camilotes (@zedric-git)

Serves S10.5 to S10.8 · NFR-SEC-003; SRS §4.1 "Inspect Immutable Audit Logs" · Swimlane 10 · Wireframe on page **72**

THE WIREFRAME'S NOTE No one can change or delete a line (S10.4). Its region comes from the record's school, never from whoever acted (S10.3). The Regional Office reads its own region's records and Central Office reads all; a scholar or coordinator who opens this address gets nothing back (S10.6, S10.8).

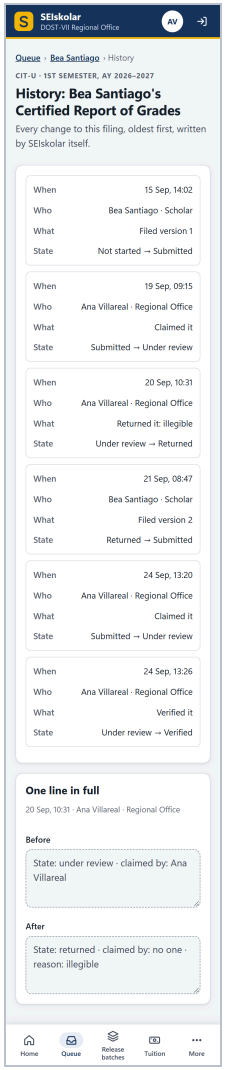

Phone · 360 px

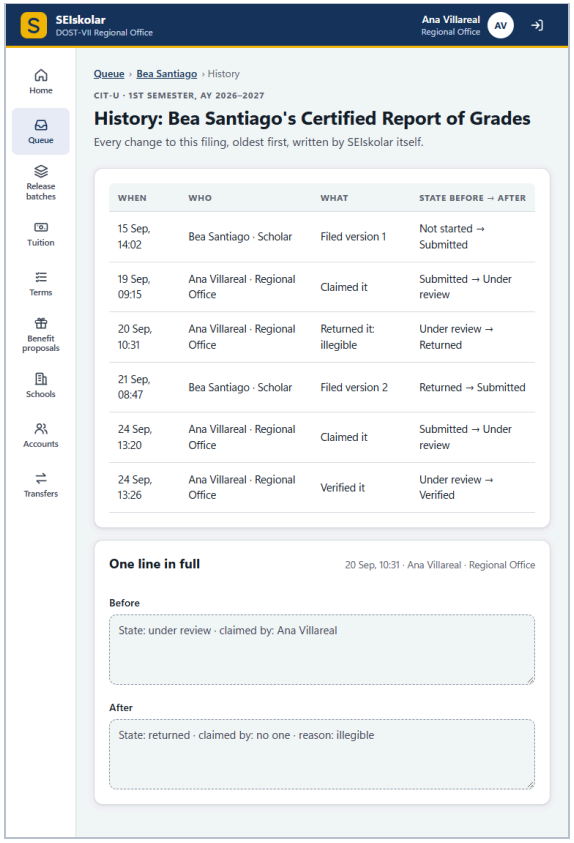

Tablet · 768 px

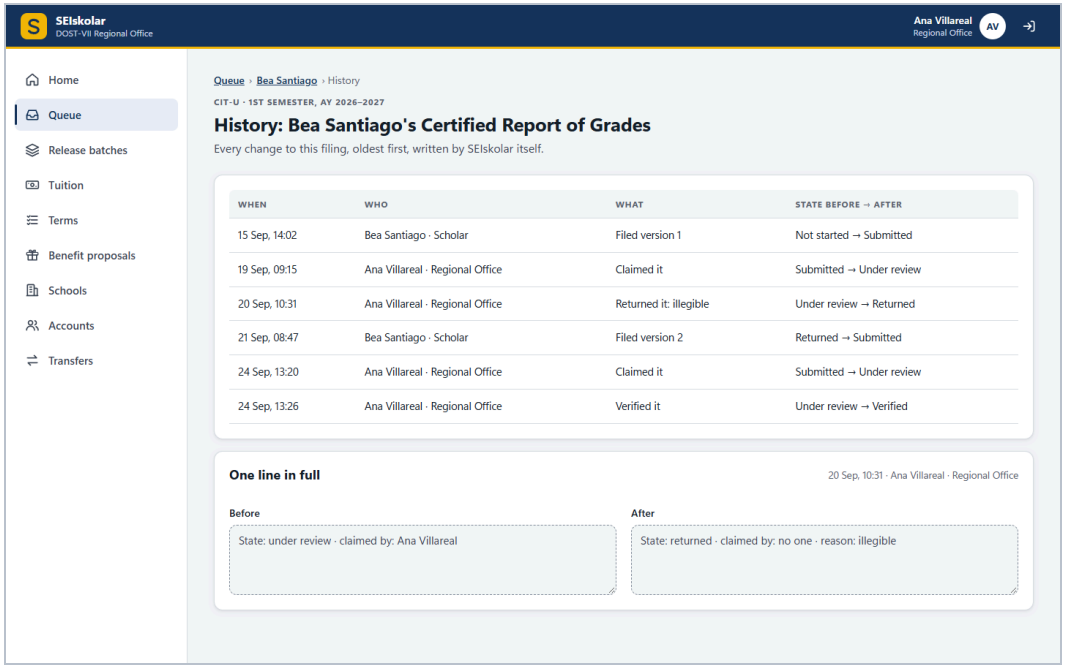

Desktop · 1440 px

Repository: `04-high-fidelity/record-history.html` · Figma: page 04 High-fidelity, section record-history.html, frames `record-history.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 23 OF 29

Central Office: release batches

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Serves S05.6 · FR-REL-002 · Swimlane 05 · Wireframe on page **73**

THE WIREFRAME'S NOTE Central Office reads every region's batches (SRS §1.3). Every decision on a batch records who made it and when (FR-REL-002).

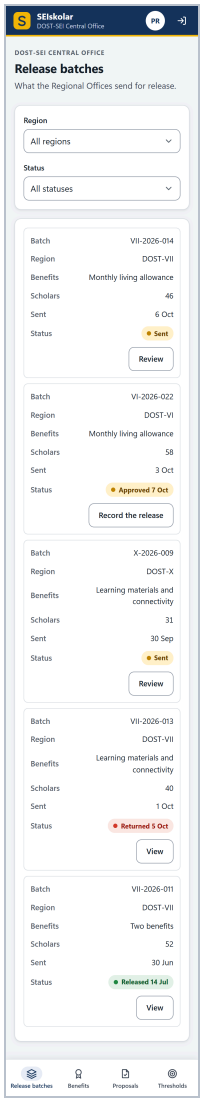

Phone · 360 px

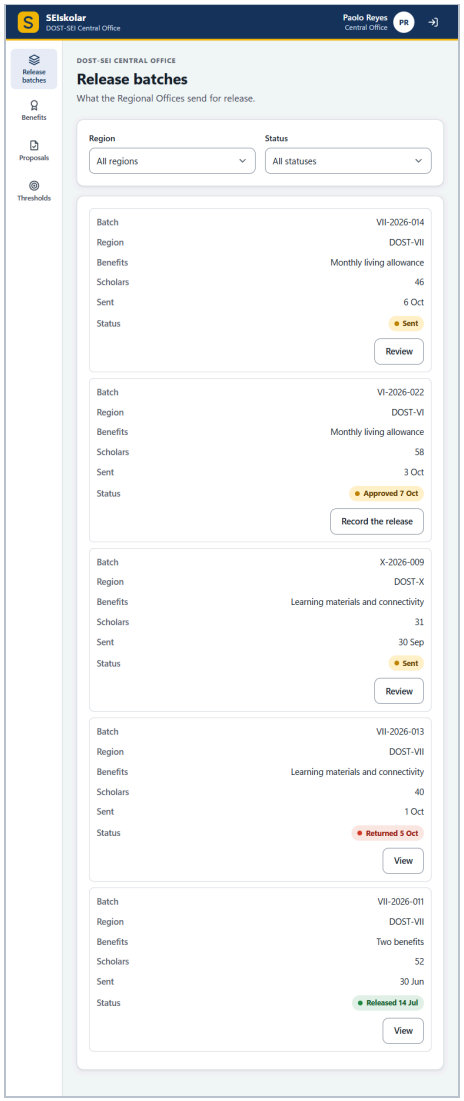

Tablet · 768 px

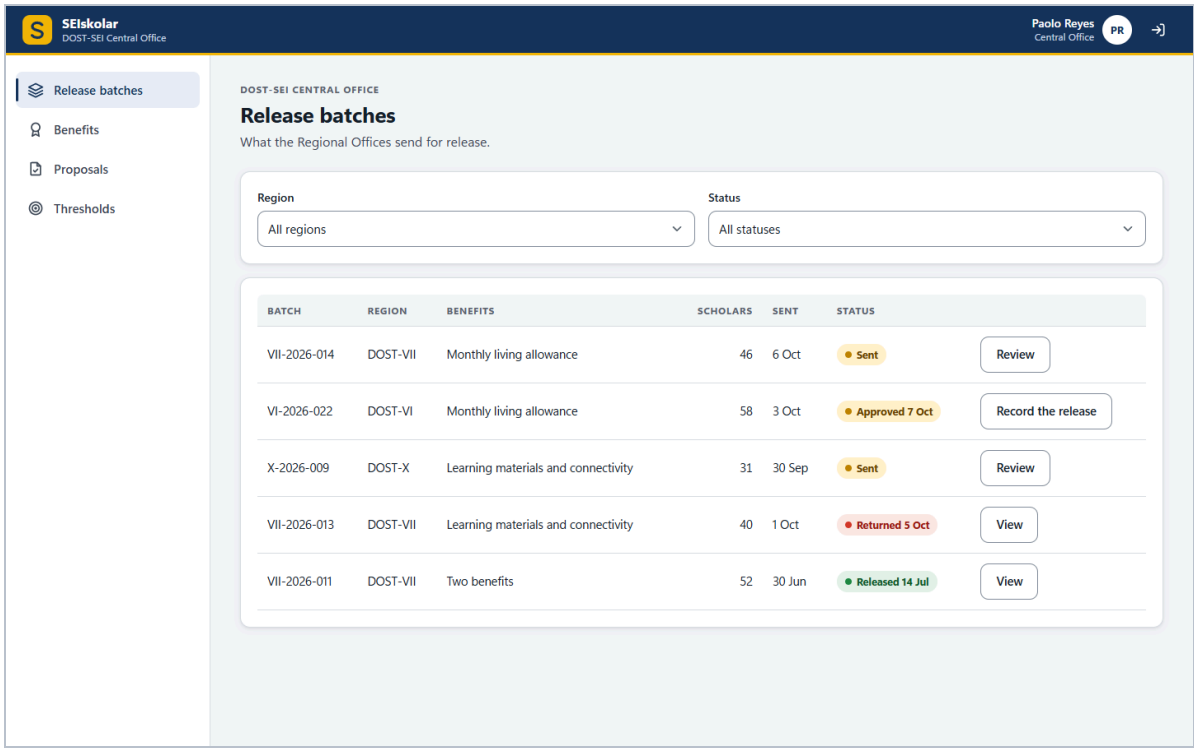

Desktop · 1440 px

Repository: `04-high-fidelity/central-batches.html` · Figma: page 04 High-fidelity, section central-batches.html, frames `central-batches.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 24 OF 29

Central Office: a release batch

Review · state 1 of 2

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Serves S05.6 to S05.11 · FR-REL-002 · Swimlane 05 · Wireframe on page **74**

THE WIREFRAME'S NOTE Removing one scholar needs a reason, which the scholar sees; the scholar moves to a later batch and loses nothing (S05.6, S05.13). Returning the whole batch needs a reason too (S05.8).

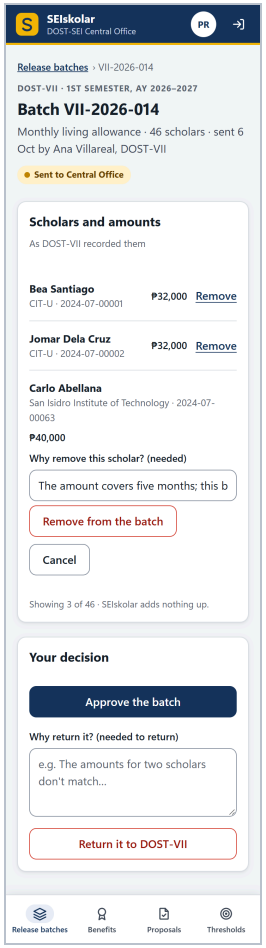

Phone · 360 px

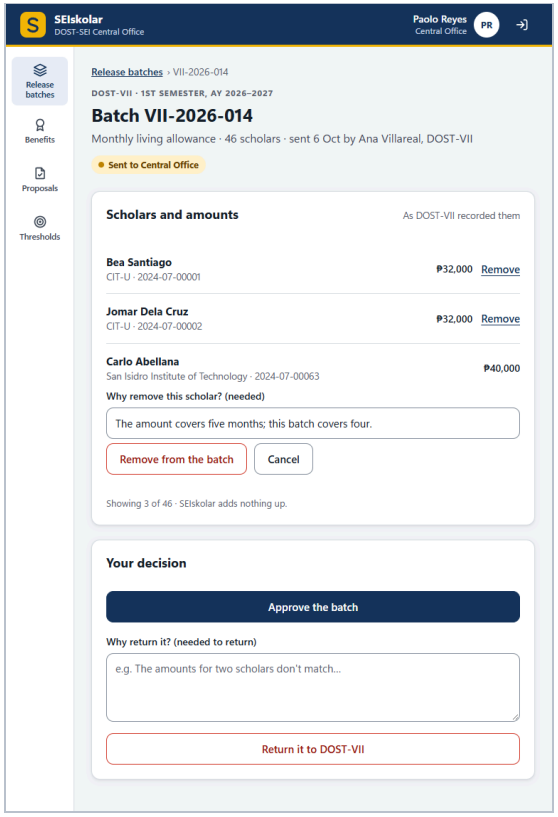

Tablet · 768 px

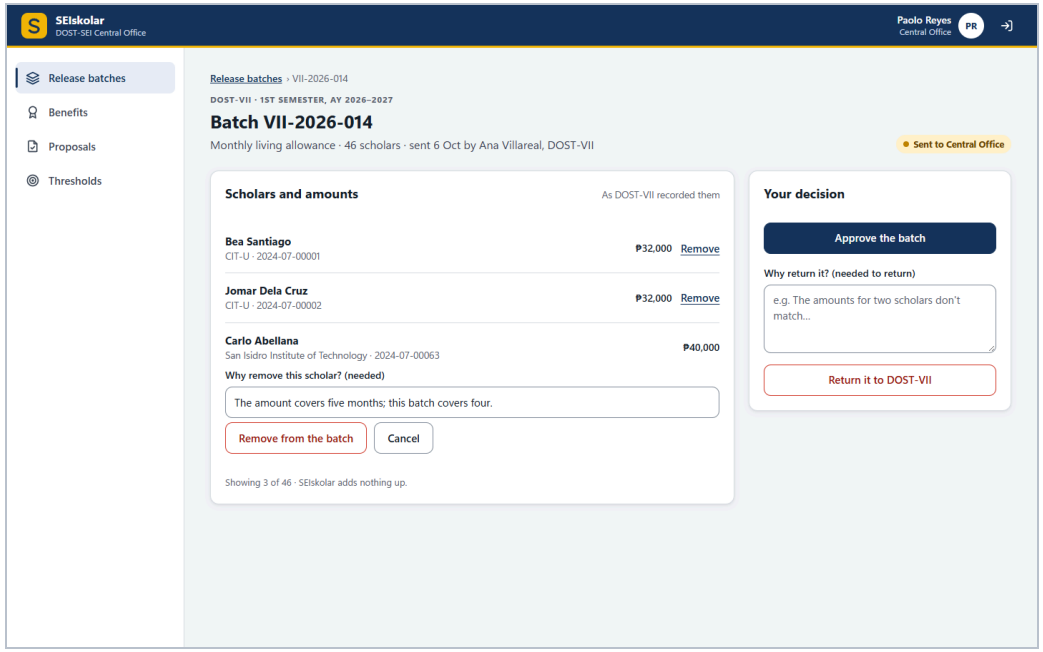

Desktop · 1440 px

Repository: `04-high-fidelity/central-batch.html?state=review` · Figma: page 04 High-fidelity, section central-batch.html, frames `central-batch--review.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 24 OF 29

Central Office: a release batch

Approved · state 2 of 2

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Serves S05.6 to S05.11 · FR-REL-002 · Swimlane 05 · Wireframe on page **75**

THE WIREFRAME'S NOTE SEIskolar records the release and its date. It cannot see the money reach anyone's account (FR-REL-003).

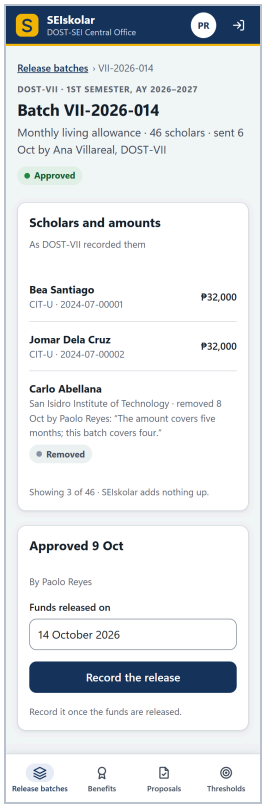

Phone · 360 px

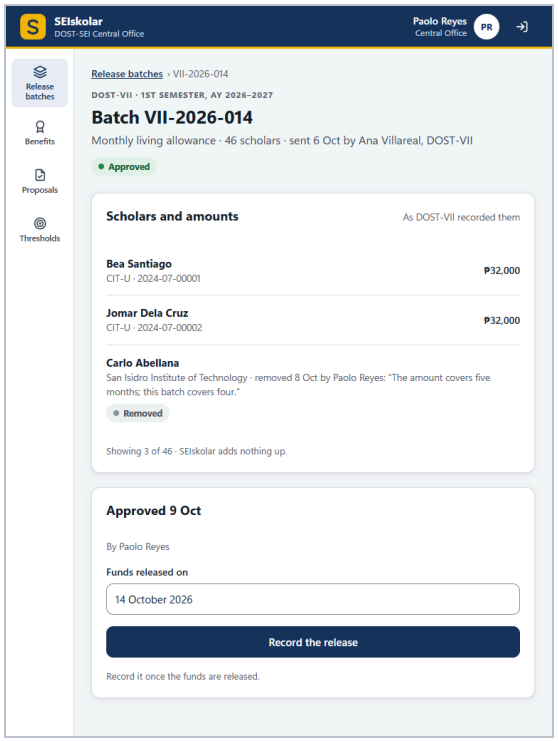

Tablet · 768 px

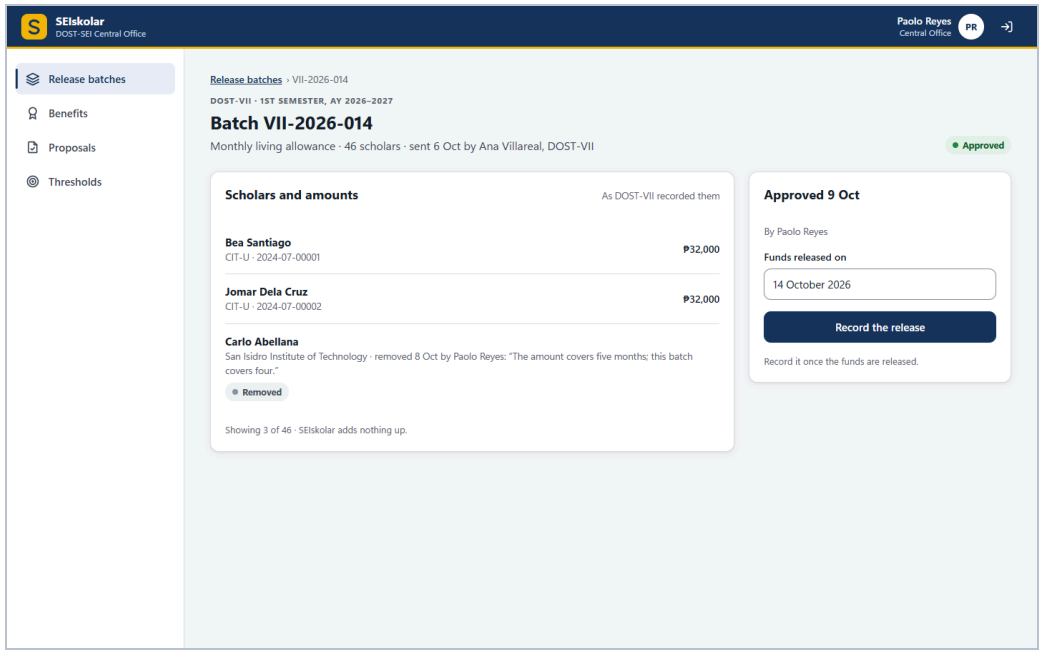

Desktop · 1440 px

Repository: `04-high-fidelity/central-batch.html?state=approved` · Figma: page 04 High-fidelity, section central-batch.html, frames `central-batch--approved.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 25 OF 29

Central Office: benefits

Benefits · state 1 of 3

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Serves S07.7, S07.8 · FR-BEN-001, FR-BEN-002 · Swimlane 07 · Wireframe on page **76**

THE WIREFRAME'S NOTE Every change keeps who made it and the reason (S07.8). Ceilings here are sample values; the real list starts from the Agreement's §VI. A Regional Office can only propose a change (FR-BEN-002).

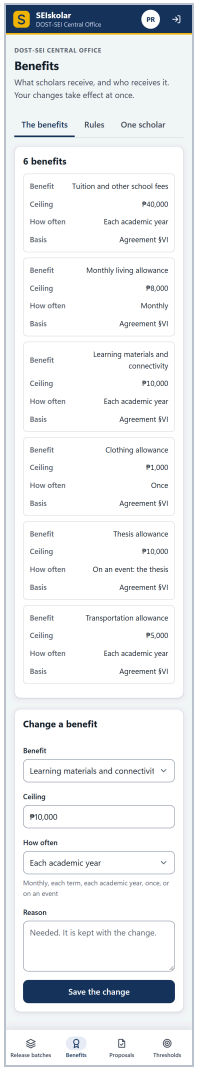

Phone · 360 px

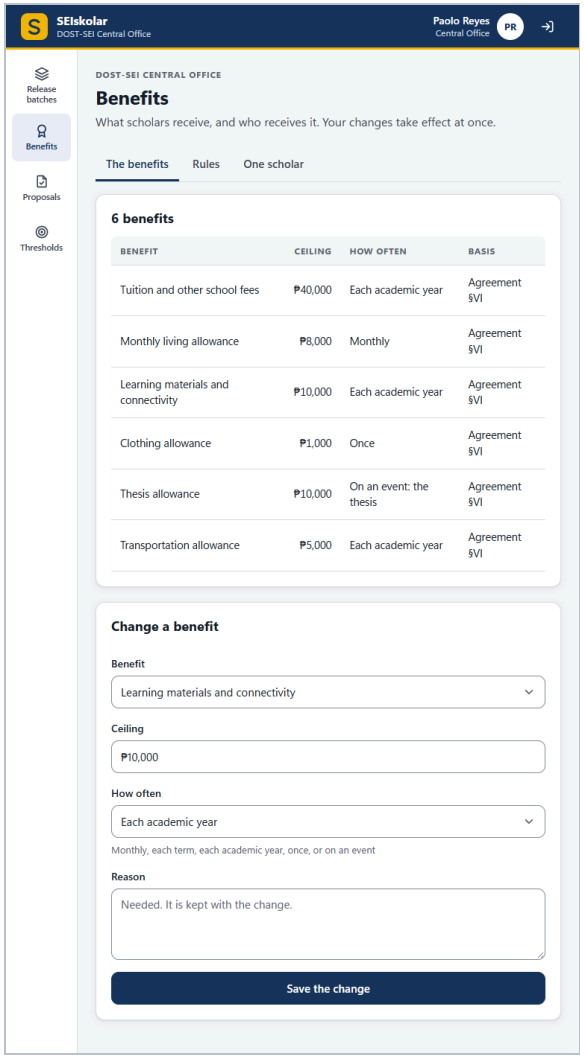

Tablet · 768 px

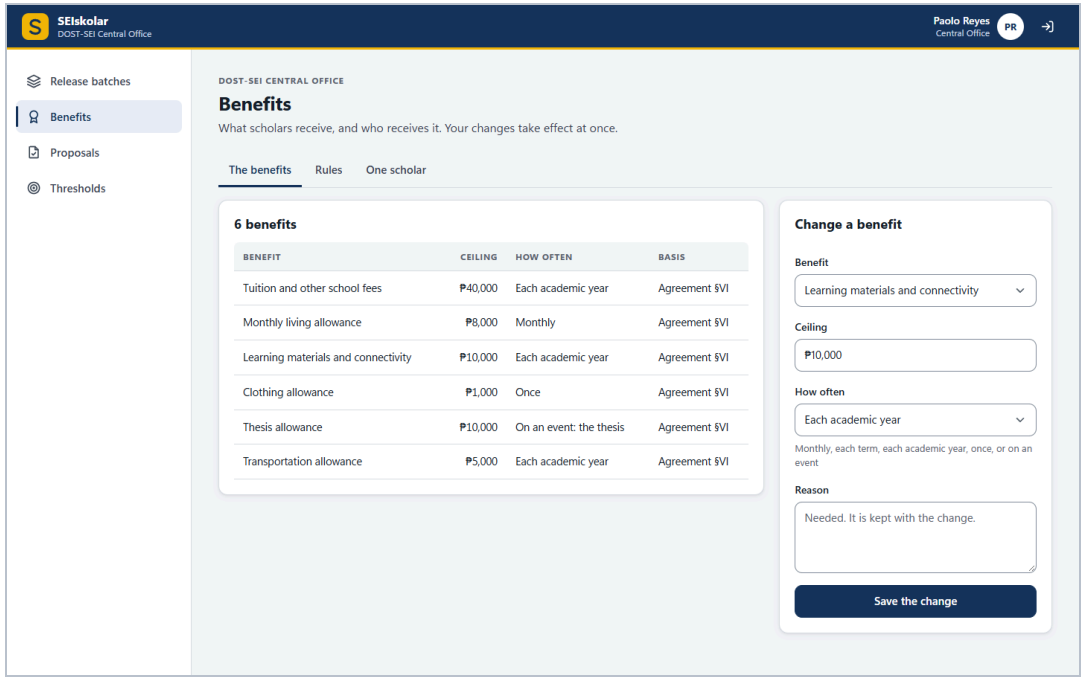

Desktop · 1440 px

Repository: `04-high-fidelity/central-benefits.html?state=benefits` · Figma: page 04 High-fidelity, section central-benefits.html, frames `central-benefits--benefits.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 25 OF 29

Central Office: benefits

Rules · state 2 of 3

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Serves S07.7, S07.8 · FR-BEN-001, FR-BEN-002 · Swimlane 07 · Wireframe on page **77**

THE WIREFRAME'S NOTE Every change keeps who made it and the reason (S07.8). Ceilings here are sample values; the real list starts from the Agreement's §VI. A Regional Office can only propose a change (FR-BEN-002).

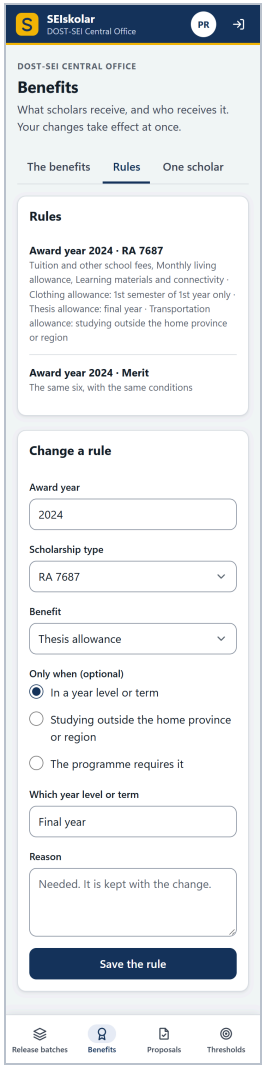

Phone · 360 px

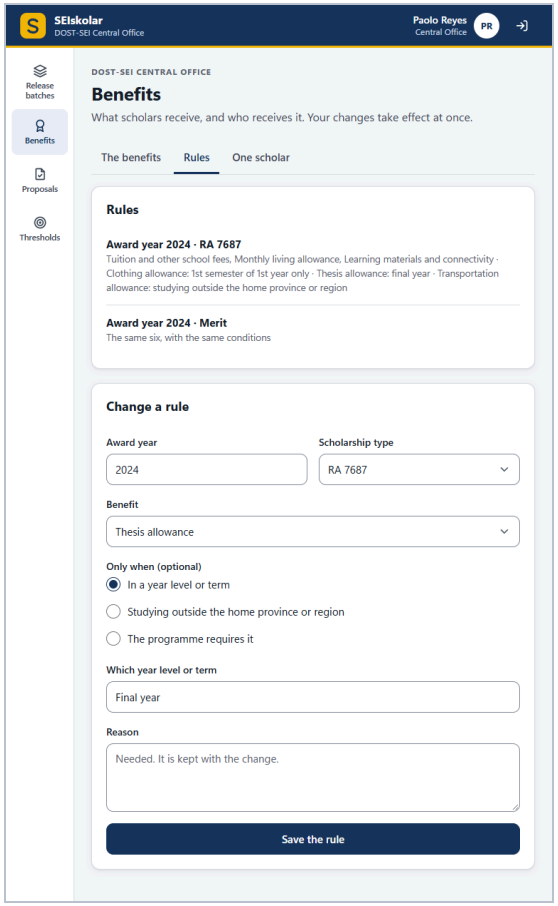

Tablet · 768 px

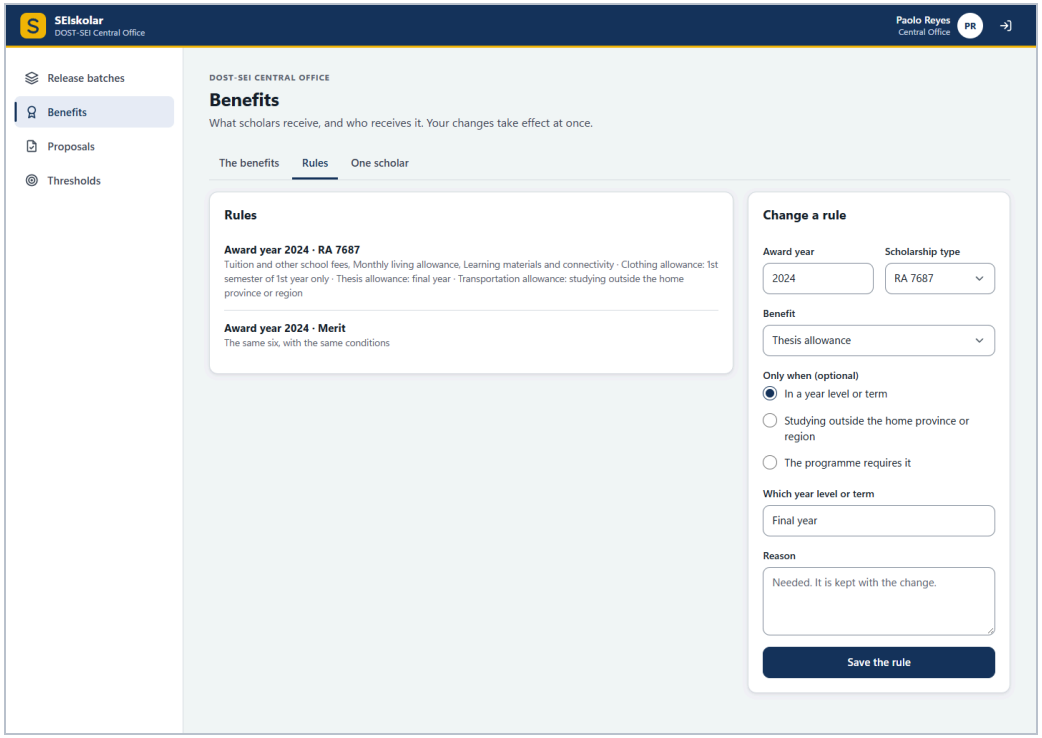

Desktop · 1440 px

Repository: `04-high-fidelity/central-benefits.html?state=rules` · Figma: page 04 High-fidelity, section central-benefits.html, frames `central-benefits--rules.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 25 OF 29

Central Office: benefits

Scholar · state 3 of 3

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Serves S07.7, S07.8 · FR-BEN-001, FR-BEN-002 · Swimlane 07 · Wireframe on page **78**

THE WIREFRAME'S NOTE Every change keeps who made it and the reason (S07.8). Ceilings here are sample values; the real list starts from the Agreement's §VI. A Regional Office can only propose a change (FR-BEN-002).

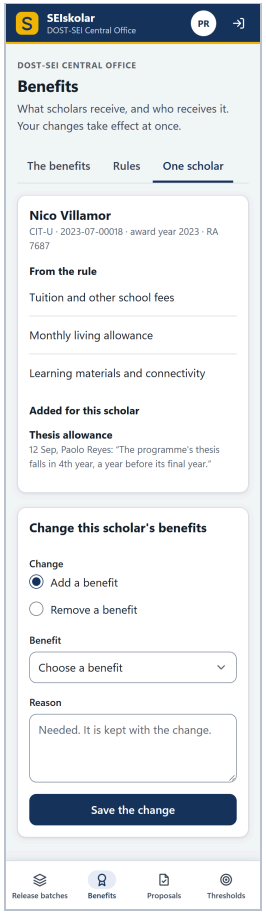

Phone · 360 px

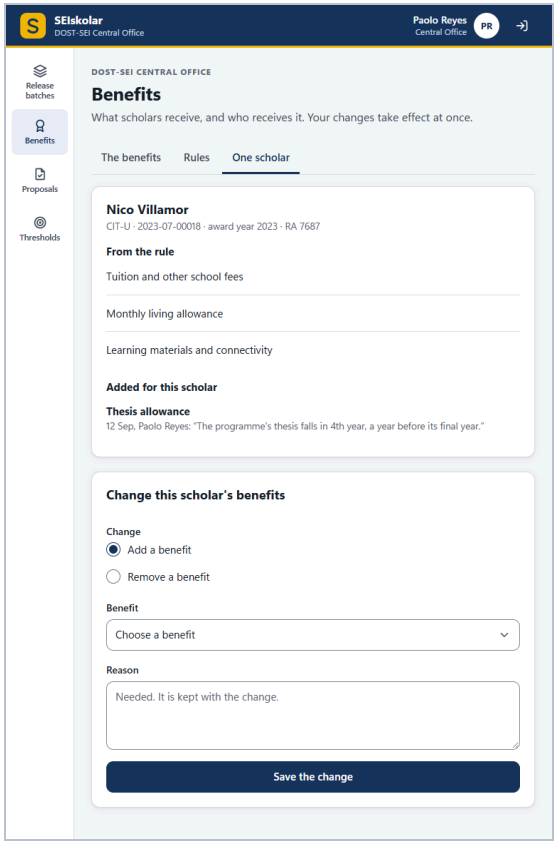

Tablet · 768 px

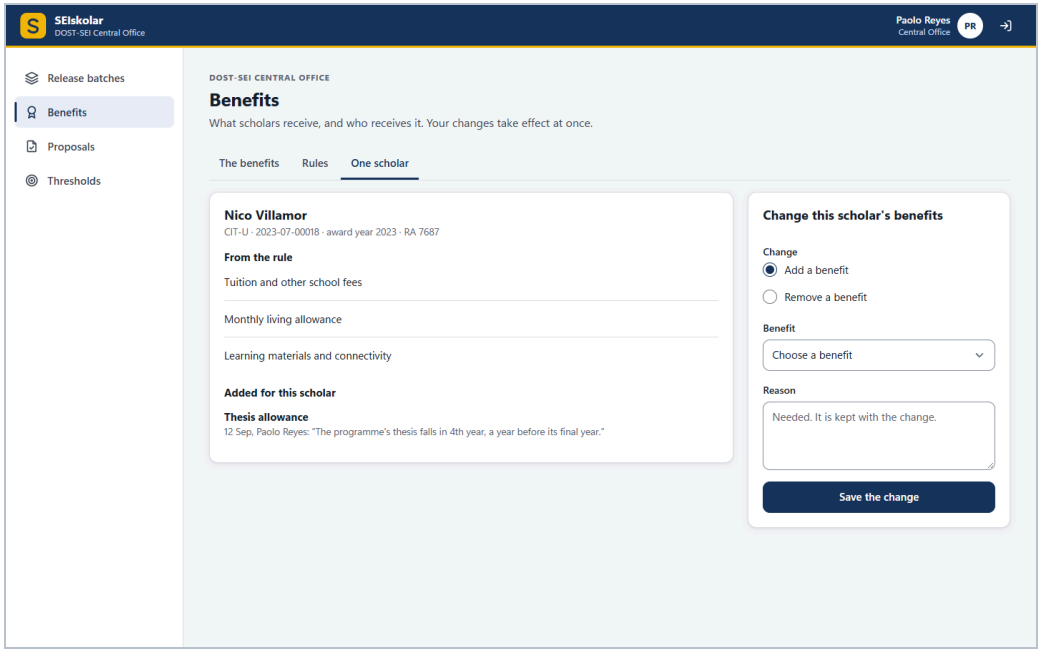

Desktop · 1440 px

Repository: `04-high-fidelity/central-benefits.html?state=scholar` · Figma: page 04 High-fidelity, section central-benefits.html, frames `central-benefits--scholar.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 26 OF 29

Central Office: proposals

Owner: Adrian Seth Tabotabo (@dreeyanzz)

Serves S07.3, S07.4, S07.6 · FR-BEN-002 · Swimlane 07 · Wireframe on page **79**

THE WIREFRAME'S NOTE Approving makes the change at once (S07.6). Rejecting needs a reason, which the Regional Office sees (S07.4, S07.5).

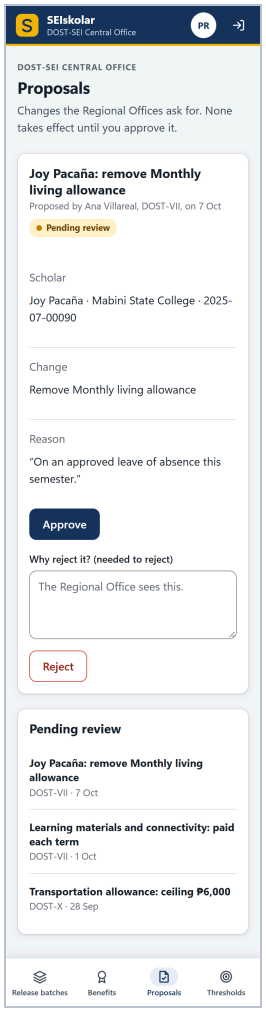

Phone · 360 px

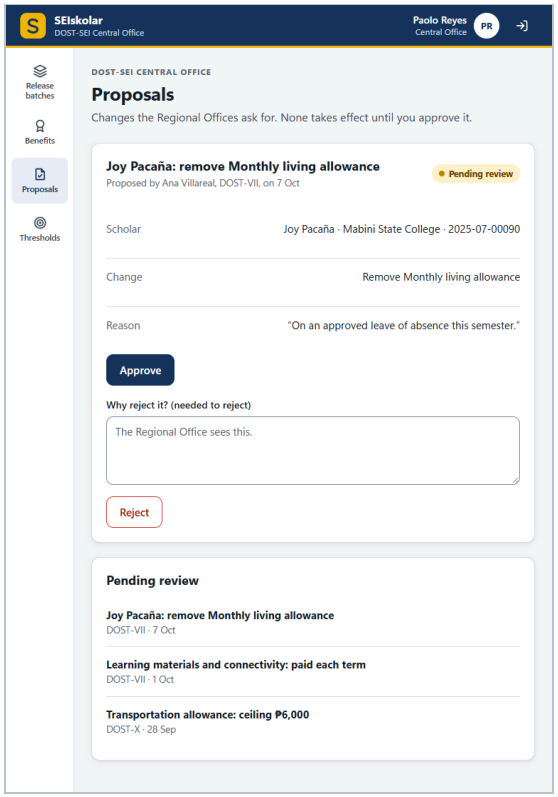

Tablet · 768 px

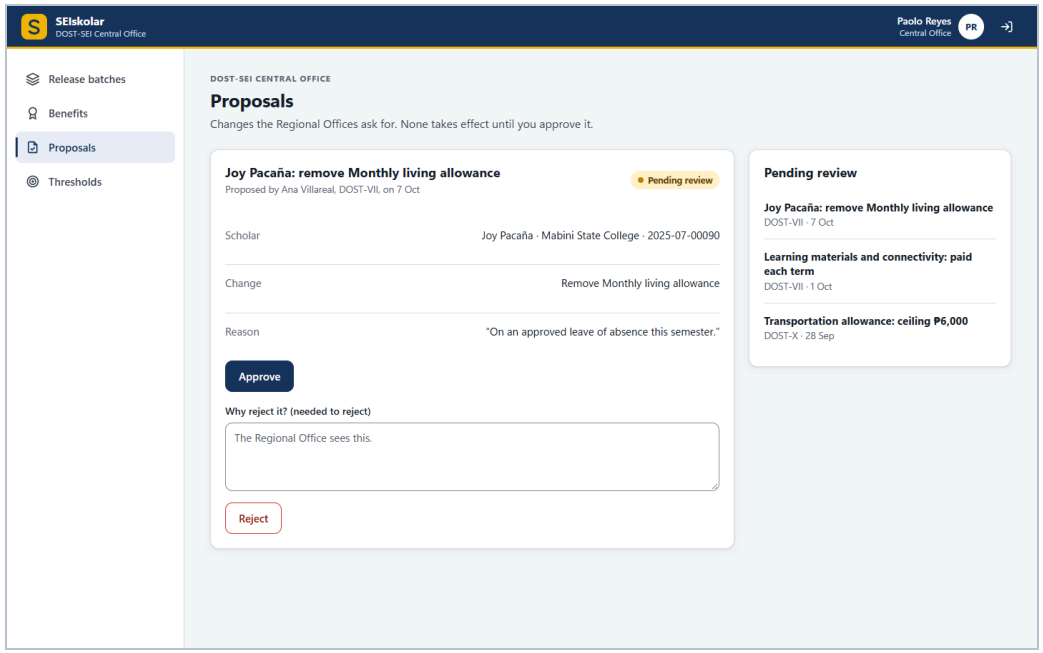

Desktop · 1440 px

Repository: `04-high-fidelity/central-proposals.html` · Figma: page 04 High-fidelity, section central-proposals.html, frames `central-proposals.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 27 OF 29

Central Office: thresholds

Owner: Althea Maeve Kinaadman (@Tiamporado)

Serves S09.4, S09.5 · FR-ADM-003 · Swimlane 09 · Wireframe on page **80**

THE WIREFRAME'S NOTE Each school's coordinator sets its scale and passing grade (S09.2); Central Office sets only the threshold (S09.4). Scholars see whether a term's average meets it, never a verdict on their standing (S09.6, FR-ADM-003).

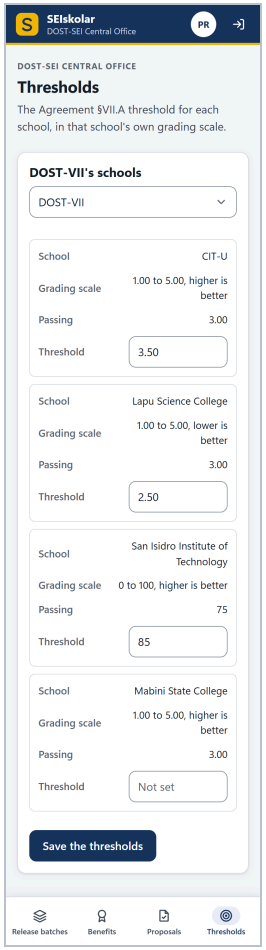

Phone · 360 px

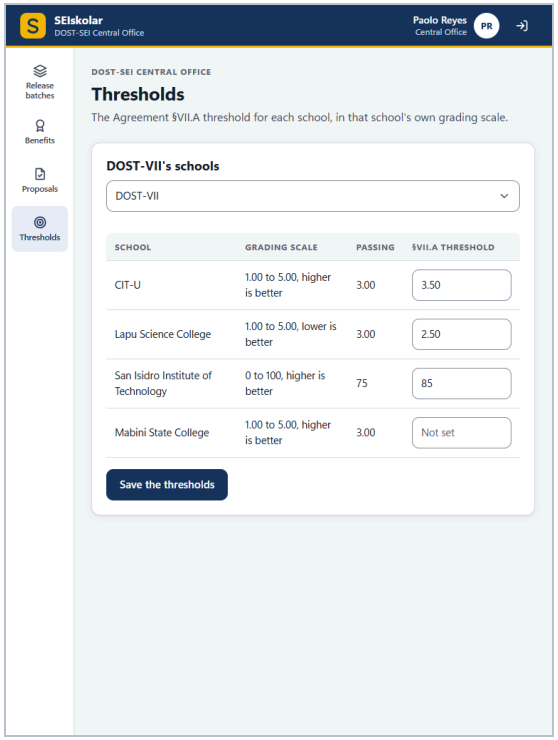

Tablet · 768 px

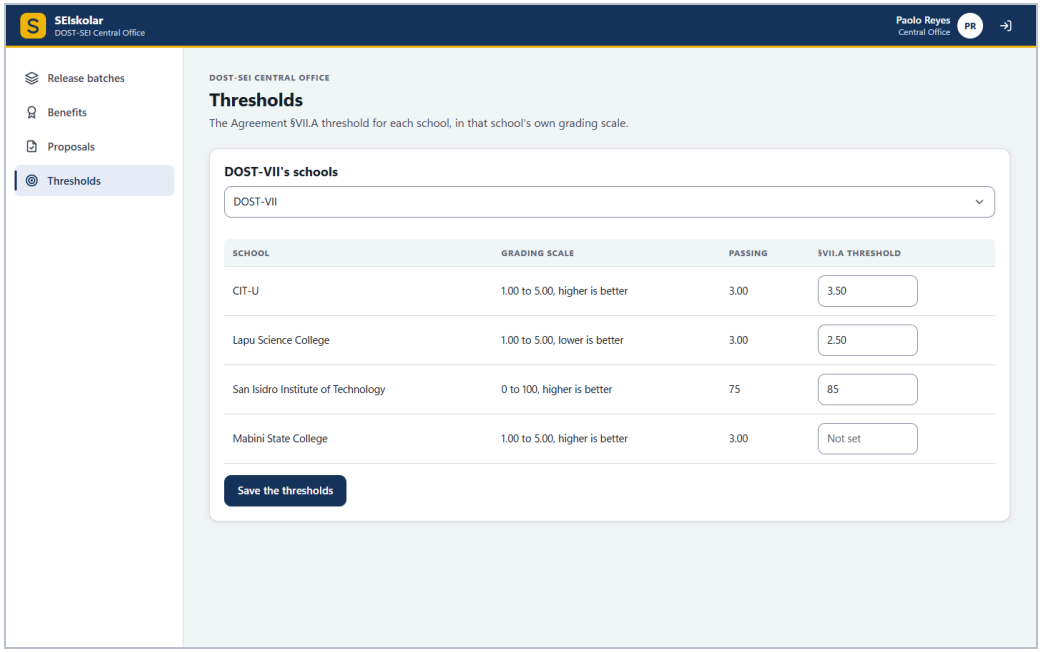

Desktop · 1440 px

Repository: `04-high-fidelity/central-thresholds.html` · Figma: page 04 High-fidelity, section central-thresholds.html, frames `central-thresholds.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 28 OF 29

Administrator: DOST staff accounts

Owner: Genril Theo Soroño (@gnthril)

Serves S08.2, S08.3 · FR-ADM-001 · Swimlane 08 · Wireframe on page **81**

THE WIREFRAME'S NOTE The system administrator creates DOST staff accounts only. Schools, coordinators and scholars are the Regional Office's (FR-ADM-001), and the administrator makes no program decision (SRS §1.3).

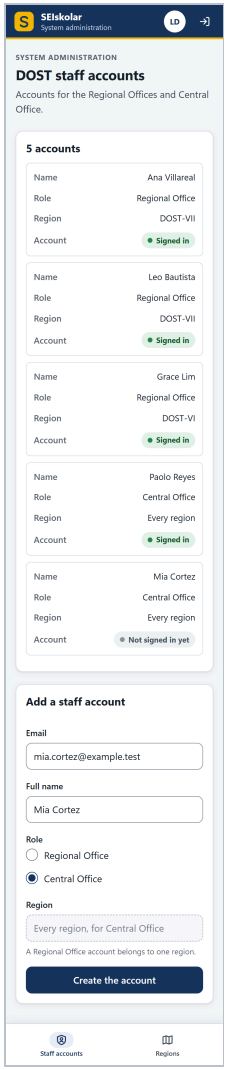

Phone · 360 px

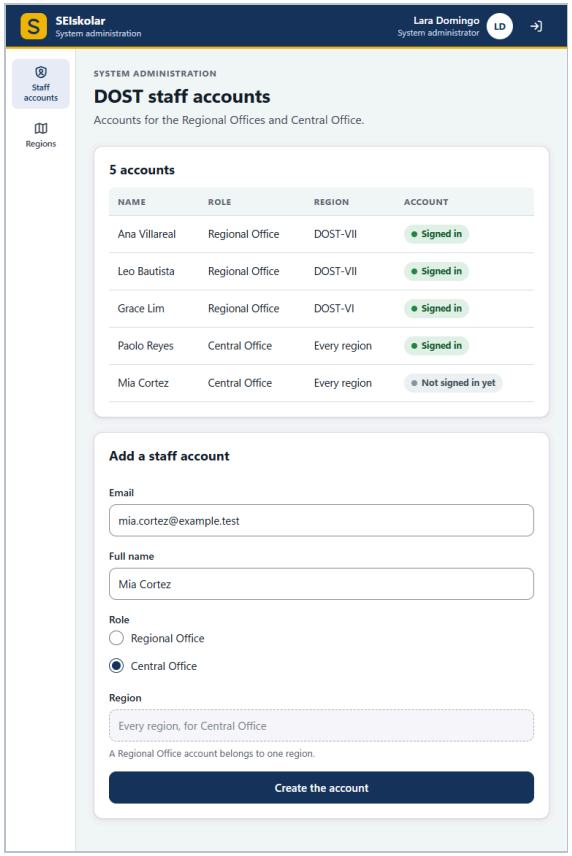

Tablet · 768 px

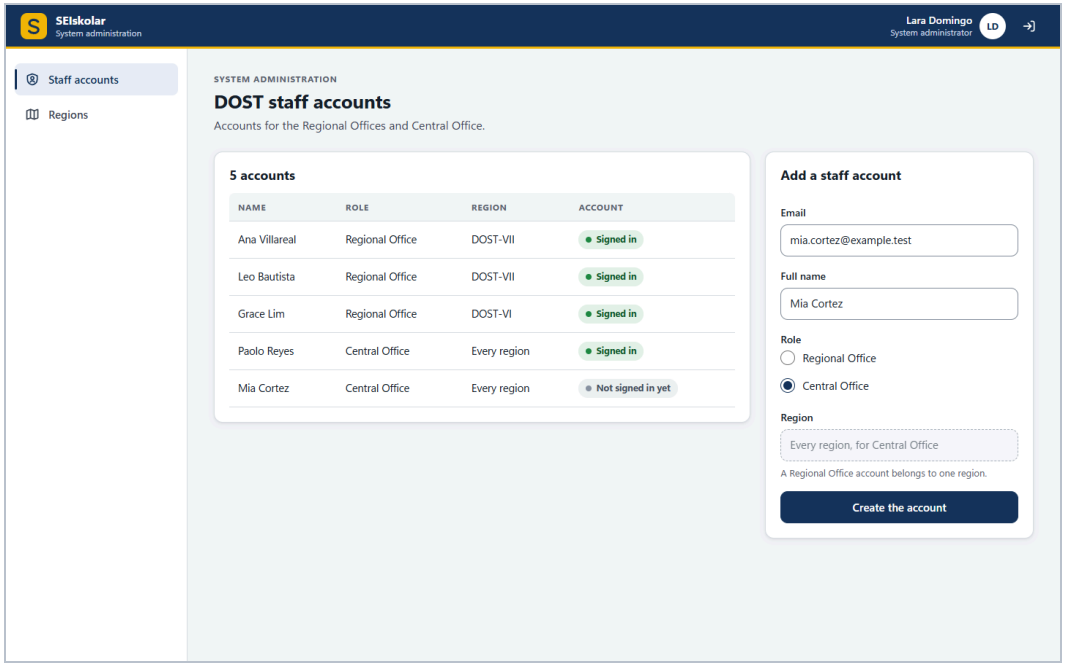

Desktop · 1440 px

Repository: `04-high-fidelity/admin-staff-accounts.html` · Figma: page 04 High-fidelity, section admin-staff-accounts.html, frames `admin-staff-accounts.phone`, `.tablet`, `.desktop`

HIGH-FIDELITY SCREEN 29 OF 29

Administrator: regions

Owner: Dorothy Biatriz Capao (@dbeenutsz)

Serves S08.1 · SRS §4.1 "Maintain Reference Data" · Swimlane 08 · Wireframe on page 82

THE WIREFRAME'S NOTE The fields are the SRS's regions table (§4.3). A region stops being used on its end date.

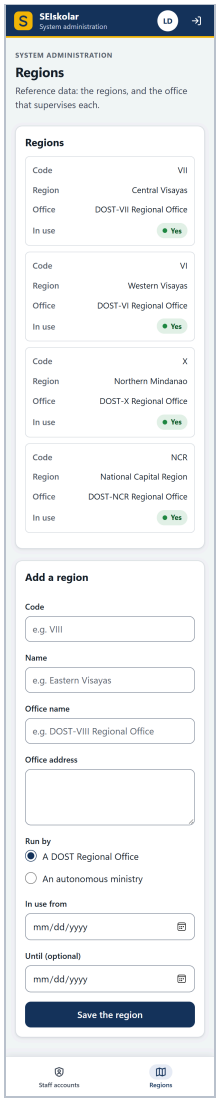

Phone · 360 px

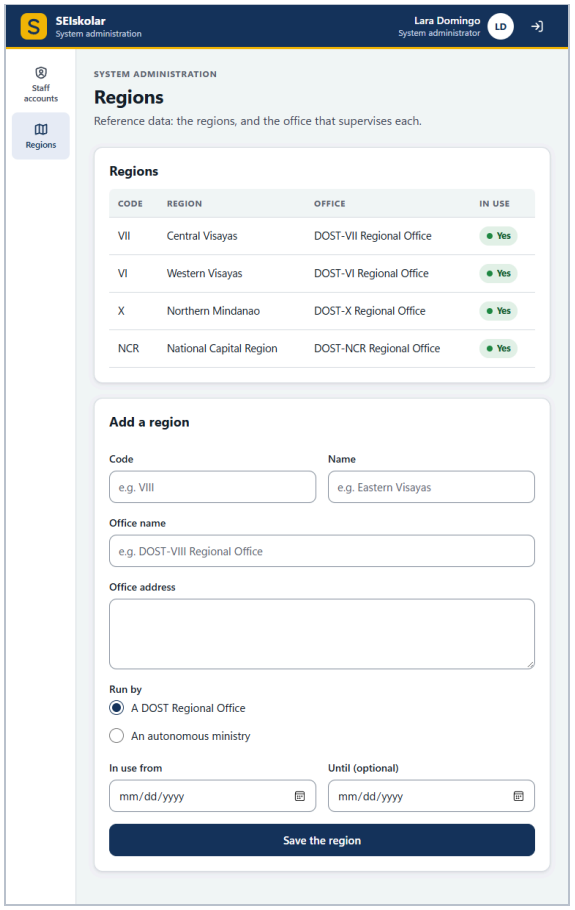

Tablet · 768 px

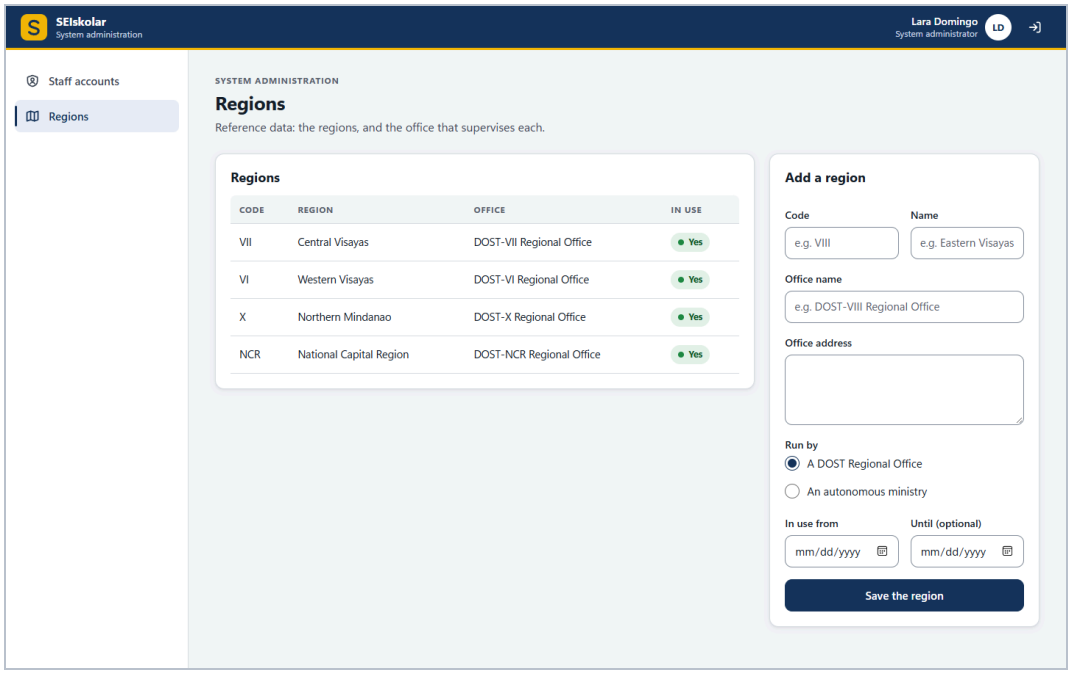

Desktop · 1440 px

Repository: `04-high-fidelity/admin-regions.html` · Figma: page 04 High-fidelity, section admin-regions.html, frames `admin-regions.phone`, `.tablet`, `.desktop`

D The design in Figma

The course needs the design in Figma as editable layers (Adrian, 26 October 2026). Every picture in Parts A to C is a frame in the team's Figma file.

SEIskolar – current design (Asph), made on 26 October 2026 for this copy. Each frame was drawn from the same HTML as the pictures in this document, by the team's tools in the repository (`tools/figma/`), not by hand: text is Figma text, boxes are frames with their fills, borders, corners and shadows, and icons and arrows are vectors. The frames are set in Inter, which Figma has built in, so they look the same on every computer; a few lines may wrap differently from these pictures.

Page in Figma	What it holds	Sections	Frames
00 Read me	What the file is, which commit it was drawn from, and that the repository is the source; and the card "Who owns what"	1	1
02 Swimlanes	One section per swimlane, each with its one frame (Part A)	10	10
03 Low-fidelity	One section per wireframe: a row per state, phone, tablet and desktop left to right (Part B)	29	126
04 High-fidelity	The same for the finished screens (Part C)	29	126

Finding a frame

Each frame has the name of the picture it copies, without `.png`: frame `scholar-requirement--returned.phone` is `04-high-fidelity/scholar-requirement--returned.phone.png`. Every screen page in this document names its frames at its foot, so anyone can go from a page here to its frame in Figma, and from there to its wireframe, its swimlane steps and its SRS requirements.

Labelled by owner

On pages 02, 03 and 04 every section is tinted in its owner's colour and tagged above with their name (68 tags), and each page opens with a legend, "Who owns what on this page". The labels are drawn from the same indexes as this document, so the two agree.

Who owns what

Team Asph divided the design evenly on 26 October 2026, whoever did the work. On every other page, each section is tinted in its owner's colour and tagged above. The repository is the source: each item's owner is in its folder's index.

Adrian Seth Tabotabo (@dreeyanzz), purple
Swimlanes: 05 Release a batch, from cleared to released; 07 Change a benefit, or propose a change.
Screens, low and high fidelity: Regional Office: release batches; Regional Office: benefit proposals; Central Office: release batches; Central Office: a release batch; Central Office: benefits; Central Office: proposals.

Genril Theo Soroño (@gnthril), blue
Swimlanes: 01 Sign in, and reach only your own screens; 03 File a Periodic Report.
Screens, low and high fidelity: Sign in; Account not ready; Nothing to show; Scholar: dashboard; Scholar: a requirement; Administrator: DOST staff accounts.

Althea Maeve Kinaadman (@Tiamporado), pink
Swimlanes: 06 Settle a school's tuition; 09 Set up the school portal: branding, grading, thresholds.
Screens, low and high fidelity: Scholar: stipend and tuition; Coordinator: tuition remittances; Coordinator: portal settings; Regional Office: tuition remittances; Central Office: thresholds.

Zedric Camilotes (@zedric-git), orange
Swimlanes: 04 Check a filing: claim, verify or return, then resubmit; 10 Look up who did what to a record.
Screens, low and high fidelity: Coordinator: home; Regional Office: home; Regional Office: checklist and deadline; Regional Office: queue; Regional Office: check a filing; A record's history.

Dorothy Biatriz Capao (@dbeenutsz), green
Swimlanes: 02 Set up a term: calendar, requirement names, checklist, deadline; 08 Set up a school and its people, and record a transfer.
Screens, low and high fidelity: Coordinator: academic calendar; Coordinator: requirement names; Regional Office: schools; Regional Office: accounts; Regional Office: transfers; Administrator: regions.

The card "Who owns what", on the page 00 Read me, exported from the Figma file on 26 October 2026.

A section in Figma, and keeping it the same as the repository

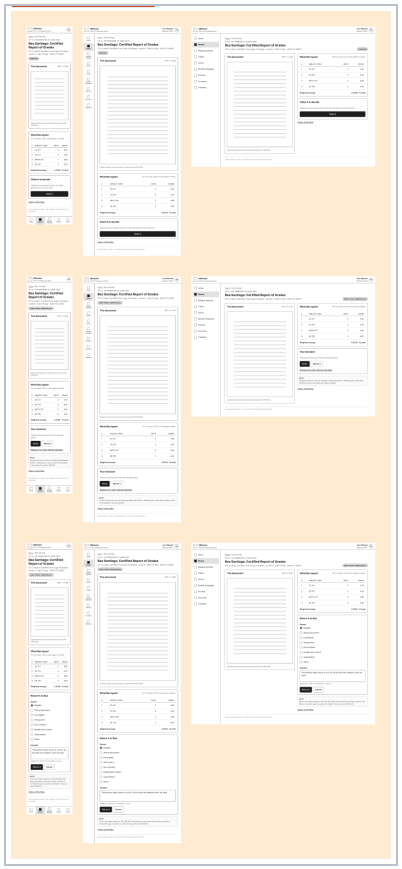

03 Low-fidelity, section regional-review.html: three states in three rows, phone, tablet and desktop in each, tinted in Zedric's orange.

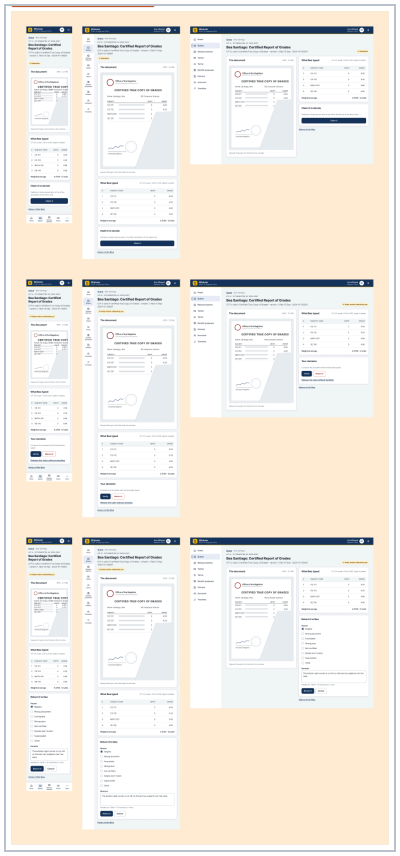

04 High-fidelity, the same section finished. Compare pages **60** and **104** onwards.

Who owns what on this page

Each section is tinted in its owner's colour and tagged above. The work was divided evenly on 26 October 2026, whoever did it: every member owns two swimlanes and five or six screens, and a wireframe and its high-fidelity screen have the same owner. The repository is the source: each item's owner is in its folder's index (02-swimlanes/README.md, 03-low-fidelity/README.md, 04-high-fidelity/README.md). Change it there first.

Adrian Seth Tabotabo (@dreeyanzz), purple
Regional Office: release batches · Regional Office: benefit proposals · Central Office: release batches · Central Office: a release batch · Central Office: benefits · Central Office: proposals

Genril Theo Soroño (@gnthril), blue
Sign in · Account not ready · Nothing to show · Scholar: dashboard · Scholar: a requirement · Administrator: DOST staff accounts

Althea Maeve Kinaadman (@Tiamporado), pink
Scholar: stipend and tuition · Coordinator: tuition remittances · Coordinator: portal settings · Regional Office: tuition remittances · Central Office: thresholds

Zedric Camilotes (@zedric-git), orange
Coordinator: home · Regional Office: home · Regional Office: checklist and deadline · Regional Office: queue · Regional Office: check a filing · A record's history

Dorothy Biatriz Capao (@dbeenutsz), green
Coordinator: academic calendar · Coordinator: requirement names · Regional Office: schools · Regional Office: accounts · Regional Office: transfers · Administrator: regions

The legend at the top of the page 04 High-fidelity.

The repository stays the source

- A drawing is changed in the repository first, in a pull request, and then copied into Figma again. A frame changed only in Figma would disagree with the repository the course reviews.
- Copying, not redrawing: 262 frames redrawn by hand would take weeks and drift from the repository at once (risk T2, Part E). So the tools read each drawing out of the browser and draw it in Figma, one frame at a time, and a frame that disagrees with the repository can be redrawn with one command.
- Owners follow the indexes: to change an owner, change the index in a pull request, then label the file again.
- Still to come (WBS 4.10, proposed for 2 to 14 November): the high-fidelity screens' repeated parts, such as buttons, badges, cards and the navigation, made into Figma components by hand.

E Project plan: risk matrix, WBS and Gantt chart

The course's Software Design Deliverable Package, as updated in the repository (05-risk-matrix-and-gantt/RISK-MATRIX-AND-GANTT.md): updated on 12 October 2026, and for Figma on 26 October 2026.

Risk matrix, work breakdown structure and Gantt chart, updated on 12 October 2026, and for Figma on 26 October 2026

Group name: Asph
Team members: Adrian Seth Tabotabo (Project Manager) · Genril Theo Soroño · Althea Maeve Kinaadman · Zedric Camilotes · Dorothy Biatriz Capao
Institution and course: Cebu Institute of Technology – University (CIT-U) | Software Design
Project: SEIskolar, the software design of a system for DOST-SEI undergraduate scholars: filing the per-term Periodic Report, checking it, and seeing where each scholar's stipend and tuition stand
Timeline: 17 August 2026 to 10 December 2026, the final presentation
Scope: design only. Requirements, swimlanes, wireframes and finished screens; nothing is implemented (AGENTS.md, "There is no code here").

This is the updated version. The team submitted the first version of this package for the course on 11 September 2026. That version is unchanged in the archived repository: the Markdown document and the submitted .docx. On 12 October 2026 Adrian asked for the package to come back into this repository, updated for the rebuild of 7 October. What changed, and why:

- **The repository.** On 7 October 2026 the design moved to this repository, which holds only the SRS and the drawings built from it. The rest of the earlier design work (the concept paper, the architecture, the ADRs, the subsystem designs, the design protocol and the brand guidelines) stays in the archived repository, `dreeyanzz/seiskolar-archive`. Part 1's list of artifacts is rewritten for this.
- **The schedule.** Part 3 now shows what was done and when, with dates taken from both repositories' git history and from the SRS's revision history, and keeps the submitted plan for what is still ahead. Most of the design work happened earlier than planned.
- **The risks.** Seven of the nine risks stand as the team rated them in September, with mitigations that now point at what this repository holds. Two no longer apply and are replaced: T2 (a local database drifting from the cloud one: there is no database any more) and E1 (the overhead of the four-artifact design protocol, which this repository does not use). **The new T2 and E1, and their ratings, are proposals for the team to confirm.**
- **The grid.** Two cells of the submitted 5×5 grid were in the wrong zone for its own legend: likelihood 5 with impact 3 scores 15, which is red, not yellow; likelihood 3 with impact 2 scores 6, which is green, not yellow. Both are corrected.
- **The team.** Asph has five members. The submitted version listed four, and spelled Dorothy Biatriz Capao's name as "Beatriz Capao".
- **Figma (26 October 2026).** Adrian settled the question risk T2 turned on: the course needs the design in Figma, as editable layers. The design is copied into a new Figma file by tools in this repository, `tools/figma/`, and the earlier file is labelled as the earlier design. T2's mitigation, WBS tasks 4.9 and 4.10, the Gantt chart and "Still open" say so.

Since the package was last updated

Later on 26 October 2026, the design was copied into Figma: every drawing was imported into “SEIskolar – current design (Asph)” as editable layers, the faults the first import showed were fixed and the frames redrawn, the screens were divided evenly between the five members, and the file was labelled by owner (Part D). Those fixes, the even division and the labels are on branches and in pull request #11, awaiting review. WBS 4.9 stays in progress until they merge and the earlier Figma file, “Asph – SEIskolar”, is labelled as the earlier design, which the repository does not yet record as done.

Part 1: Preliminary research and artifacts inventory

The team researched the problem before designing, rather than assuming it. The research is unchanged since September; only where each finding is written down has moved.

1. Empirical field research and technical folder audit

- **CIT-U DOST-VII live Google Drive audit, 28 and 30 August 2026.**
  - *Where it is written down:* the SRS, §1.1, in this repository (`01-srs/SRS.md`), and the concept paper, §2.5, in the archive (`docs/00-concept-paper.md`).
  - *Primary evidence:* a direct audit of the production Google Drive folder, created on 20 June 2022 and holding six cohorts of scholars.
  - *Findings:*
    1. **W1, the link is the credential.** Sharing was set to `type: anyone · role: writer`, with no sign-in: anyone on the internet with the link could read or change scholars' records.
    2. **W2, inverted custody.** Scholars' folders were owned by their personal `@gmail.com` accounts. The DOST Regional Office, which supervises the records, was only a guest editor.
    3. **W3, no status.** Nothing showed whether a filed document had been verified or returned.
    4. **W4, pull verification.** Checkers opened folders one by one, with no work queue and no way to see what had changed.
    5. **W5, no structure.** Two scholars in the same batch named the same documents in five different ways, across five folder levels.

2. Legal, statutory and regulatory framework

- **Laws:**
  - Republic Act No. 7687, the Science and Technology Scholarship Act of 1994.
  - Republic Act No. 10612, the Fast-Tracked S&T Scholarship Act.
  - Republic Act No. 10173, the Data Privacy Act of 2012: the security of sensitive personal information such as grades and guardians' details.
- **The DOST-SEI Scholarship Agreement**, the 2024 notarised contract, analysed in the concept paper's §10 and its reference 1 (archive):
  - §VI: the financial assistance, and its auditing limits.
  - §VII.A and §VII.C: the Periodic Report (the Study Load at the start of a term and the Certified True Copy of Grades at its end) and the grade requirements.
  - §VIII and §IX: supervision by the Regional Office against disbursement by the Central Office in Manila, and termination after two consecutive terms of non-compliance.
  - §XIII and §XIV: the parent or guardian's liability for refunds, and the limits of the data privacy consent.

3. State audits and service benchmarks

Written down in the concept paper, §2.4, with its sources in its §11 references (archive):

- **Commission on Audit findings, December 2024** (references 4 and 5): DOST-SEI flagged for about ₱1.75 billion in fund transfers to universities still unaccounted for (only 16.40% of the ₱642.109 million transferred in 2023 was liquidated), and stipend delays of 1 to 12 months, recurring since 2015.
- **DOST-SEI Citizen's Charter 2025** (reference 2): the published service standard for Monitoring of Scholarship Status is **one hour per scholar**. UP's core group ran four staff against 2,000 scholars (reference 6), so a queue takes weeks.

4. Design artifacts

In this repository, `dreeyanzz/seiskolar`. Each is built only from the one before it, except this package, which plans the work:

Artifact	Path	What it holds
Software Requirements Specification	`01-srs/SRS.md`	Version 2.2. Problem, scope and stakeholders; the permission matrix; 24 functional requirements (FR-IAM, FR-SCH, FR-CHK, FR-MON, FR-REL, FR-TUI, FR-BEN, FR-ADM); use cases, the state machine and the ERD; NFRs; MoSCoW; acceptance criteria; the traceability matrix.
Swimlanes	`02-swimlanes/`	10 workflows with 107 numbered steps (`S01.1` …), covering all 24 functional requirements.
Low-fidelity wireframes	`03-low-fidelity/`	29 screens with 42 states, each drawn for a phone, a tablet and a desktop, each citing the swimlane steps it serves.
High-fidelity screens	`04-high-fidelity/`	The 29 screens finished, as one clickable prototype that meets WCAG 2.1 AA, in the school's colours inside its portal.
This package	`05-risk-matrix-and-gantt/`	The risk matrix, the work breakdown structure and the Gantt chart.
The design in Figma	`tools/figma/`	The tools that copy every swimlane, wireframe and screen into the Figma file SEIskolar – current design (Asph) as editable layers, one frame per PNG. The repository stays the source.
Guide for AI agents and members	`AGENTS.md`	How the repository is worked on: the rules of the chain, writing everything in full, git and pull requests.

Earlier design work, in the archive, `dreeyanzz/seiskolar-archive`, as it stood on 5 October 2026 (commit `23cfa31`):

Artifact	Path	What it holds
Concept paper, revision 0.4	`docs/00-concept-paper.md`	The problem, the five weaknesses, the evidence (marked reported or observed), scope, and the Agreement.
Architecture and detailed design	`docs/01-software-architecture-design.md`	The C4 container view, the full ERD with the release, tuition and benefit tables, the auth and upload flows, and the component structure.
Software design protocol	`docs/03-software-design-protocol.md`	The four artifacts each feature's design needed: sequence flow, state contracts, components, and a security and test matrix.
Architecture Decision Records	`docs/adr/`	ADRs 0001 to 0017: each decision, and the alternatives it rejected.
Subsystem designs	`docs/design/`	Nine designs: tenancy and auth, submission, the RLS model, storage, the audit log, the checker queue, the admin console, scheduled work, and supervising against signatory regions.
Brand guidelines	`docs/02-brand-guidelines.md`	Colour tokens, typography and accessibility rules. The screens in `04-high-fidelity/` use their own palette, which also meets WCAG 2.1 AA.
Open questions and postmortems	`docs/OPEN-QUESTIONS.md`, `notes/`	The stakeholder questions, including number 26, which the SRS cites; nine postmortems.

Artifact	Path	What it holds
The working prototype	tag `prototype-final`	Built from 29 August to 24 September 2026 to test the design, then removed from the design repository on 25 September.
First swimlanes, wireframes and hi-fi	`docs/FIGMA.md`, `docs/hifi/`	The first swimlanes and wireframes, drawn in Figma, and a first scholar-portal prototype. Replaced on 7 October by `02-swimlanes/` to `04-high-fidelity/`; the Figma file still holds its drawings.

Part 2: Project risk matrix (per the `Risk_Matrix.docx` rubric)

Step 1: Identified project risks (9 risks across 5 categories)

1. **Technology risks:**
   - `Risk T1 (Storage payload limit):` photos and scans of grade sheets taken on phones reach 8 to 12 MB, more than a serverless request accepts (for example Vercel's 4.5 MB body limit), so uploads would fail.
   - `Risk T2 (Design copies drift apart), new:` this repository holds the current swimlanes, wireframes and screens, while the Figma file still holds the earlier ones. Anyone who opens Figma, a reviewer or a teammate, sees designs the team no longer presents. This is already the case on 12 October 2026. On 26 October 2026 the course was found to need the design in Figma, so the copy must be current, not only labelled (Step 4 says how).
   - `Risk T3 (Cross-tenant data leakage):` a flaw in row-level security lets a scholar or another school's or region's staff see or change records that are not theirs.
2. **People and process risks:**
   - `Risk P1 (Design drift across the team):` several members, and the AI agents they work through, change the design at once, so names, states and rules stop agreeing across the SRS, the swimlanes and the screens.
3. **Organisational and legal risks:**
   - `Risk O1 (Data Privacy Act violation):` real scholars' personal information, failing grades or guardians' details end up in design documents or prototypes without a data sharing agreement with DOST-SEI (RA 10173).
   - `Risk O2 (Procedural resistance):` Regional Office checkers keep checking only after the deadline, out of habit, and do not use the early, continuous checking the design allows.
4. **Requirements risks:**
   - `Risk R1 (Incompatible grading scales):` schools grade in opposite directions (CIT-U uses 1.00 to 5.00 with 5.00 the best; UP uses 1.00 to 5.00 with 1.00 the best), so one national threshold would flag good students as failing.
   - `Risk R2 (Scope creep into disbursement):` stakeholders expect SEIskolar to move money: LandBank transactions, cheques or disbursement vouchers.
5. **Estimation risks:**
   - `Risk E1 (Drawing and documentation overhead), new:` every screen is drawn in two fidelities and for three devices, and every change is written up in full for the next agent (AGENTS.md, "Write everything in full"). This takes longer than quick sketches, and can squeeze the time left before the presentation.

Risks retired in this update, and why:

- The submitted **T2**, a local database drifting from the cloud one, applied to the prototype. The project has had no database since the prototype was removed on 25 September 2026.
- The submitted **E1**, the overhead of the four-artifact design protocol, applied to the protocol in the archive, which this repository does not use.

Step 2: Rate each risk (likelihood and impact, 1 to 5)

Risk ID	Category	Risk	Likelihood (L)	Impact (I)	Score (L × I)	Zone
`01`	**Organisational**	**Data Privacy Act violation with real scholars' data**	**4 (Likely)**	**5 (Catastrophic)**	**20**	**Red**

Risk ID	Category	Risk	Likelihood (L)	Impact (I)	Score (L × I)	Zone
T1	**Technology**	**Upload failure on large phone scans**	**4 (Likely)**	**4 (Serious)**	**16**	**Red**
R1	**Requirements**	**Incompatible grading scales and false failing flags**	**4 (Likely)**	**4 (Serious)**	**16**	**Red**
T3	**Technology**	**Cross-tenant data leakage through row-level security**	**3 (Moderate)**	**5 (Catastrophic)**	**15**	**Red**
R2	Requirements	Scope creep into disbursement and banking	3 (Moderate)	4 (Serious)	12	Yellow
O2	Organisational	Procedural resistance to checking before the deadline	4 (Likely)	3 (Moderate)	12	Yellow
T2	Technology	Design copies drift apart: repository and Figma (new, proposed)	4 (Likely)	3 (Moderate)	12	Yellow
P1	**People/Process**	**Design drift across the team and their AI agents**	**3 (Moderate)**	**3 (Moderate)**	**9**	**Yellow**
E1	Estimation	Drawing and documentation overhead (new, proposed)	3 (Moderate)	3 (Moderate)	9	Yellow

The new T2 is rated likely because it is already true, and moderate because it misleads rather than breaks anything. The new E1 keeps the rating of the risk it replaces, which described the same kind of overhead.

Step 3: 5×5 risk matrix grid

Impact ↑ · Likelihood →	1 · Very unlikely	2 · Unlikely	3 · Moderate	4 · Likely	5 · Very likely
5 · Catastrophic	5	10	T3 15	O1 20	25
4 · Serious	4	8	R2 12	T1, R1 16	20
3 · Moderate	3	6	P1, E1 9	O2, T2 12	15
2 · Minor	2	4	6	8	10
1 · Minimal	1	2	3	4	5

Red, score 15 to 25: critical; needs an immediate, written mitigation plan Yellow, 8 to 14: watched closely, with standard controls Green, 1 to 7: handled by routine practice

Every empty cell is labelled with the zone its score falls in by the legend. In the submitted grid, likelihood 5 with impact 3 (score 15) and likelihood 3 with impact 2 (score 6) were both labelled yellow; they are red and green.

Step 4: Prioritise the risks and choose the top 3

The top three are unchanged from the submitted version:

1. **Top risk 1: `O1` (organisational and legal):** a Data Privacy Act violation with real scholars' data (L = 4, I = 5, score 20, red).
2. **Top risk 2: `T3` (technology and security):** cross-tenant data leakage through row-level security (L = 3, I = 5, score 15, red).
3. **Top risk 3: `P1` (people and process):** design drift across the team and their AI agents (L = 3, I = 3, score 9, yellow).

Why some higher-scoring risks are not in the top three:

- **T1 and R1 (16 each)** were resolved by the design itself. T1: files go straight to private storage through a short-lived link, never through the server, up to 10 MB (SRS FR-SCH-002; swimlane 03, step S03.8). R1: each school sets its own grading scale and passing grade, and Central Office sets each school's threshold in that school's own scale (SRS FR-ADM-003; swimlane 09).
- **R2 (12)** is held by the SRS's scope: banking transactions are out of scope (SRS §1.2), and the release status tells the scholar that SEIskolar cannot see the money reach the account (FR-REL-003).
- **O2 (12)** depends on the Regional Office's practice, which the team does not control. The design already allows early checking: the queue never waits for the deadline (FR-CHK-001).
- **T2 (12)** turned on one question, whether the course needs the designs in Figma. Adrian settled it on 26 October 2026: it does, as editable layers. The mitigation is in two parts. First, the design is copied into a new file, SEIskolar – current design (Asph), by tools rather than by hand (`tools/figma/`): every frame is drawn from its HTML and named as its PNG, so a copy that disagrees with the repository can be redrawn with one command. Second, the earlier file, "Asph – SEIskolar", gets a banner on every page saying it is the earlier design and where the current one is. T2 stays open until both are done (WBS 4.9).

Step 5: Mitigation plans for the top 3 risks

Top risk 1: `O1`, a Data Privacy Act violation with real scholars' data

- **Avoidance:** the rule "Invented people only" (AGENTS.md, "The rules of the chain"): invented names, `@example.test` addresses, scholar numbers that are plainly fake, and never a teammate's name on a persona. It continues ADR 0006 (archive).
- **Minimisation:** every drawing uses the same invented cast and invented schools, except CIT-U, the pilot school; amounts and dates are sample values. The pull request template asks the author to confirm "Invented people only", and reviewers check it.
- **Contingency:** if real data is found, it is removed in a pull request at once and Adrian is told. Removing it from git history as well needs a force-push, which the "main: core integrity" ruleset forbids for everyone (`.github/rulesets/README.md`); Adrian would lift the rule, purge the history, and restore the rule.

Top risk 2: `T3`, cross-tenant data leakage through row-level security

- **Avoidance:** the SRS takes every scope decision from the signed session token, never from the address (FR-IAM-001, FR-IAM-002), and a record outside a person's scope comes back as zero rows, never an error (FR-IAM-003, NFR-SEC-001).
- **Minimisation:** the design draws the wrong person's view, not only the right one: swimlane 01, steps S01.10 to S01.12, where a record outside the session's scope returns nothing; the "Nothing to show" screen (`nothing-found`); and swimlane 10, where a scholar or coordinator who opens a record's history gets no rows (S10.6, S10.8). The prototype tested this model with a policy test suite that talked to the database directly; it is preserved at tag `prototype-final` in the archive.
- **Contingency:** a swimlane or screen that shows one school's or one region's data to another is a blocking finding in review, fixed before the pull request merges (AGENTS.md, "Reviewing a pull request").

Top risk 3: `P1`, design drift across the team and their AI agents

- **Avoidance:** the chain. Each deliverable is built only from the one before it; every swimlane step is numbered; every wireframe names the steps it serves; every high-fidelity screen has its wireframe's name and a comment with its context. The SRS changes only when Adrian says so, with a new revision row (AGENTS.md, "The rules of the chain" and "Git and pull requests").
- **Minimisation:** every agent reads AGENTS.md first, and everything is written in full, so decisions and their reasons are in the repository rather than in a chat (AGENTS.md, "Write everything in full"). Every change is a pull request with one approval, and the checks on it verify formatting, that every drawing has its pictures, and the title, branch and body.
- **Contingency:** if the drawings disagree with each other or with the SRS, the step numbers and the folder indexes show where, and the correction is one pull request that updates every file the change affects. When drift became too much in the old repository, where members' agents got lost among documents about a deleted prototype, the team rebuilt the repository from the SRS on 7 October 2026.

Part 3: Work breakdown structure (WBS) and Gantt chart

Project schedule: 17 August 2026 to 10 December 2026 (17 weeks, design only).

Dates are what happened where the record shows it, and the submitted plan otherwise. The "Dates from" column says which: **git** (commit dates in the archive or this repository), **SRS** (the SRS's revision history), **record** (the dates the research itself records) or **plan** (the version submitted on 11 September 2026). Dates are in Philippine time.

1. Work breakdown structure

WBS code	Task	Start	End	Dates from	Predecessors	Status	Deliverable
1.0	**Empirical discovery and problem formulation**	**2026-08-17**	**2026-09-25**		—	**Done**	**Concept paper and audit baseline**
1.1	Live Google Drive audit: security and metadata	2026-08-28	2026-08-30	record	—	Done	Folder audit (SRS §1.1; concept paper §2.5)
1.2	Legal and contract analysis: RA 7687, RA 10173, the Agreement	2026-08-20	2026-08-26	plan	—	Done	Legal basis (concept paper §10)
1.3	Commission on Audit reports and Citizen's Charter benchmarks	2026-08-25	2026-08-30	plan	1.2	Done	Service standard analysis (concept paper §2.4)
1.4	Concept paper, to revision 0.4	2026-08-29	2026-09-25	git	1.1, 1.2, 1.3	Done, archived	`docs/00-concept-paper.md` (archive)
2.0	**Requirements engineering and specification**	**2026-09-05**	**2026-10-07**		**1.0**	**Done**	**SRS**
2.1	SRS 1.0: reverse-engineered SRS and design document	2026-09-05	2026-09-05	SRS	1.4	Done	SRS 1.0
2.2	SRS 2.0: scope realigned to the release pipeline and tuition settlement	2026-09-14	2026-09-14	SRS	2.1	Done	SRS 2.0
2.3	SRS 2.1: Central Office and administrator roles, release, tuition, benefits	2026-09-25	2026-09-25	SRS	2.2	Done	SRS 2.1
2.4	SRS 2.2: moved into this repository, links pointed at the archive	2026-10-07	2026-10-07	SRS	2.3	Done	`01-srs/SRS.md`
3.0	**Architecture and detailed subsystem design**	**2026-08-29**	**2026-09-25**		**1.0**	**Done, archived**	**Architecture and ADR suite**
3.1	Architecture: C4 view, multi-tenancy, global ERD	2026-08-30	2026-09-25	git	—	Done, archived	`docs/01-software-architecture-design.md`
3.2	Trade-off analysis: ADRs 0001 to 0015	2026-08-29	2026-09-25	git	—	Done, archived	`docs/adr/`
3.3	Subsystem designs, nine documents	2026-08-30	2026-09-11	git	3.1	Done, archived	`docs/design/`

WBS code	Task	Start	End	Dates from	Predecessors	Status	Deliverable
3.4	Software design protocol: four artifacts per feature	2026-08-30	2026-08-30	git	—	Done, archived	`docs/03-software-design-protocol.md`
3.5	Working prototype, to test the design; removed when the repository became design-only	2026-08-29	2026-09-24	git	3.1, 3.2	Done, archived	Tag `prototype-final`
4.0	**UI/UX design**	**2026-08-30**	**2026-11-14**		**2.0, 3.0**	**In progress**	**Swimlanes, wireframes and finished screens**
4.1	Brand guidelines: colour tokens, type, accessibility	2026-08-30	2026-09-25	git	—	Done, archived	`docs/02-brand-guidelines.md`
4.2	First swimlanes and wireframes, in Figma	2026-09-25	2026-10-05	git	2.3	Superseded	`docs/FIGMA.md` and the Figma file
4.3	First high-fidelity prototype: the scholar portal	2026-10-05	2026-10-05	git	4.2	Superseded	`docs/hifi/`
4.4	Rebuild: a new, design-only repository started from the SRS	2026-10-07	2026-10-07	git	2.4	Done	`dreeyanzz/seiskolar`
4.5	Swimlanes: 10 workflows, 107 numbered steps	2026-10-07	2026-10-12	git	4.4	Done	`02-swimlanes/`
4.6	Low-fidelity wireframes: 29 screens, phone, tablet and desktop	2026-10-07	2026-10-12	git	4.5	Done	`03-low-fidelity/`
4.7	High-fidelity screens: the clickable prototype	2026-10-07	2026-10-12	git	4.6	Done	`04-high-fidelity/`
4.8	Every file written in full, for the agents that read it	2026-10-12	2026-10-12	git	4.7	Done	`AGENTS.md`, folder READMEs, screen comments
4.9	The design copied into Figma as editable layers; the earlier file labelled	2026-10-26	2026-11-01	plan	4.7	In progress	`tools/figma/`
4.10	High-fidelity screens' repeated parts made into Figma components	2026-11-02	2026-11-14	plan	4.9	Planned	Components in the Figma file
5.0	**Risk analysis and verification planning**	**2026-09-11**	**2026-11-27**		**4.0**	**In progress**	**Risk matrix and verification plans**
5.1	Risk matrix, WBS and Gantt chart: submitted, then updated for the new repository	2026-09-11	2026-10-12	git	—	Done	This document
5.2	Cross-tenant denial test matrix: who must get zero rows, per role and record	2026-11-15	2026-11-21	plan	5.1	Planned	Denial test plan (place not yet decided)
5.3	End-to-end journeys: test scenarios across the swimlanes	2026-11-19	2026-11-24	plan	5.2	Planned	Journey test matrix (place not yet decided)
5.4	Traceability: check the SRS's matrix against the swimlanes and screens	2026-11-23	2026-11-27	plan	5.3	Planned	Traceability check (place not yet decided)

WBS code	Task	Start	End	Dates from	Predecessors	Status	Deliverable
6.0	**Consolidation, walkthrough and presentation**	**2026-11-25**	**2026-12-10**	plan	**5.0**	**Planned**	**Final presentation and design defence**
6.1	Review and polish the whole design package	2026-11-25	2026-12-01	plan	5.4	Planned	The design package
6.2	Walkthrough of the clickable prototype	2026-11-30	2026-12-05	plan	6.1	Planned	Walkthrough script
6.3	Presentation slides and rehearsals	2026-12-04	2026-12-09	plan	6.2	Planned	The slide deck
6.4	**Final milestone: the Software Design presentation and defence**	**2026-12-10**	**2026-12-10**	plan	6.3	**Planned**	**Presentation day**

The design work planned for 13 October to 14 November 2026 (submitted tasks 3.1 to 4.4) finished early. Tasks 4.9 and 4.10, added on 26 October 2026 when the course was found to need the design in Figma, fill 26 October to 14 November; their dates are a proposal for the team to confirm. 13 to 25 October had nothing scheduled.

2. Gantt chart: SEIskolar Software Design, 17 August to 10 December 2026

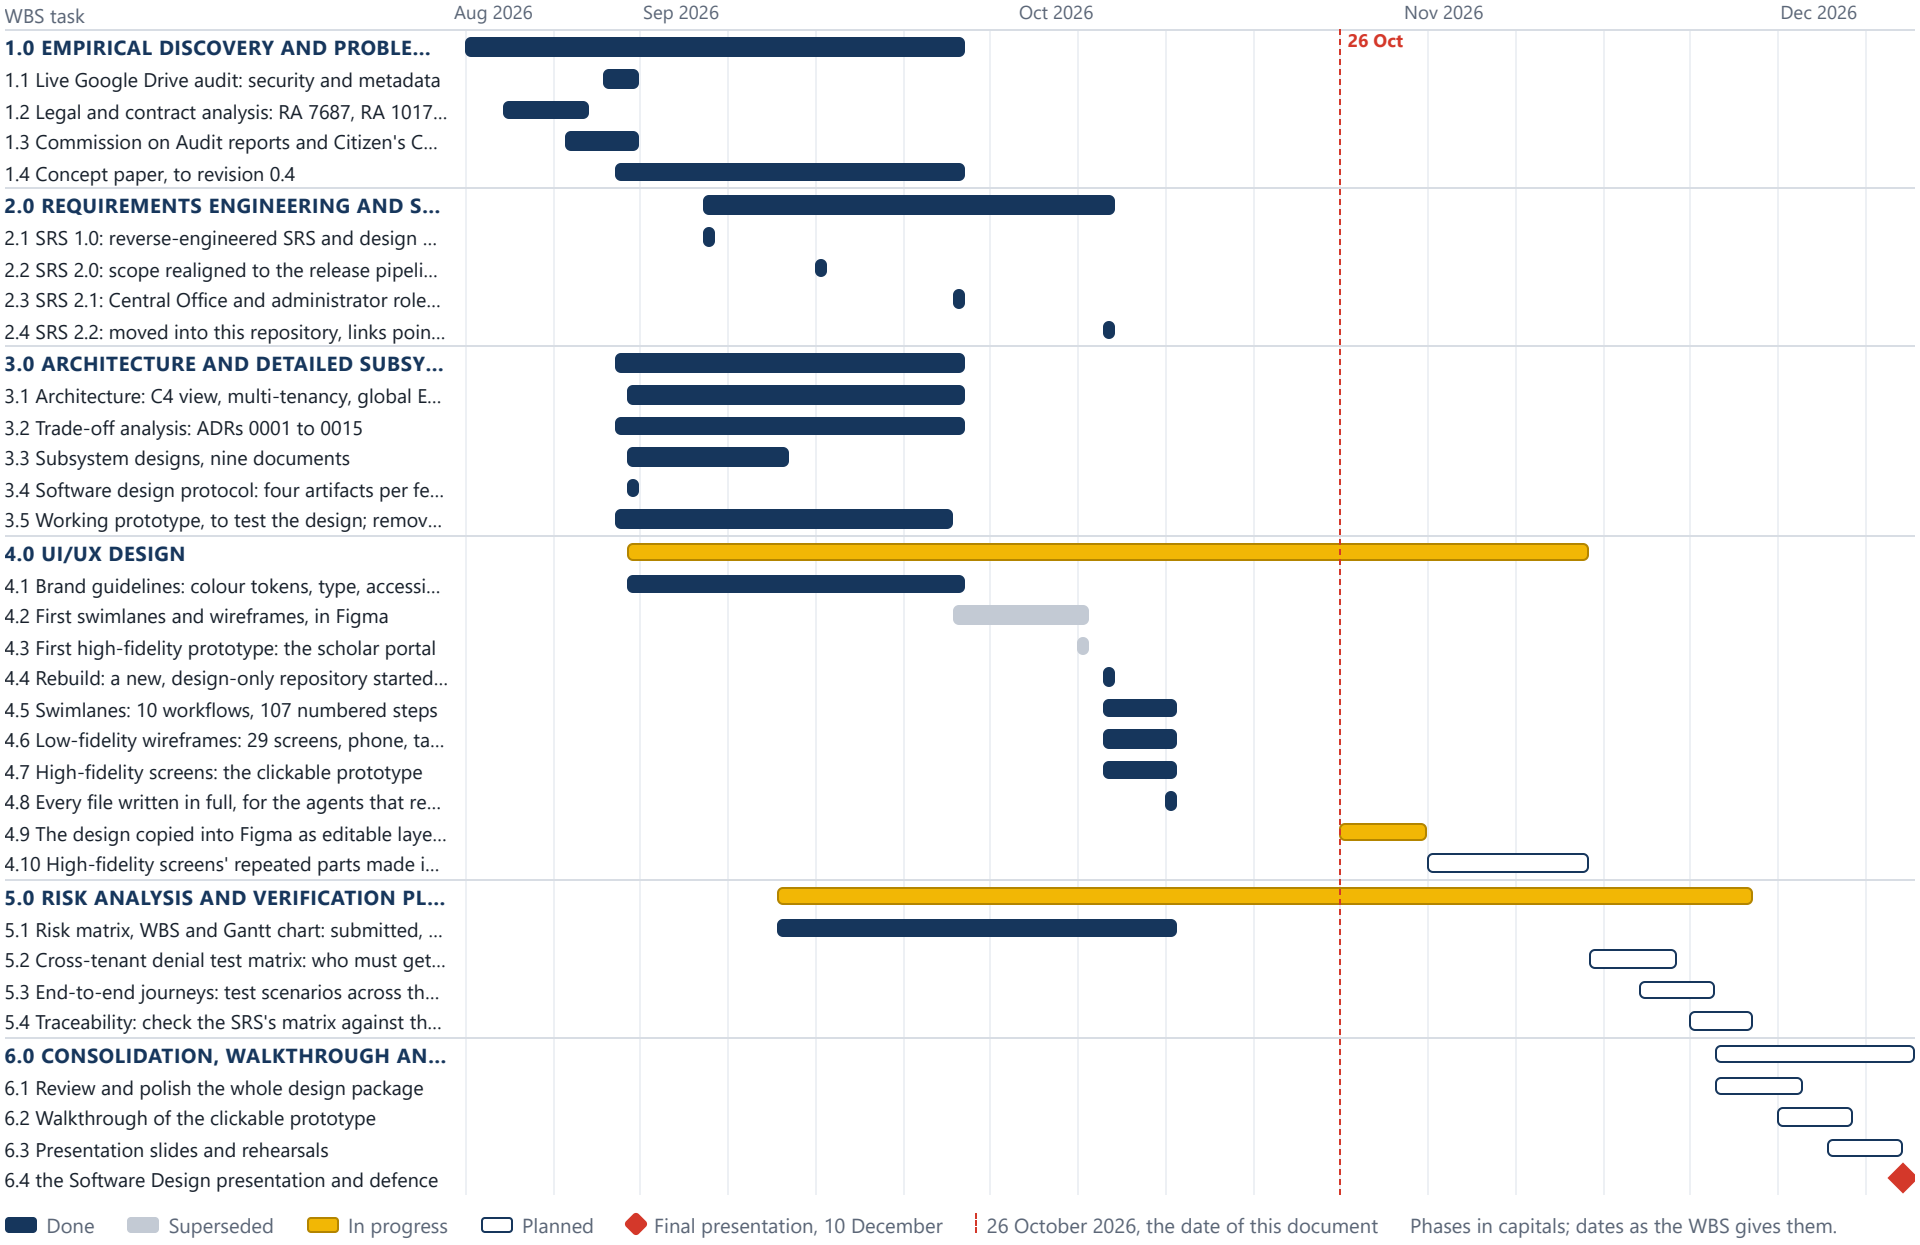

Task dependency network

The phases of the WBS and what each waits for (its Predecessors column), with their dates and status. The submitted package of 11 September drew the same network; the dates here are the updated ones.

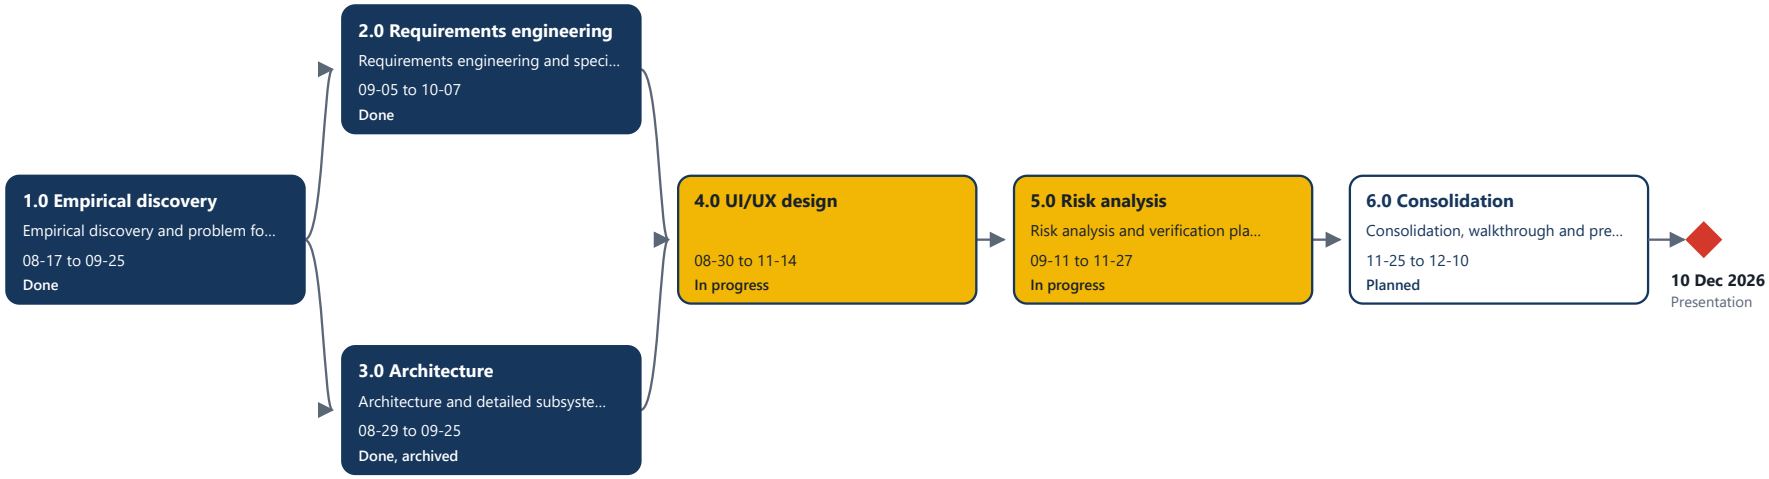

Still open

- **The proposed ratings.** The new T2 and E1, and their likelihood and impact, are this update's proposals. The team confirms or changes them.
- **Figma, the import itself.** Settled on 26 October 2026: the course needs the design in Figma, as editable layers. The tools are in `tools/figma/` and were checked without Figma (every view exported, previewed and drawn into a stand-in for Figma). The import into the real file needs a Windows or macOS computer with Figma desktop, so a member runs it there (WBS 4.9); its first run is also the builder's first test in Figma.
- **Figma, components.** Who turns the high-fidelity screens' repeated parts into components (WBS 4.10), and whether the course wants them on the low-fidelity page too.
- **The SRS's traceability matrix** (§7.2) says designed requirements trace "to the Figma screens". They trace to the swimlanes and screens in this repository, and to their copies in the new Figma file. Changing that line is Adrian's call, in its own pull request (AGENTS.md).
- **Where the verification plans go.** Tasks 5.2 to 5.4 do not have a place in this repository yet.
- **The empty weeks.** 13 to 25 October 2026 had nothing scheduled; tasks 4.9 and 4.10 now fill 26 October to 14 November, as a proposal.

How this document was made

Sources

- Built on 26 October 2026 from the repository dreeyanzz/seiskolar at commit 8f5d06b (branch `repo/even-screen-owners`, 2026-10-26), which holds the even division of the screens between the five members.
- Every picture of a swimlane, wireframe or screen is the repository's own PNG, as `npm run render` drew it from the HTML in Microsoft Edge. None is retouched or redrawn: 262 pictures.
- Titles, owners, states and the steps each screen serves come from the folder indexes; each swimlane's lanes and steps, and each wireframe's notes and trace line, from the drawings themselves; the requirement names from the SRS, version 2.2; Part E from `05-risk-matrix-and-gantt/RISK-MATRIX-AND-GANTT.md`.
- The Figma pictures in Part D were exported from the team's Figma file through the team's own bridge (`tools/figma/`), only reading it.
- Checks made while building: every screen has its phone, tablet and desktop picture in every state; the low-fidelity and high-fidelity indexes list the same screens with the same owners; every step a screen cites exists; the steps no screen serves are exactly the five the low-fidelity index names; every risk score is its likelihood times its impact.

Invented people and numbers

Every person in the drawings is invented, with `@example.test` addresses and scholar numbers that are plainly fake; every school but CIT-U, the pilot school, is invented. Amounts and dates are sample values, not DOST's rates. CIT-U's crest is a stand-in, not its seal. This follows the SRS's synthetic data mandate (§2.3) and risk O1 (Part E).

Links

The repository is private: its links open for members of the team. The Figma file opens for those Adrian has invited.

AI assistance

Compiled from the repository with Claude Code, an AI assistant, at Adrian Seth Tabotabo's request. Each member reviews the items they own.